Quality

We introduced roller shutter to our offer in 1997, you have to check it, it has been 25 years. Our proprietary designs are the result of work of our own research and development department.

Service

Professional and fast service is Drutex's calling card, which, for years, has been implementing the latest trends in pre- and post- sale Customer service.

Security

The roller shutters are equipped with an electric drive with detection, which affects the security level of their use.

Smart Home

Drutex's roller shutters and venetian blinds can be equipped with an intelligent control systems, compatible with windows, doors, gates or even home lighting and alarm systems.

DRUTEX
WINDOWS DOORS SHUTTERS GATES

Official Partner of FC Bayern

ul. Leszka Gierszewskiego 1, 77-100 Bytow
+48 59 822 91 01

SINCE 1985

The information presented in this advertising material are informative and illustrative only. The product specification should be verified with the technical data specified by the manufacturer.

07-2025 Issue

DRUTEX
WINDOWS DOORS SHUTTERS GATES

Official Partner of

ROLLER SHUTTERS
VENETIAN BLINDS
INSECT SCREENS

MADE OUT OF PASSION
AND EXPERIENCE

TABLE OF CONTENTS

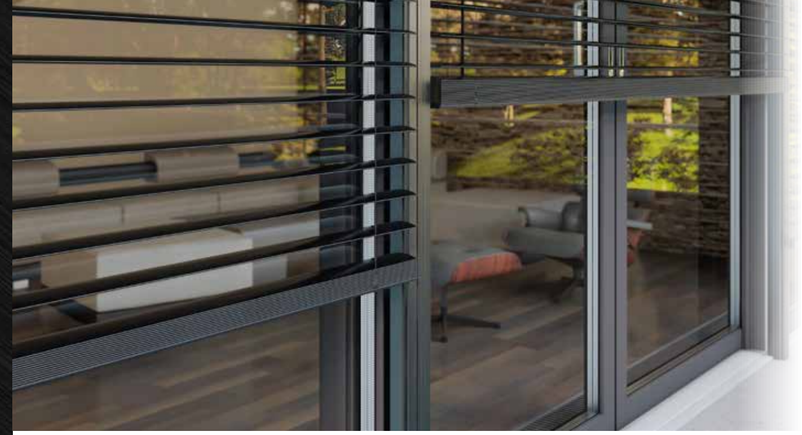

ROLLER SHUTTER SYSTEMS

RN Top-mounted Roller Shutters 06
Technical Specification 08
RS Top-mounted Roller Shutters 12
Technical Specification 14
RA Adaptive Roller Shutters 18
Technical Specification 20
Roller Shutter Colour Scheme 24

EQUIPMENT 26

VENETIAN BLINDS 28

SMART HOME INTELLIGENT CONTROL 30

PLEATED INSECT SCREENS 32

APPLICATION OF WINDOW SHUTTERS 34

MORE OF OUR PRODUCTS 42

Windows 44
Doors 45
Terraced systems 46
Facades, winter gardens 47

ROLLER SHUTTER SYSTEMS

RN Top-mounted

RN 175, 215/225

A system of roller shutters integrated with the window, possible to apply during the construction of the house or when replacing the windows. Rich colour array of boxes and roller guides, made of PVC or aluminium, as well as, variety of roller shutters' drives and protections, meet the customer expectations and modern building requirements.

p. 6

RS Top-mounted

RS 260, 300, 365, 425

Characterised by high acoustic and thermal insulation. Styrofoam roller shutter boxes, due to the innovative solutions and wide range of installation depth, can be used in any type of construction. Thanks to the wider winding diameter of the box, they are perfect for large glazing.

p. 12

RA Adaptive

RA 90°, 45°, Ow

Aluminium adaptive roller shutters have been designed for installation in both new and old buildings. Thanks to variety of shapes, sizes, and colours, in many cases they add a decorative element to the building. The undoubted advantages of this system are its various installation options.

p. 18

Venetian Blinds

ZF-A 240, 300, 350
ZF-S 260, 300, 365, 425
ZF-A NEW 240, 300, 350

Venetian Blinds are perfect for large glazing, protecting what is the most important-comfort of use. Thanks to unique solutions, such as adjustable slat angle, an obstacle-detection motor, and the option of smartphone control, they provide the buyer with the highest level of comfort.

p. 28

RN TOP-MOUNTED ROLLER SHUTTERS

BOX — ROLLER GUIDES

p. 8 p. 10

DRUTEX
OKNA DRZWI ROLETY BRAMY

RN TOP-MOUNTED ROLLER SHUTTERS

RN 175, 215/225

PROTECTION AND AESTHETICS

Drutex's system of top-mounted roller shutters facilitates installation of the box from the inside and outside and therefore, only the roller guides, aluminium roller shutter curtain and the bottom revision cover are visible, which is an expression of modern construction referring to current trends in design.

Drutex's top-mounted roller shutters are a result of our own research and development department. Multiple innovative solutions, ensuring not only a comfort of use, but also excellent parameters in terms of energy efficiency have been implemented there. **The roller shutter can be equipped with an electric motor with detection**, which makes an influence on the security level. It can be controlled, among others, from a smartphone.

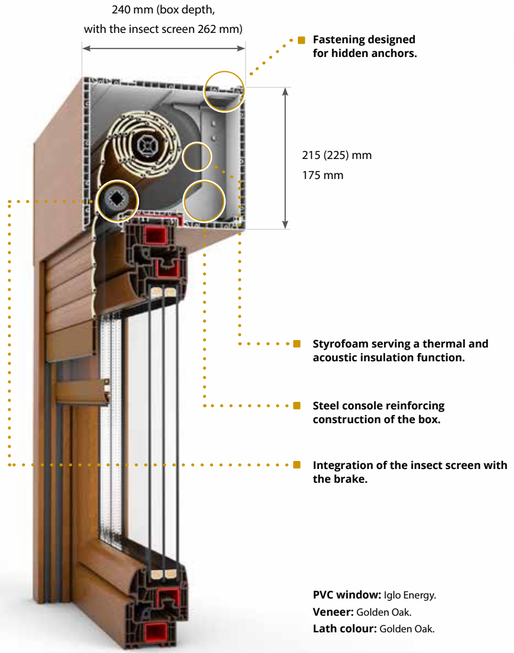

ALUMINIUM LATHS	HEIGHT	BOX	CONSOLE
filled with polyurethane foam	175 mm and 215 mm or 225 mm (depending on the window system)	side of the box in the shape of a rectangle with a revision	steel

DRUTEX
OKNA DRZWI ROLETY BRAMY

TECHNICAL SPECIFICATION

ROLLER GUIDES

Wide range of types and colours of the roller guides allows matching an optimal solution to the customer's preferences.

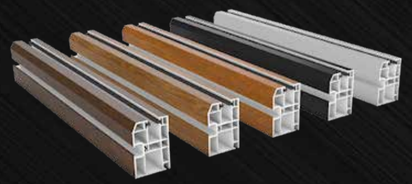

AVAILABLE GUIDES



Roller guide (PVC) one-sided MINI.
R0001



Roller guide (PVC) two-sided MINI.
R0002



Roller guide (PVC) one-sided + MKT*.
R0003



Roller guide (PVC) two-sided + MKT*.
R0004



Roller guide (PVC) two-sided MAXI.
011309029



Roller guide (ALU) one-sided / two-sided
01130903BL

*insect screen.

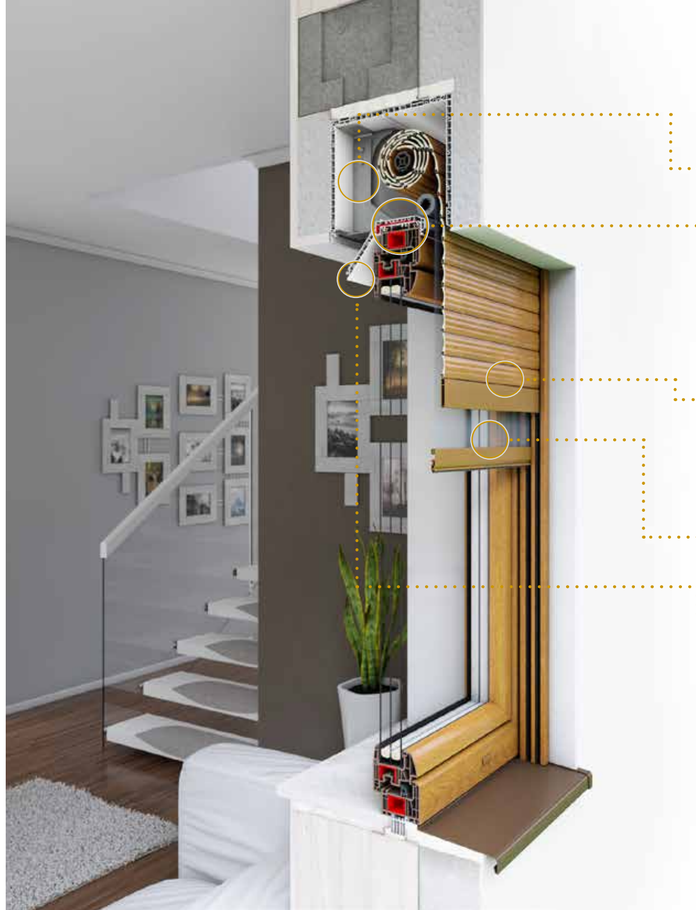

- **A steel console in the Drutex's roller shutters** allows to obtain an optimal rigidity of the construction.
- **A roller shutter's adapter – original project for Iglo 5, Iglo LIght, Iglo Energy, Iglo Edge systems** equipped with a sealing, which ensures an optimal tightness and allows to obtain perfect parameters in terms of thermal insulation and air permeability.
- **A specially designed reinforcement** ensures an optimal rigidity of a system, as well as, wind resistence.
- **A 37 mm, 42 mm and 55 mm high laths are available**in various colour variants, enabling a full project arrangement. Depending on the installed window and used adapter the box height is 215 mm for Iglo 5, Iglo Energy and Iglo Edge systems, and 225 mm for all other Drutex's systems. Sizes: 175 mm are used for window systems of a smaller measurements.
- **A roller shutter has been designed so that,** the installation of an insect screen would be possible from the outside and from the inside of the roller shutter curtain.
- **An access to the box,** for service works, is possible after opening the revision which is placed on the bottom or front of the box.

A possibility of applying a plaster carrier and flush-mounted bar for to integrate with the building's facade.

A bottom slat with a hidden stop for RN 215/225.

RS TOP-MOUNTED ROLLER SHUTTERS

BOXES TYPES — ROLLER GUIDES

p. 14 p. 16

RS TOP-MOUNTED ROLLER SHUTTERS

ROLLER SHUTTERS WITH STYROFOAM BOX

with revision from the outside.

with revision from the inside.

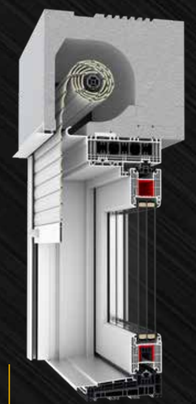

for HS system revision from the outside.

SECURITY

AND ECONOMY

Owing to the fact that the system already has flush-mounted slats as standard, the boxes are prepared for direct plastering. The consoles, which we use, allow installation on larger-sized window suite products while maintaining stability of the entire construction.

The product enables also matching the box depth to the wall depth. In the offer boxes of the following dimensions: 260 mm, 300 mm, 365 mm and 425 mm.

EVEN BETTER INSULATION

Great thermal and acoustic insulation parameters ensure high comfort of use. The box itself, as standard, provides mute on the level up to 49/47 dB. The roller shutters also have a significant impact on reducing the heat loss in a building.

Revision from the inside

Box size	U thermal insulation	dB acoustic insulation
260/275 mm	0,79	45/45
300/308 mm	0,67	45/44
365/308 mm	0,57	45/44
425/308 mm	0,54	-

Revision from the outside

Box size	U thermal insulation	dB acoustic insulation
260/243 mm	0,65	48/47
300/308 mm	0,46	49/47
365/308 mm	0,37	49/47
425/308 mm	0,34	47/46

Boxes types



260 mm box for under the clinker.



260 mm box.



300 mm box.



365 mm box.



425 mm box.

DRUTEX
OKNA DRZWI ROLETY BRAMY

TECHNICAL SPECIFICATION

ROLLER GUIDES

PVC ROLLER GUIDES

One-sided (PVC) roller guide - RS revision from the inside.
MKM928(7)



Divisive (PVC) roller guide - RS revision from the inside.
MK939



One-sided (PVC) roller guide + MKT* - RS revision from the inside.
MK8110



One-sided (PVC) roller guide + MKT* - RS revision from the outside.
MK8120 + MK9760



One-sided (PVC) roller guide - RS revision from the outside.
MK933 + MK9760



Divisive (PVC) roller guide - RS revision from the outside.
MK933 + MK9730



Divisive (PVC) roller guide + MKT* - RS revision from the outside
MK8120 + MK9730

ALUMINIUM ROLLER GUIDES



One-sided (ALU) roller guide - RSW
A927



Double-sided (ALU) roller guide - RSW
A939



One-sided (ALU) roller guide - RSZ
A973+A933

*insect screen.

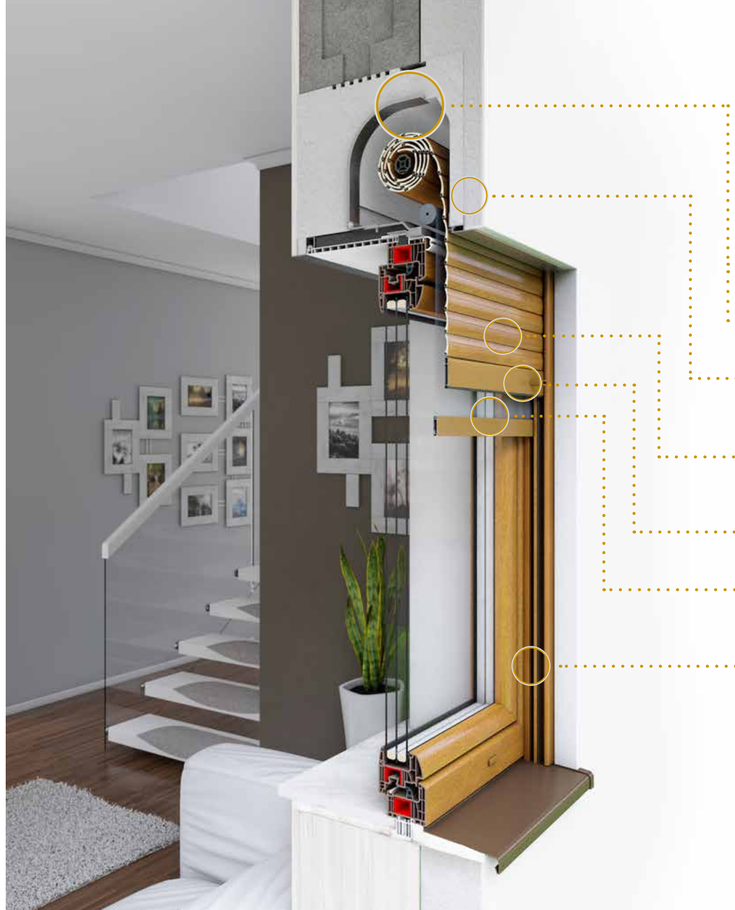

- **Great thermal and acoustic insulation.**
- **The roller shutter's box is made of EPS styrofoam,** (expanded polystyrene).
- **Thanks to the applied steel console, it is possible to fasten the box directly to concrete lintels.**
- **A roller shutter's construction and building facilitates the process of installation, plastering and facade's tooling.**
- **Laths filled with polyurethane foam, with a width of 37 mm, 42 mm and 55 mm** are available in various colour variants, enabling a full project arrangement.
- **A bottom slat,** available in various options from the RAL palette.
- **Installation of an insect screen is possible from the inside of the roller shutter's curtain,** which significantly affects the construction's functionality.
- **A roller guide** available in our array of Renolit colours.

A possibility of applying aluminium roller guides.

RA ADAPTIVE ROLLER SHUTTERS

BOXES TYPES — ROLLER GUIDES

p. 20 p. 22

DRUTEX
OKNA DRZWI ROLETY BRAMY

ADAPTIVE ROLLER SHUTTERS

ALUMINIUM ROLLER SHUTTER SYSTEM

90° FLUSH-MOUNTED ROLLER SHUTTER

Dimensions: 137x137 mm, 165x165 mm, 180x180 mm or 205x205 mm (width and height of the box). The flush-mounted roller shutter has an external revision. Thanks to the plaster carriers (extra option), it is suitable for a direct plastering. It can be installed in the external insulation of the building.

OVAL ROLLER SHUTTER

Dimensions: 139x144 mm, 167x171 mm, 182x188 mm (width and height of the box). Thanks to its shape, it makes an interesting decorative element of the building.

45° ROLLER SHUTTER

Dimensions: 137x137 mm, 165x165 mm and 180x180 mm (width and height of the box). The system is made of a bent sheet. Due to the use of 45° angle bent, it is characterised with a high construction rigidity. Easy revision access allows any maintenance service without disassembling the roller shutter.

A system of external aluminium roller shutters is designed for application in the already existing buildings or ones being under construction. The roller shutter is entirely made out of aluminium, available in the chosen colour shades from the RAL palette and wooden-like colours. Its rigid construction is ensured by the high quality materials and well-thought-through construction, which is a result of the work of our own research and development department and that allows matching to any architectural style. A sheet which makes the cover of the console, is a subject to a unique system of multiple bends what increases its strength.

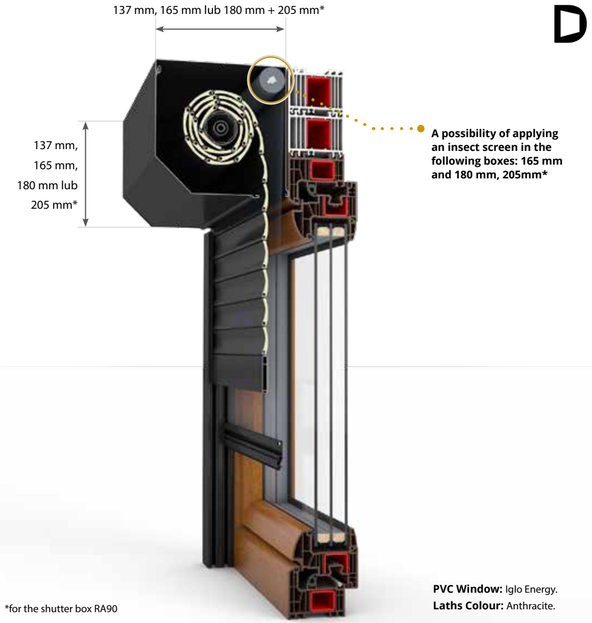

*for the shutter box RA90

PVC Window: Iglo Energy.
Laths Colour: Anthracite.

ALUMINIUM LATHS

filled with polyurethane foam

HEIGHT

137 mm, 165 mm, 180 mm or 205 mm
(depending on the system)

BOX

revision from the outside

DRUTEX
OKNA DRZWI ROLETY BRAMY

TECHNICAL SPECIFICATION

ROLLER GUIDES

Availability of various system and colour variants allows matching an optimal solution to the customer's preferences.





One-sided roller guide (for H37 and H42 laths).
87857



Two-sided roller guide (for H37 and H42 laths).
87858



One-sided roller guide with an insect screen (for H37 and H42 laths).
87859



Two-sided roller guide (ALU) + MKT
87858 x2



Angle roller guide (for H37 and H42 laths).
87856



One-sided roller guide (for H55 laths).
PP6600

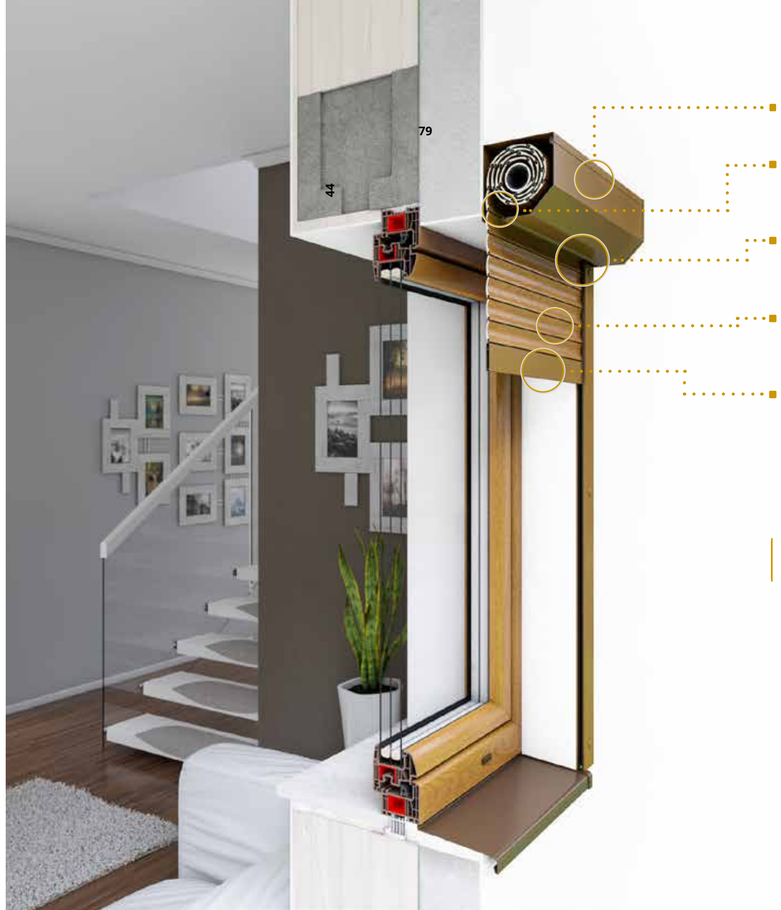

- **A roller shutter box, thanks to a rich array of colours can be a decorative element of a building.**
- **Access to the box** for 45° roller shutter and oval roller shutter – from the front, while for flush-mounted roller shutters – from the bottom.
- **A box and roller guides** available in a rich RAL palette colours thanks to which the roller shutters are distinguished by aesthetics and modern look.
- **A roller shutter curtain is built out of aluminium profiles,** filled with polyutherane foam, rolled into a box located on the wall or in the window frame
- **A bottom slat with a hidden stop** available in the chosen colour options from the RAL palette, which allows to maintain the consistency with the building's facade and moreover, affects the elegance of the construction.

There is a possibility of making an insect screen **integrated with the roller shutter.**

Boxes and roller guides available in the colours of the RAL palette*.

*** Up-to-date list of colours available at www.drutex.eu and at dealer's.**
* Possibility of covering RA guides as well as the RA90 box with RENOLIT colors

Wood-like colors of boxes for RA45 at RA90
Walnut, Golden oak, Winchester, Turner oak.

* (not applicable to RA90)

DRUTEX
OKNA DRZWI ROLETY BRAMY

ROLLER SHUTTER COLOUR SCHEME

STANDARD

Laths filled with polyurethane foam, with a width of 37 mm, 42 mm and 55 mm, are available in various colour variants.

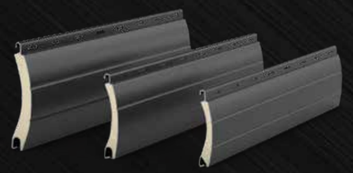

ROLLER SHUTTER CURTAIN COLOUR SCHEME

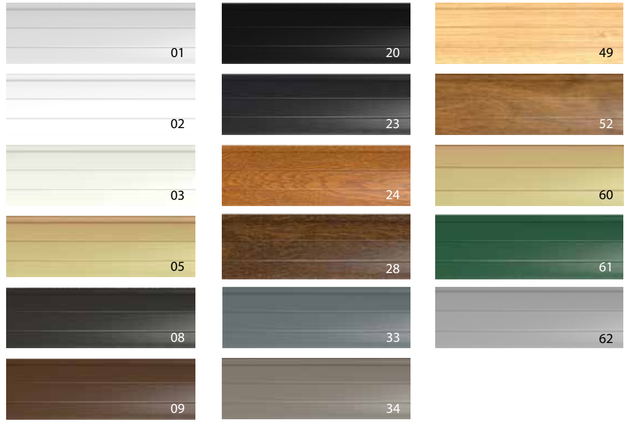

AVAILABLE COLOURS FOR THE PARTICULAR LATH HEIGHTS

01 Silver
02 White
03 Grey
05 Beige
08 Dark Brown
09 Brown

20 Black
23 Anthracite
24 Golden Oak
28 Nut
33 Basalt grey RAL 7012
34 Quartz grey RAL 7039

49 Turner Oak
52 Winchester
60 Ivory*
61 Moss Green
62 Grey Aluminium

02 White
03 Grey
08 Dark Brown
23 Anthracite
60 Ivory*

*Available for 42 mm and 55 mm slats, while stocks last

OPTIONAL

ROLLER GUIDES COLOUR SCHEME FOR RS + RA
ROLLER GUIDES AND BOXES COLOUR SCHEMES FOR RN ROLLER SHUTTERS

* Up-to-date list of colours available at www.drutex.eu and at dealer's

DRUTEX
OKNA DRZWI ROLETY BRAMY

EQUIPMENT

SYSTEM OF TOP-MOUNTED ROLLER SHUTTERS WITH A PVC BOX

Bottom slats



Roller shutter curtain bottom slat.

Insect screen bottom slat.

Adapter

Universal adapter as standard.

Options

Innovative elements of Drutex roller shutter construction, associated with the presence of the adapter and reinforcing console, distinguish the system from other producer's constructions, guaranteeing exceptional insulation and durability of the roller shutter.

Iglo Energy, Iglo Edge adapter.



Iglo 5 adapter.

Switches

PK1 – basic switch.

PKLU – key switch.

SMOOVE wall transmitter.

Remotes

Situo 5 io Pure II 5-channel remote.

Situo 1 io Pure II 1-channel remote.

SOMFY Situo 5 Var IO Pure II - 5 channel remote.

SOMFY Situo 1 Var IO Pure II – 1-channel remote.

Dedicated Drutex remote.

Rectractors and Cranks

Manual belt rectractor- 14 mm (maximum load up to 11 kg).

PKR gear with a disengaging crank (maximum load up to 20 kg).

PKS gear with a fixed crank (maximum load up to 20 kg).

Console

From 1800 mm stabilising console as standard.

WB hanger is mounted as standard for the electric drive (so called, hanger-blockade), which prevents the roller shutter curtain from being lifted up.

DRUTEX
OKNA DRZWI ROLETY BRAMY

VENETIAN BLINDS

Timeless look

COMFORT AND JOY OF USE

Venetian blinds are a perfect solution protecting room interior against excess of sunlight. Thanks to its installation, both in residential, and commercial buildings, such as; offices, hotels, public buildings, not only can provide more privacy, but also significantly decrease use of electric energy, which is being used by air conditioning systems. Drutex's venetian blinds are consistent with contemporary architectural trends, which favour large glazing where no other than facade type of shutters can be applied. What is important, this product can be used for both new and already existing buildings. Its great advantage is also a possibility of merging with an intelligent management systems, which allow controlling with a tablet or smartphone.

AVAILABLE LATHS FOR ADAPTIVE AND TOP-MOUNTED VENETIAN BLINDS

C80 Lath

S90 Lath

Z90 Lath

ADAPTIVE VENETIAN BLINDS

Available dimensions (width x height.):
140x240 mm, 140x300 mm, 140x350 mm.

TOP-MOUNTED VENETIAN BLINDS

Available dimensions (width x height.):
260x275 mm, 300x308 mm,
365x308 mm, 425x308 mm.

Thanks to the free adjustment of the angle of inclination of the laths, they enable an optimal level of shading and create a nice atmosphere in the rooms of the building. They reflect most of the sunlight in front of the window, ensuring comfortable conditions in the apartment or house. Controlling with a wireless remote controller or a smartphone. We recommend equipping venetian blinds with a weather station.



Single roller guide for ZF-A as standard.



Single roller guide for ZF-S as standard.

Possibility of applying a PVC roller guide for the box of top-mounted venetian blind.



A roller guide with a recessed profile for a maximum distance of 240 mm also available in the offer.

Available Lath Colours

RAL 7016	RAL 9005	RAL 9006	RAL 9007	RAL 9016	DB 703

For adaptive roller shutters and venetian blinds, we use matt paints.

DRUTEX
OKNA DRZWI ROLETY BRAMY

SMART HOME INTELLIGENT CONTROL

Comfortable management

Intelligent roller shutter control systems, using a remote controller, tablet or a smartphone, are becoming more and more popular among customers which allows to manage the system remotely when absent. There is a possibility of opening and closing the roller shutter separately or in groups, as well as, time programming and merging with other intelligent systems at home. It is an investment in comfort of use and functionality on the highest level.

TaHoma® switch

Windows, doors, roller shutters, venetian blinds, gates and wickets, which, thanks to the intelligent Somfy- TaHoma® switch control panel, can open and close themselves at a given time of the day. Moreover, they can tilt or slide in integrated groups or separately, at the same time ensuring a full control and surveillance of the house, even when nobody is there. TaHoma® switch also allows to manage the house and garden lighting.

BleBox product line

These are minature devices which allow opening and closing of doors, windows, roller shutters, awnings, venetian blinds, gates, as well as, managing the lightening and alarm systems with a smartphone or tablet- also from any place in the world.

Drutex dedicated remote controller.

Electric drives

Somfy RS100 IO

Modern Somfy radio drive, featuring obstacle detection, silent mode, and standard locking brackets. Wireless controlled and compatible with the Tahoma central unit.

SIMU Auto Job

Modern SIMU remote control drive featuring automatic end-position monitoring, obstacle detection, and overload protection.

YOODA EVY i R/S

This modern drive system includes an obstacle detection function and comes with a locking hanger for added security.

Selve Lineco/Simu (grupa Somfy)

This drive is equipped with electronic limit adjustment, obstacle detection, and supports wired control. Locking brackets included as standard

Solar-powered drives

SOMFY RS100 Solar io

This drive integrates seamlessly with the SOMFY TaHoma system, offering ultra-quiet performance and customizable speed settings tailored to individual user preferences.

SELVE SE Solar

Equipped with a locking hanger, the drive remains fully operational even at night, during winter, or on overcast days with minimal sunlight.

Drives with emergency opening

SELVE SP Rescue
(emergency exit)

A versatile drive equipped with a mechanical limit switch and fast emergency opening in just a few seconds.

SELVE SEE-NHK

Electric drive for roller shutters featuring mechanical emergency opening using a crank handle.

DRUTEX
OKNA DRZWI ROLETY BRAMY

PLEATED INSECT SCREENS

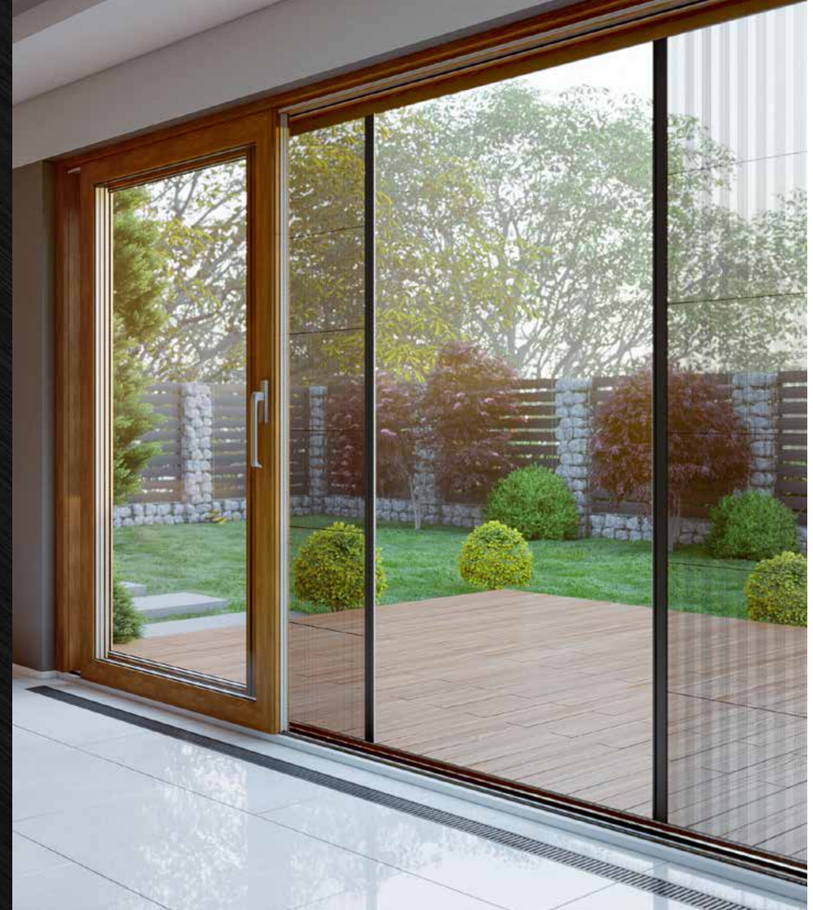

POSSIBLE VARIANTS

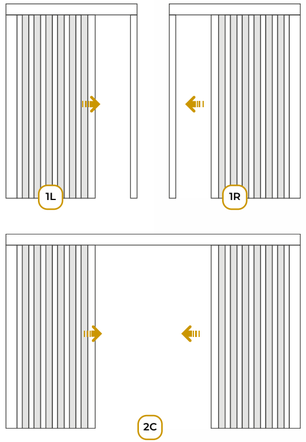

Maximum dimensions

Type of window suite	Width mm	Height mm
Single leaf	2400	2600
Double leaf	3600	2600

Minimum dimensions: 700 mm x 1900 mm (width x height).

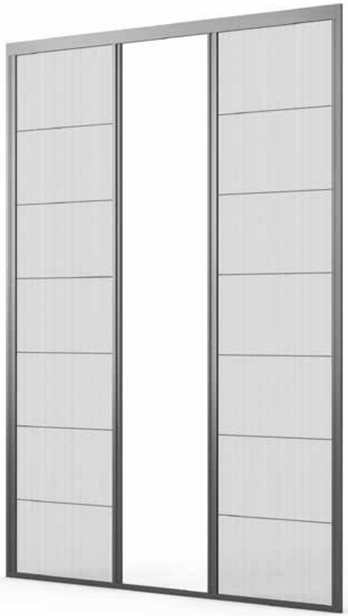

Well-thought-through and refined in the smallest detail design enables installation in the window recess, on the window frame, on the building's facade, and in our roller shutters' roller guides. The choice of matt colours allows for an aesthetic consistency with the facade of the building.

AVAILABLE COLOURS (MATT)

RAL 9016

RAL 9006

RAL 7016

RAL 8019

RAL 9005

*** Up-to-date list of colours available at www.drutex.eu and at dealer's**

RS 425 top-mounted roller shutters, Golden Oak colour.

APPLICATION OF WINDOW SHUTTERS

WINDOW SHUTTERS

RA 45° adaptive roller shutters, anthracite colour.

ZF-A venetian blinds, anthracite colour.

RS 365 top-mounted roller shutters, anthracite colour.

RS 365 top-mounted roller shutters, moss green colour.

WINDOW SHUTTERS

RA 45° adaptive roller shutters, brown colour.

RA 45° adaptive roller shutters, dark brown colour.

SEE MORE OF OUR PRODUCTS

WINDOWS

PVC
aluminium
wood
wood-aluminium

Our windows are distinguished by the highest quality, modern design, high resistance to unfavourable weather conditions as well as very good thermal and acoustic insulation. For production we use modern machines and devices from renowned global producers. Wide array of colours is provided by the Renolit foils (PVC windows), opaque and azure paints (wooden windows), and one of the most modern powder paint shops in the world (aluminium windows). Reliable fittings and other high quality additional equipment ensure the comfort of use.

DOORS

PVC
aluminium
wood

Drutex exterior doors mean very good thermal insulation parameters, various arrangement and functional possibilities as well as modern design and security. Highest quality components and equipment, used in the process of production, helped in creating product worthy of XXI century.

TERRACE SYSTEMS

Unique design, ensuring a great access of daylight to the house and at the same time maintaining excellent parameters in terms of energy efficiency. Great configuration possibilities allow to cope with the most demanding customers. Application of our systems will not only add character to the usable area, but also make the building look more attractive from the outside.

FACADES
WINTER GARDENS

Aluminium facades and winter gardens are the perfect choice for fans of innovative technologies, various arrangement and utility possibilities as well as modern design combined with outstanding security. The latest technology of powder painting ensures material protection even in the most demanding environmental conditions. Combined with the wide RAL colour palette and wood-like colours it makes an exceptional offer on the global market of the aluminium window suite products.