

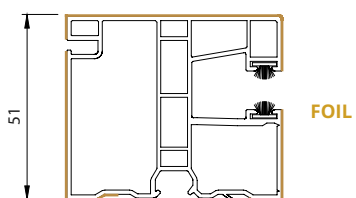



RN 175 | PVC TOP-MOUNTED ROLLER SHUTTER

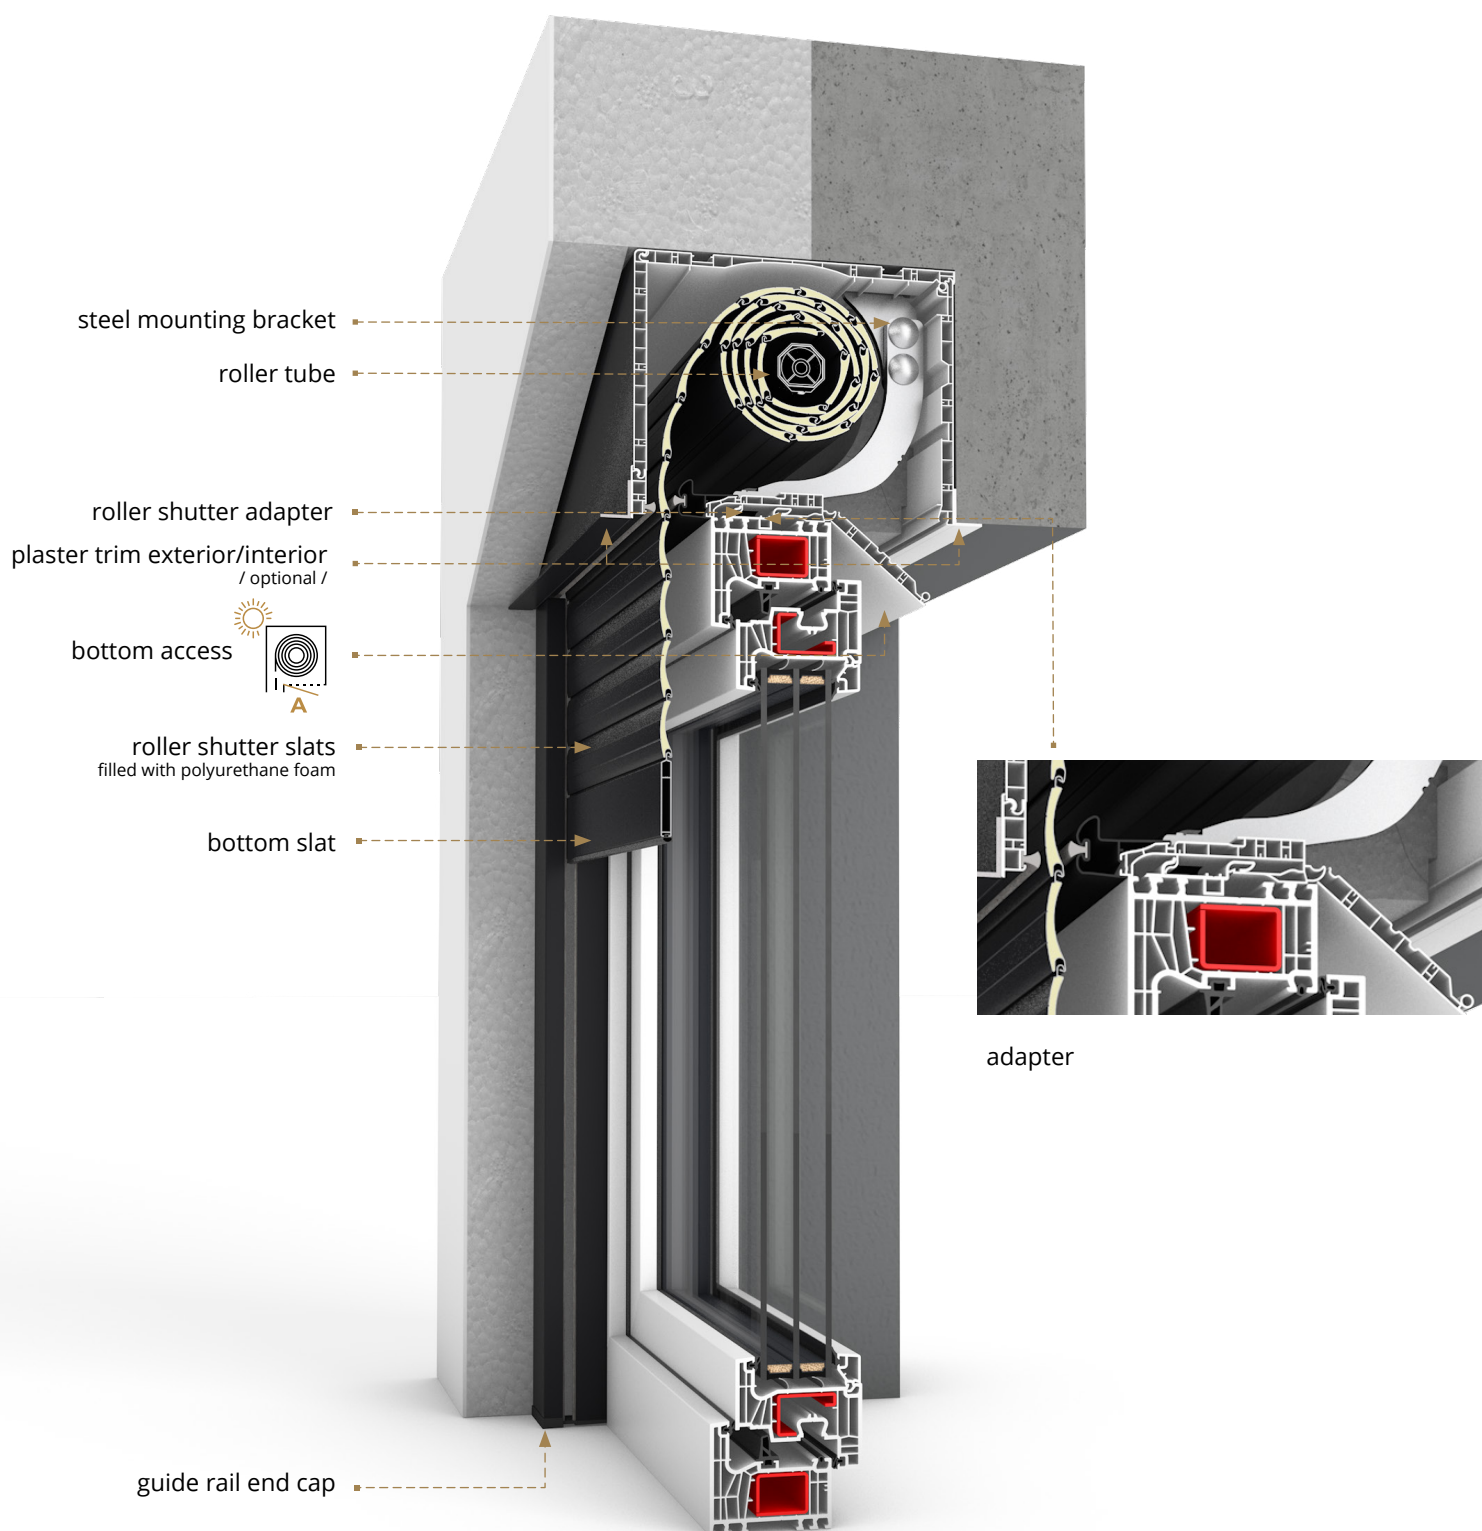

single guide rail

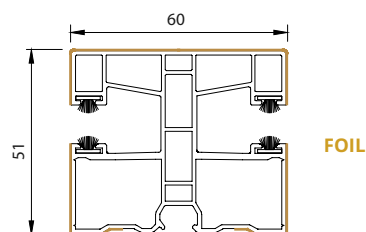

division guide

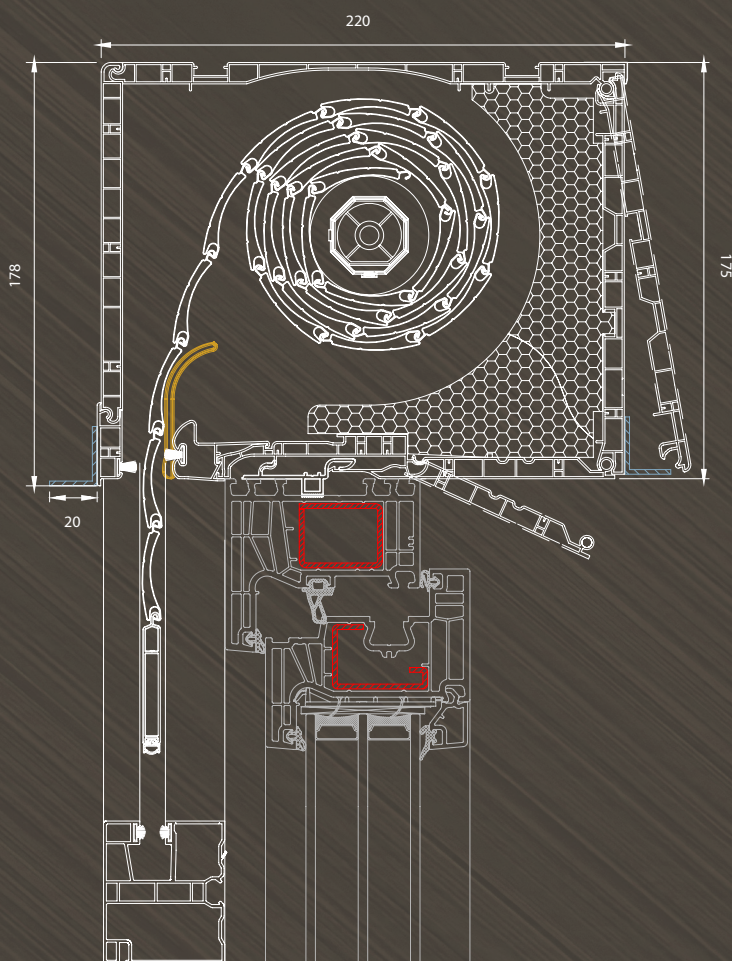

- headbox depth: 220 mm, with insect screen: 220 mm
- available aluminum slats: 37 mm, 42 mm
- two-piece static bracket is available for units with widths of 2400 mm and above, ensuring optimal structural rigidity
- PVC or aluminum guide rails
- specially designed reinforcement, used in units with widths of 1500 mm and above, provides optimal system rigidity and wind resistance
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter
- bottom rail with concealed stopper or buffer
- the roller insect screen can be installed at any stage, even after the roller shutter has been installed
- possibility of mounting the roller shutter to the window
- standard 5° angled bottom guide rail end cap

RN 175

175

installation height
/mm/

220

installation depth
/ mm /

0,84

U_{sb}



ALUMINUM SLATS

37mm | **42mm**



A



B

or

from the bottom

front side

inspection access

PVC

ALUMINUM

guide rail materials

PVC, aluminum, wood

max. window frame width: 164mm

compatible systems



Smart
Home