



RN 215 | PVC TOP-MOUNTED ROLLER SHUTTER

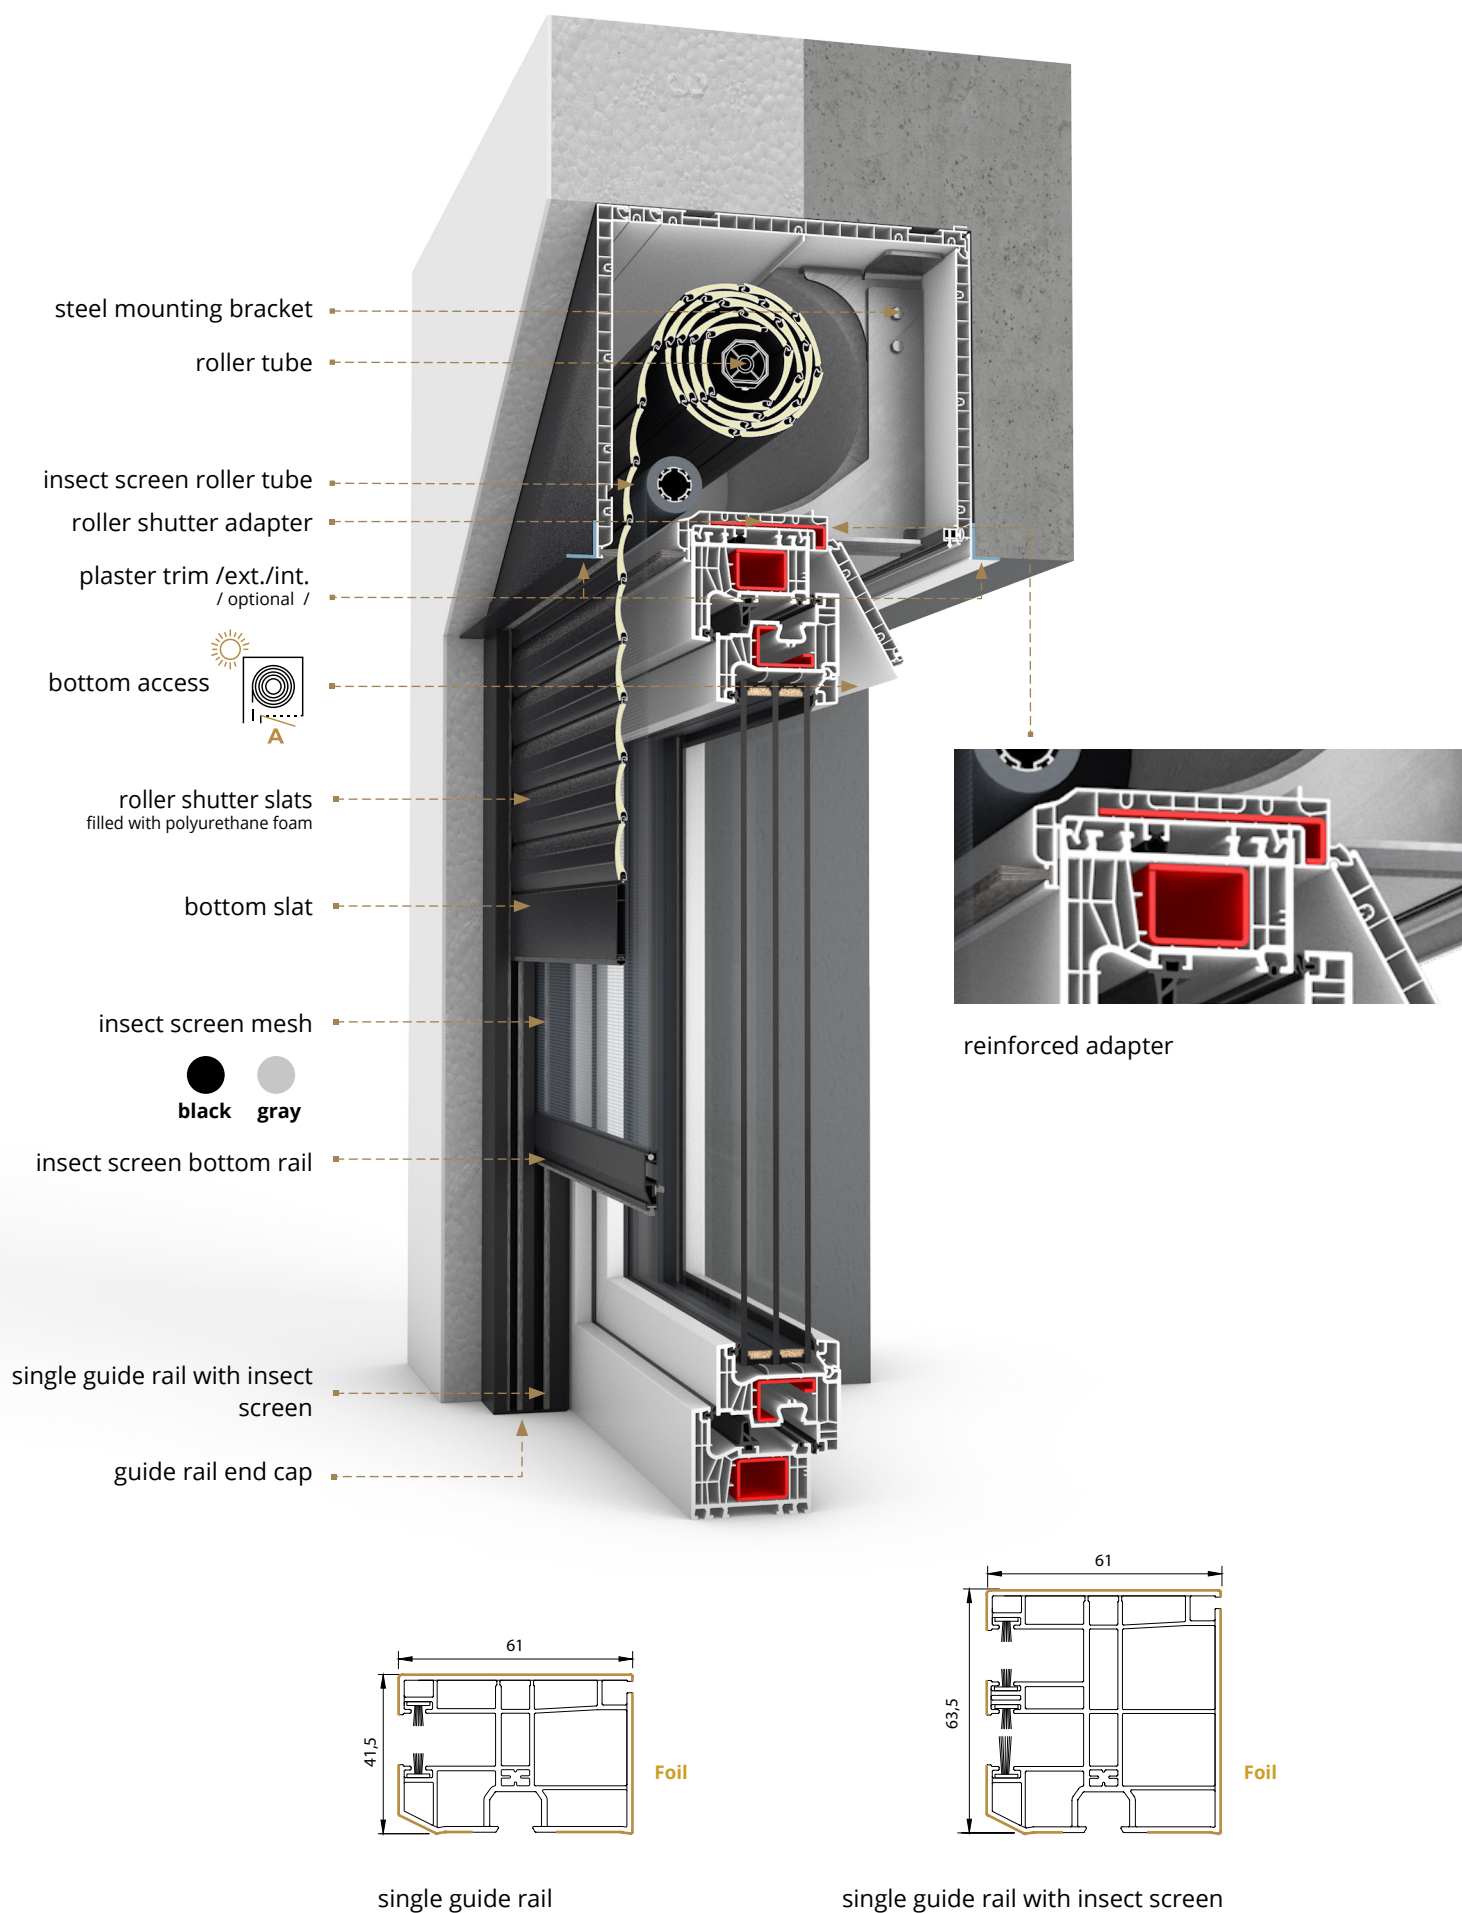

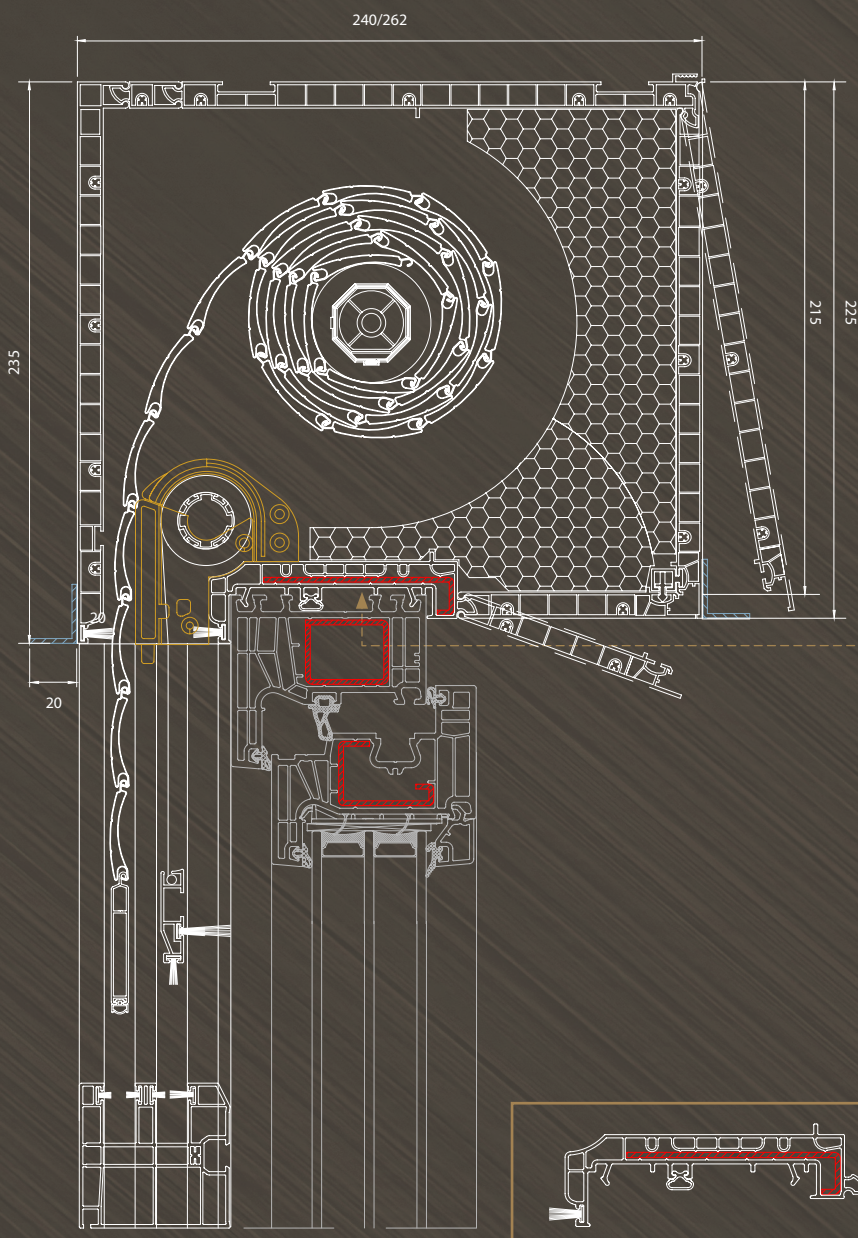

reinforced adapter

- headbox depth: 240 mm, with insect screen: 262 mm
- available aluminum slats: 37 mm, 42 mm, 55 mm
- the two-piece static bracket, available for widths of 1800 mm and above, provides optimal structural rigidity.
- the adapter is equipped with a sealing gasket, ensuring optimal airtightness and allowing excellent thermal insulation and air permeability performance.
- PVC, aluminum or wooden guide rails
- a specially designed reinforcement ensures optimal system rigidity and wind resistance.
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter.
- bottom rail with concealed stopper or buffer
- roller or pleated insect screen
- possibility of mounting the roller shutter to the window
- standard 5° angled bottom guide rail end cap

* for MKT headbox

RN 215

215

installation height
/mm/

240 / 262*

installation depth
/ mm /

0,78

U_{sb}

/ in combination with Iglo Energy /




ALUMINUM SLATS

37mm | 42mm | 55mm



A

or



B

from the bottom

front side

inspection access

PVC

ALUMINIUM

WOOD

guide rail materials

Iglo 5, Iglo Light, Iglo Energy, Iglo Edge, Iglo Slide

compatible systems



Smart
Home