



Quality

The latest technology, the best materials and production controlled at every stage as well as our own research laboratories guarantee the highest quality.



Service

Professional and fast service is the hallmark of Drutex, which has been setting trends in pre- and post-sales customer service for years.



Security

Doors are equipped with reliable fittings and locks that ensure their safe use.



Smart Home

Intelligent control of doors, windows, roller shutters, façade blinds, mosquito nets, gates, wickets and lighting using a smartphone.



Official Partner of FC Bayern

ul. Leszka Gierszewskiego 1, 77-100 Bytów
+48 59 822 91 01

— **SINCE 1985** —

The information presented in this advertising material is for informational and illustrative purposes only. Product specifications should be subject to verification with the technical data specified by the manufacturer.



PVC TERRACE SYSTEMS

BORN OF PASSION AND
EXPERIENCE



BUSINESS PARTNER

IGLO EXPERT PSK NEW

A modern PVC tilt-and-slide patio door system that combines a slim design with high performance. The six-chamber profile, with a specially designed chamber geometry, together with a triple sealing system, provides excellent thermal insulation, enhanced comfort of use, and effective noise protection. The frame and sash combination, with a total height of only 117 mm, allows for a larger glazing area while bringing more natural light into the interior. The construction depth is 77 mm for the sash and 70 mm for the frame.

1,5 mm steel reinforcement

2 mm „c“-shaped steel reinforcement

non-flush profile








V-Perfect weld in standard

2 gaskets PVC-P

1 central gasket PVC-P

bottom and top rail cover available in 5 colors

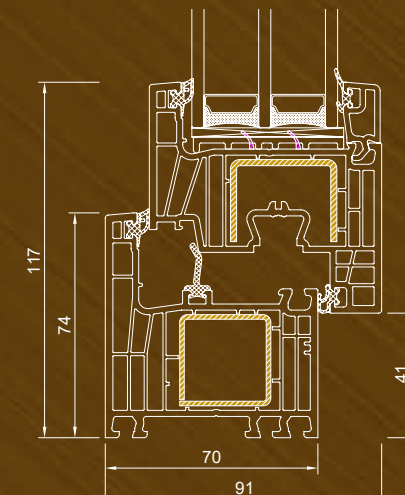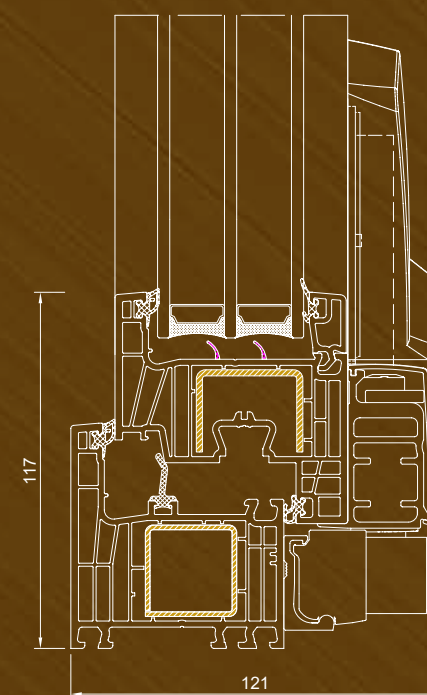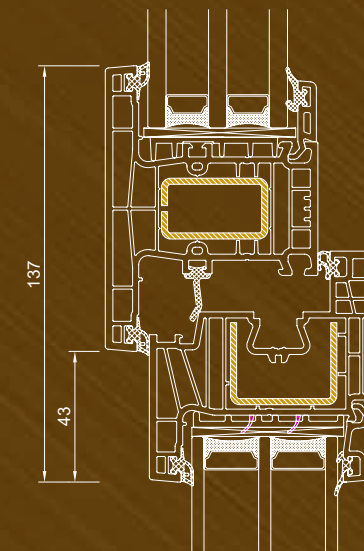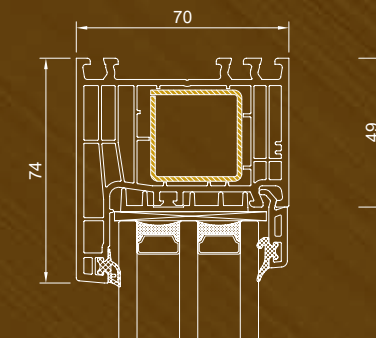

- 4 anti-burglary catches (where technically feasible)
- glazing with packages in the range of 24-54 mm
- argon-filled glazing unit
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- perimeter, glazing and central gaskets in black or grey color
- wide range of pvc veneer colors
- white, brown or anthracite profile
- gasket filling the lower fitting groove
- steel reinforcement of the frame and sash (2 mm for sash)
- optional full frame reinforcement

IGLO EXPERT PSK NEW

6
chambers

3
corner welded gaskets

77 / 70
sash / frame installation depth
/ mm /

0,69*
Uw for Ug=0,5 W/(m²K)

*value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit



IGLO ENERGY CLASSIC PSK

7-chamber class A profile, made exclusively of primary material.

Our proprietary system ensures optimal natural light levels for both large and small rooms, while maintaining exceptional thermal insulation properties, which will contribute to significantly lower your heating bills.

full steel
reinforcement

non-flush profile

2 mm „c“-shaped
steel reinforcement






V-Perfect weld in standard

2
gaskets
EPDM

1
central gasket
made out of foamed
EPDM

74 mm

bottom and top rail cover
available in 4 colors

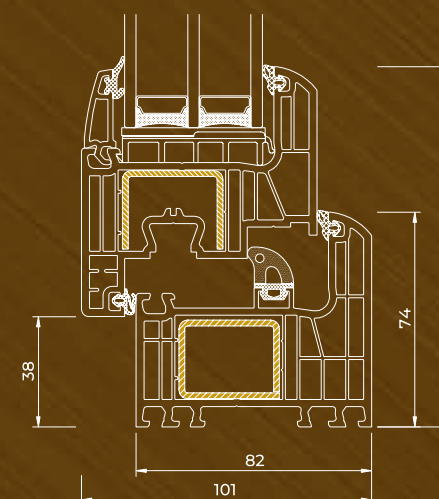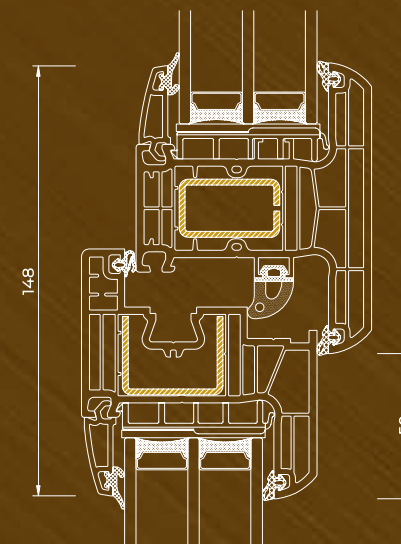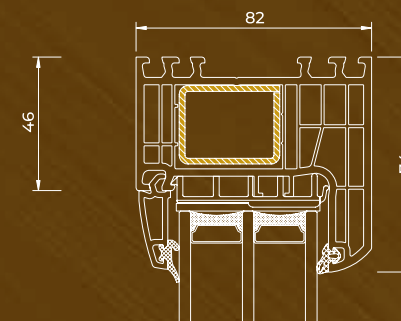

- MACO hardware designed for sashes exceeding the weight of 200kg
- argon-filled glazing unit
- glazing with units in the range of 24-52 mm
- galvanized steel spacer or Swisspacer Ultimate warm plastic edge
- can be tilted for ventilation
- aluminum handle
- peripheral, glazing and central gaskets made of EPDM in black or gray colors
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracit
- seal filling the lower fitting groove
- full steel reinforcement of the door frame
- 5-chamber PVC window sill strip with seal

IGLO ENERGY CLASSIC PSK

7
chambers

3
EPDM gaskets

82
installation depth
/ mm /

0,66*
Uw for Ug=0,5 W/(m²K)

* value calculated for a structure with dimensions
2700 x 2300 mm, 4th/18/4/18/4th

Class profile

A



IGLO EDGE SLIDE

The new terrace system with a high thermal insulation parameter of $U_w = 0.65 \text{ W}/(\text{m}^2\text{K})^*$ and a modern, angular profile shape consistent with the Iglo Edge product line.

2 mm steel
reinforcement






61 mm

3
EPDM gaskets



V-Perfect weld
as standard

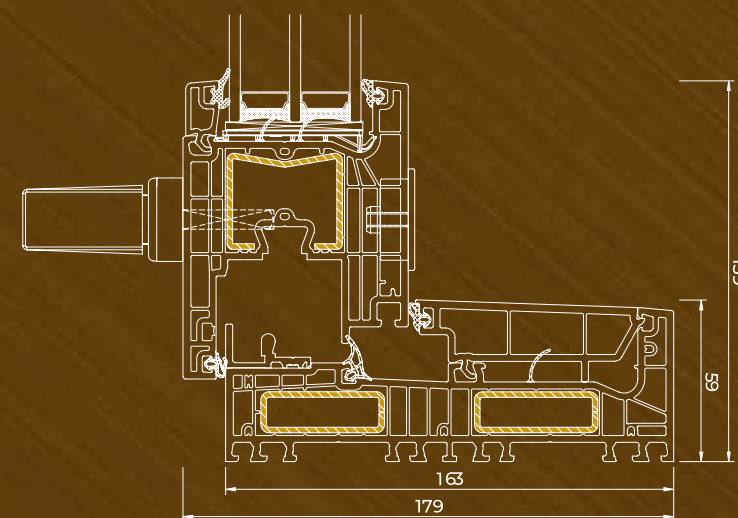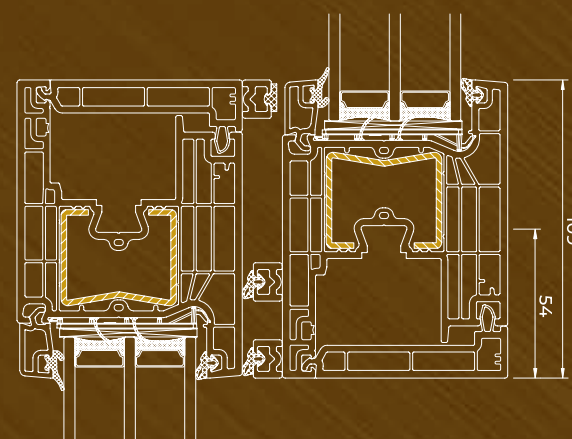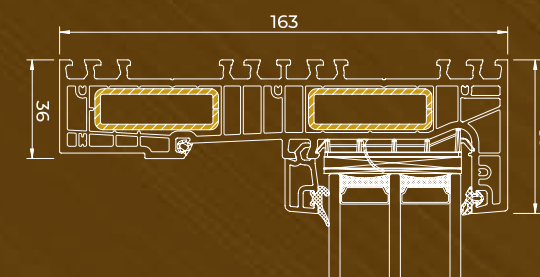

- SIEGENIA hardware with anti-burglary catches
- argon-filled glazing unit
- glazing with units in the range of 48-54 mm
- Swisspacer Ultimate warm plastic edge
- internal aluminum handle
- micro-ventilation
- external aluminum pull
- peripheral and glazing seals made of EPDM in black or gray
- black central gasket
- wide range of PVC veneer colors
- 3 colors of the door sash profile to choose from: white, brown or anthracite
- 2 mm steel reinforced sash and frame
- 5-chamber PVC window sill strip with a gasket

IGLO EDGE SLIDE

6
chambers

3
EPDM gaskets

163
installation depth
/ mm /

0,65*
 U_w for $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$

*value calculated for a structure with dimensions
4000 × 2600 mm, 4th/18/4/18/4th

Class profile



A



IGLO HS

An ideal solution for creating fashionable terraces with large glazed surfaces, which gives the interior a unique character.

Thanks to the extremely durable construction, this terrace system can be used with sashes weighing up to 400 kg. Perfect functionality is ensured by, among others: the use of a low aluminum threshold that can be hidden in the floor.

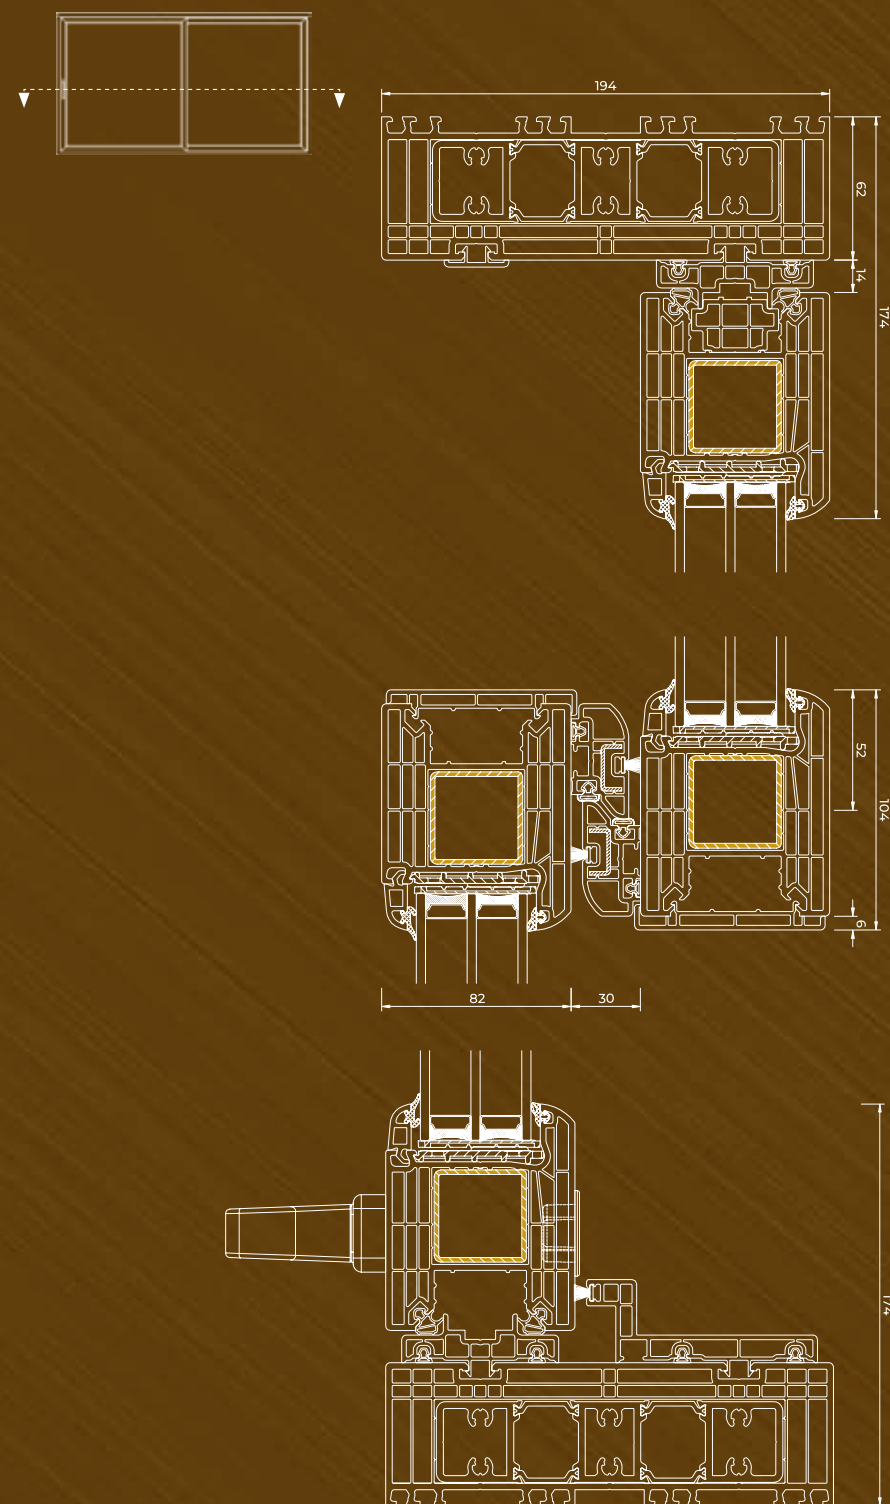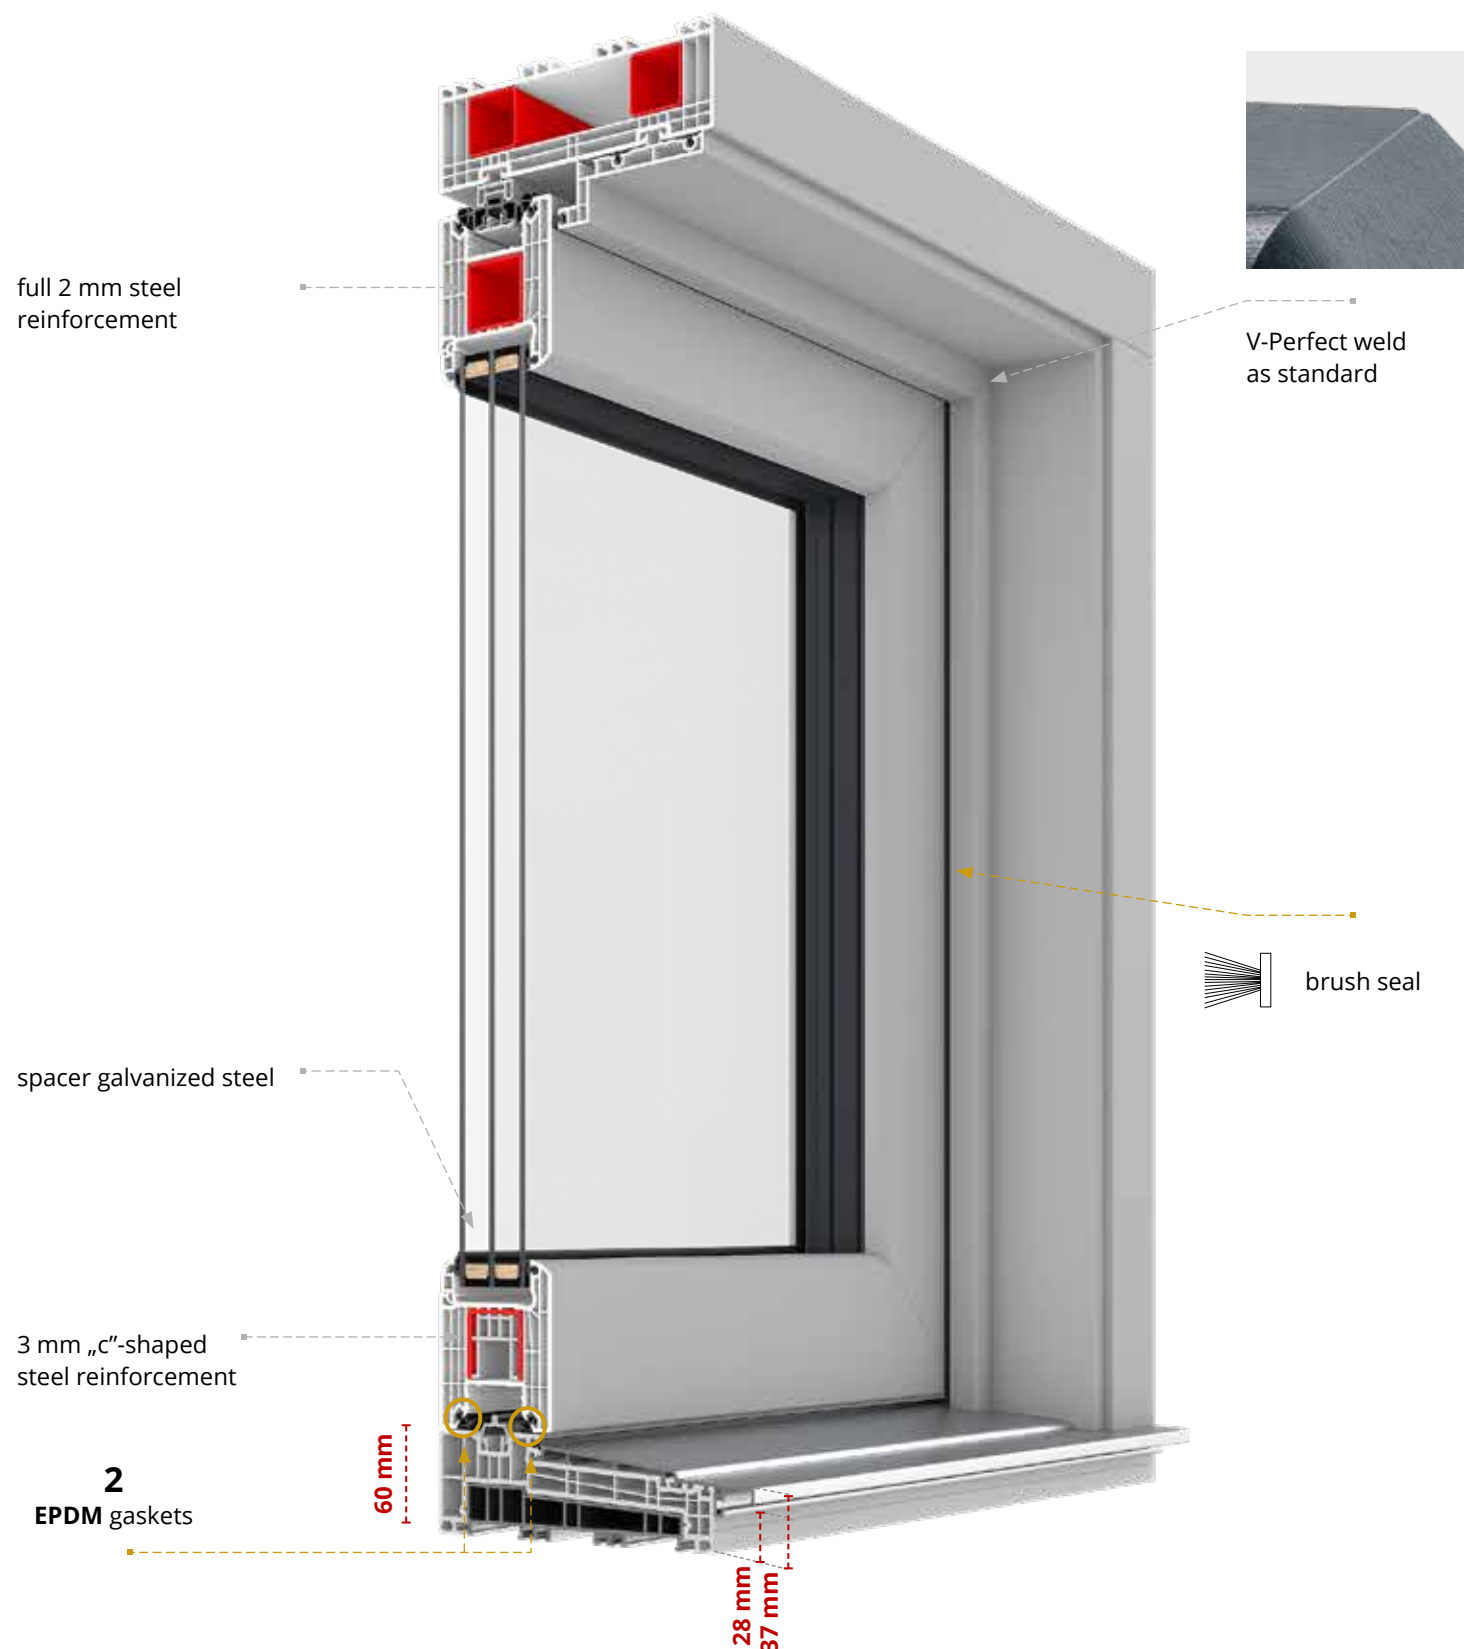

- G-U lift and slide fittings, equipped with 3 locking bolts
- argon-filled glazing unit
- glazing with units in the range of 36-52 mm
- micro-ventilation hook
- aluminum handle inside, pull handle on the outside
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- internal velour seal, external EPDM gasket and black brush seal
- sash reinforcement: upper and vertical – full steel reinforcement, 2 mm thick; lower – steel channel-shaped reinforcement, 3 mm thick
- white profile core
- low PVC threshold with reinforcement and aluminum cover

IGLO HS

7
chambers

2
EPDM gaskets

194
installation depth
/ mm /

0,71*
Uw for Ug=0,5 W/(m²K)

*value calculated for a structure with dimensions
4000 × 2600 mm, 4th/18/4/18/4th









Class profile

A



FOIL COLORS SAMPLE

The printout may differ from reality.

					
Concrete grey 702305-167	Basalt grey smooth 701205-097	Crown Platinum 9.1293001-195	Cream 137905-167	Quartzite grey 703905-167	Dark red 308105-167
					
Light grey 725105-167	Anthracite Ulti-Matt 02.20.71.00001-504700	Quartz grey smooth 703905-097	Natural oak 3118076-167	Oregon 2115008-167	Palisander 851805-167
					
Slate 1.0065002-097	Slate grey smooth 02.11.71.000040-097	Black Ulti-Matt 02.20.01.000002-504700	Grey 715505-167	Smooth anthracite 701605-097	Golden oak 2178001-167
					
Pyrite 02.12.17.000001	Jet Black CC+ 476-6062	Dark green 612505-167	Turner oak F470-3001	Moss green 600505-167	FX white 915205-168
					
Anthracite 701605-167	Chocolate brown 887505-167	Douglas fir 3152009-167	Dark oak 2052089-167	Macore 3162002-167	Mahogany 2097013-167
					
Basalt grey 70125-097	Nut 2178007-167	Sheffield oak light F 456-3081	Winchester 49240015-148	White sand Ulti-Matt PX 9152	Deep bronze F4701029
					
Sandblasted graphite MAT 436-6023	Turner oak toffee 470-3004	Turner oak walnut 470- 9036	Brilliant Blue 470- 9036	Steel Blue 470- 9036	

WARM EDGE
SWISSPACER
ULTIMATE
without surcharge

	
White RAL 9016	Light grey RAL 7035
	
Grey RAL 9023	Light brown RAL 8003
	
Dark brown RAL 8014	Black RAL 9005

More details
you will find in
our catalogue






Information

IGLO EXPERT PSK



IGLO ENERGY
CLASSIC PSK



IGLO EDGE SLIDE



IGLO-HS

Number of chambers	6	7	6	7
Construction depth	70 mm	82 mm	163 mm	194 mm
Number of seals	3	3	3	2
Thermal transmittance	Uw = 0,69 W/(m²K)* * value calculated for a structure with dimensions 2700 x 2300 mm, 4th/18/4/18/4th	Uw = 0,66 W/(m²K)* * value calculated for a structure with dimensions 2700 x 2300 mm, 4th/18/4/18/4th	Uw = 0,65 W/(m²K)* * value calculated for a structure with dimensions 4000 x 2600 mm, 4th/18/4/18/4th	Uw = 0,71 W/(m²K)* * value calculated for a structure with dimensions 4000 x 2600 mm, 4th/18/4/18/4th
Glazing package	24-54 mm	24-48 mm	48-54 mm	36-52 mm



Discover our full range.




up to 7000
windows daily


4000
employees


650
vehicles


118 Tsd. m²
surface production

SINCE 1985

FAST DELIVERY - FROM 7 DAYS

