



Quality

The latest technology, the best materials and production controlled at every stage as well as our own research laboratories guarantee the highest quality.



Service

Professional and fast service is the hallmark of Drutex, which has been setting trends in pre- and post-sales customer service for years.



Security

Doors are equipped with reliable fittings and locks that ensure their safe use.



Smart Home

Intelligent control of doors, windows, roller shutters, façade blinds, mosquito nets, gates, wickets and lighting using a smartphone.



ul. Lęborska 31, 77-100 Bytów
+48 59 822 91 01

SINCE 1985

The information presented in this advertising material is for informational and illustrative purposes only. Product specifications should be subject to verification with the technical data specified by the manufacturer.



BUSINESS PARTNER





PVC TERRACE SYSTEMS

BORN OF PASSION AND EXPERIENCE

IGLO ENERGY CLASSIC PSK

7-chamber class A profile, made exclusively of primary material. Our proprietary system ensures optimal natural light levels for both large and small rooms, while maintaining exceptional thermal insulation properties, which will contribute to significantly lower your heating bills.

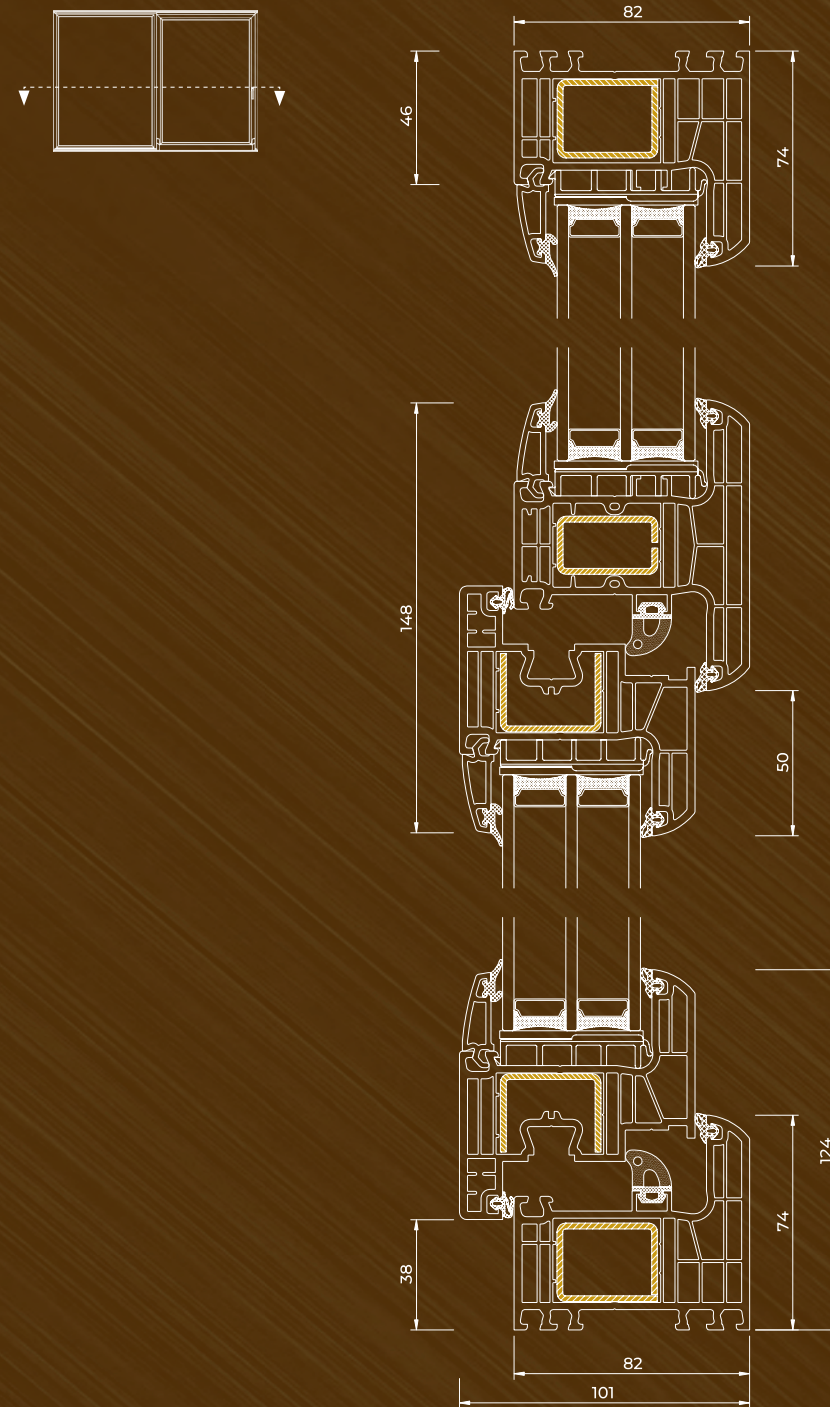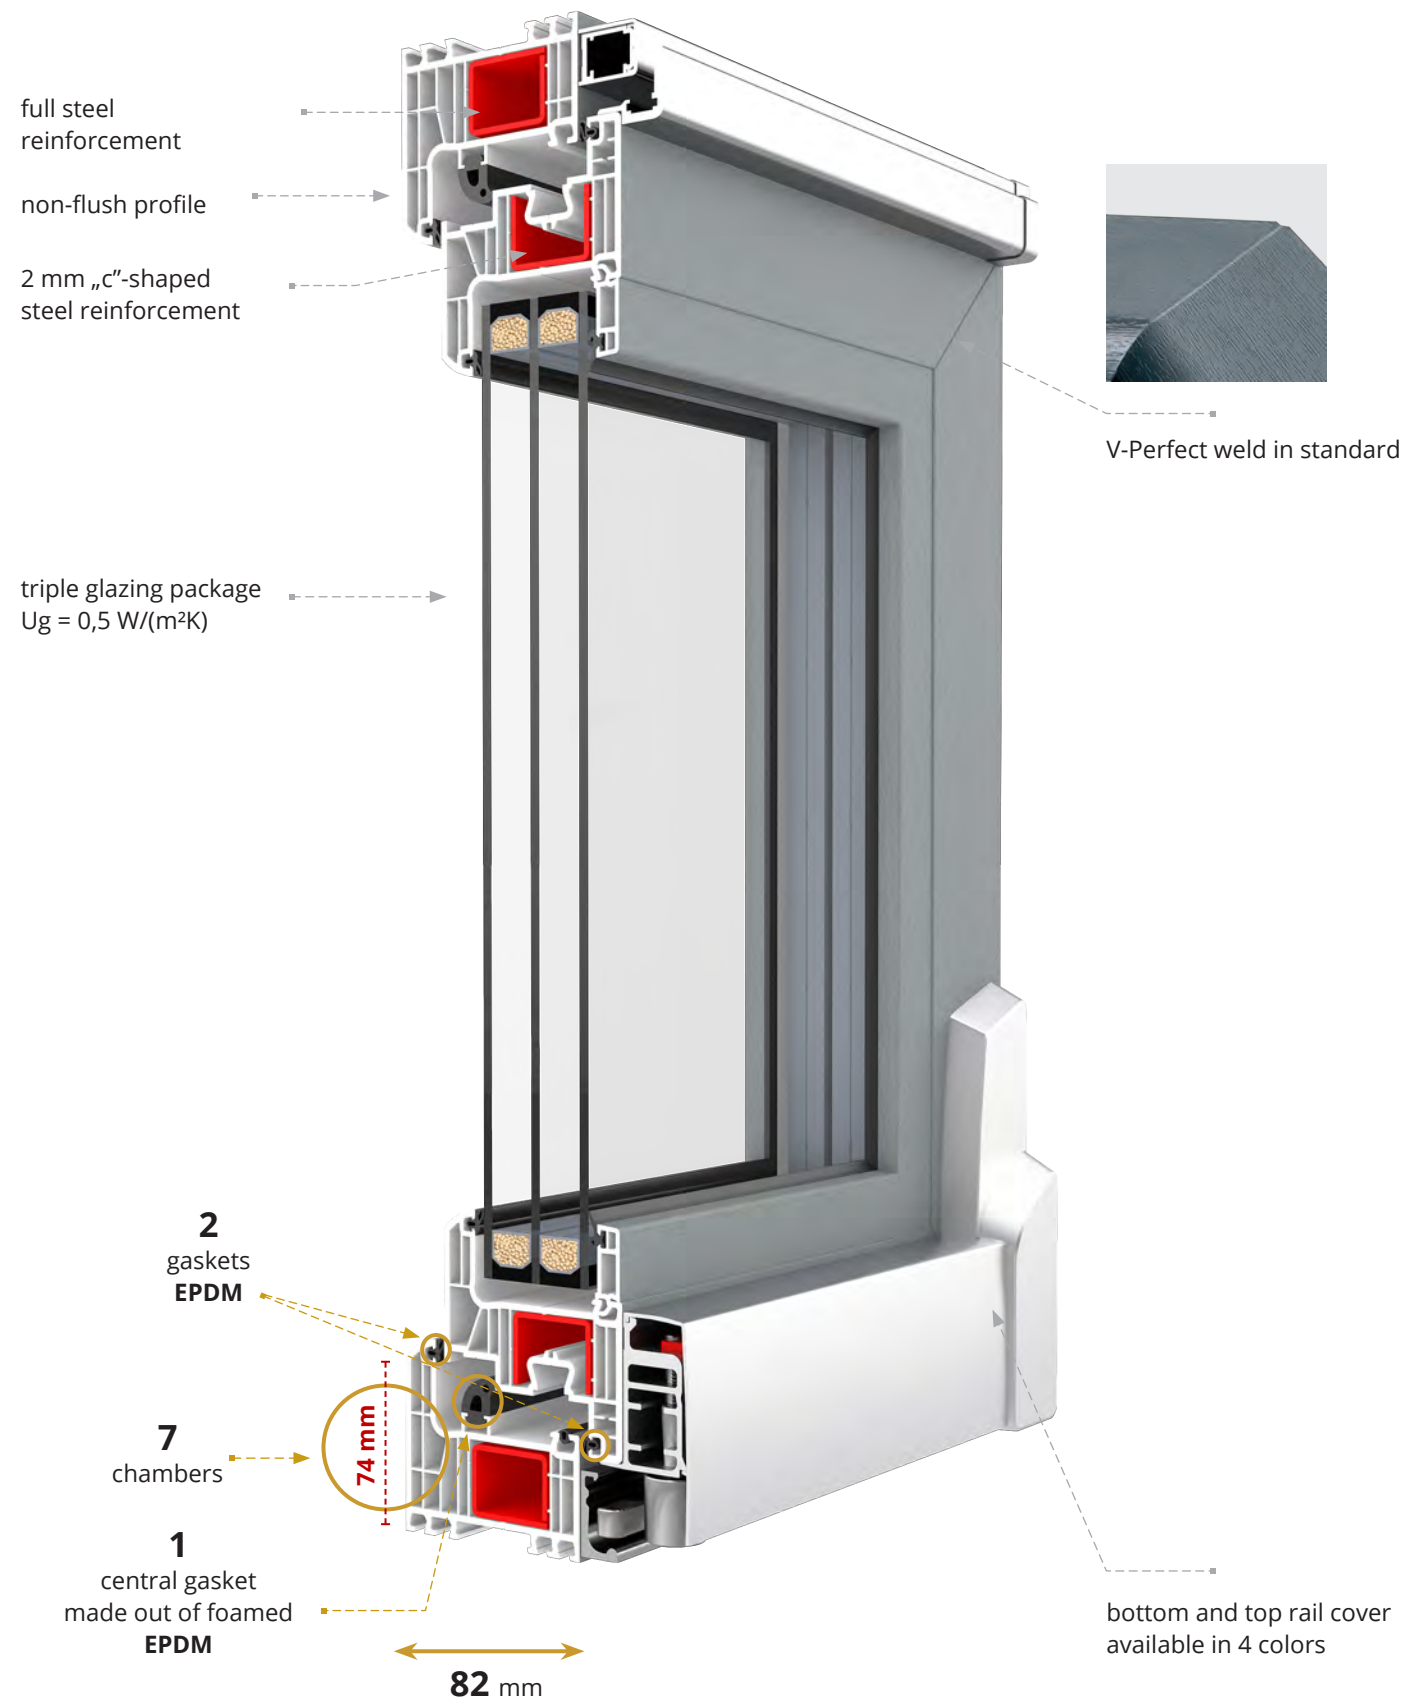

- MACO hardware designed for sashes exceeding the weight of 200kg
- 2-chamber glazing unit filled with Argon gas with Ug=0.5 W/(m²K)
- glazing packages available: 24-52 mm (48 mm - 4/18/4/18/4 by default)
- galvanized steel spacer or Swisspacer Ultimate warm plastic edge
- can be tilted for ventilation
- aluminum handle
- peripheral, glazing and central gaskets made of EPDM in black or gray colors
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracit
- seal filling the lower fitting groove
- full steel reinforcement of the door frame
- 5-chamber PVC window sill strip with seal
- V-Perfect weld as standard

IGLO ENERGY CLASSIC PSK

7
chambers

3
EPDM gaskets

82
installation depth
/ mm /

0,66*
Uw for Ug=0,5 W/(m²K)

*value determined by the calculation method for structure with dimensions of 2700 x 2300 mm with glass of Ug value=0.5 W/(m²K) and Swisspacer Ultimate frame



Class profile

A



IGLO EDGE SLIDE

The new terrace system with a high thermal insulation parameter of $U_w = 0.65 \text{ W}/(\text{m}^2\text{K})^*$ and a modern, angular profile shape consistent with the Iglo Edge product line.

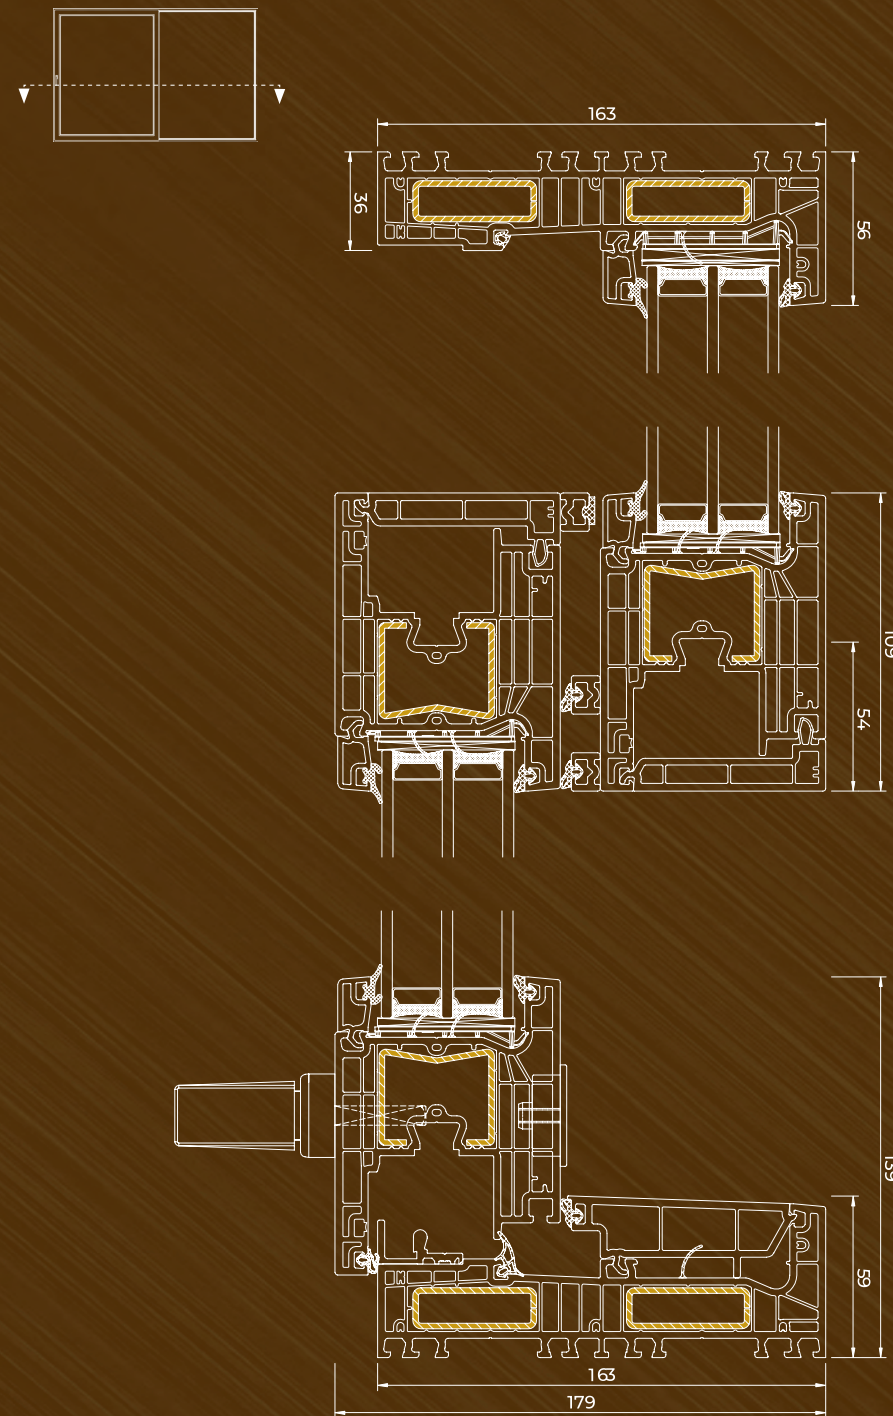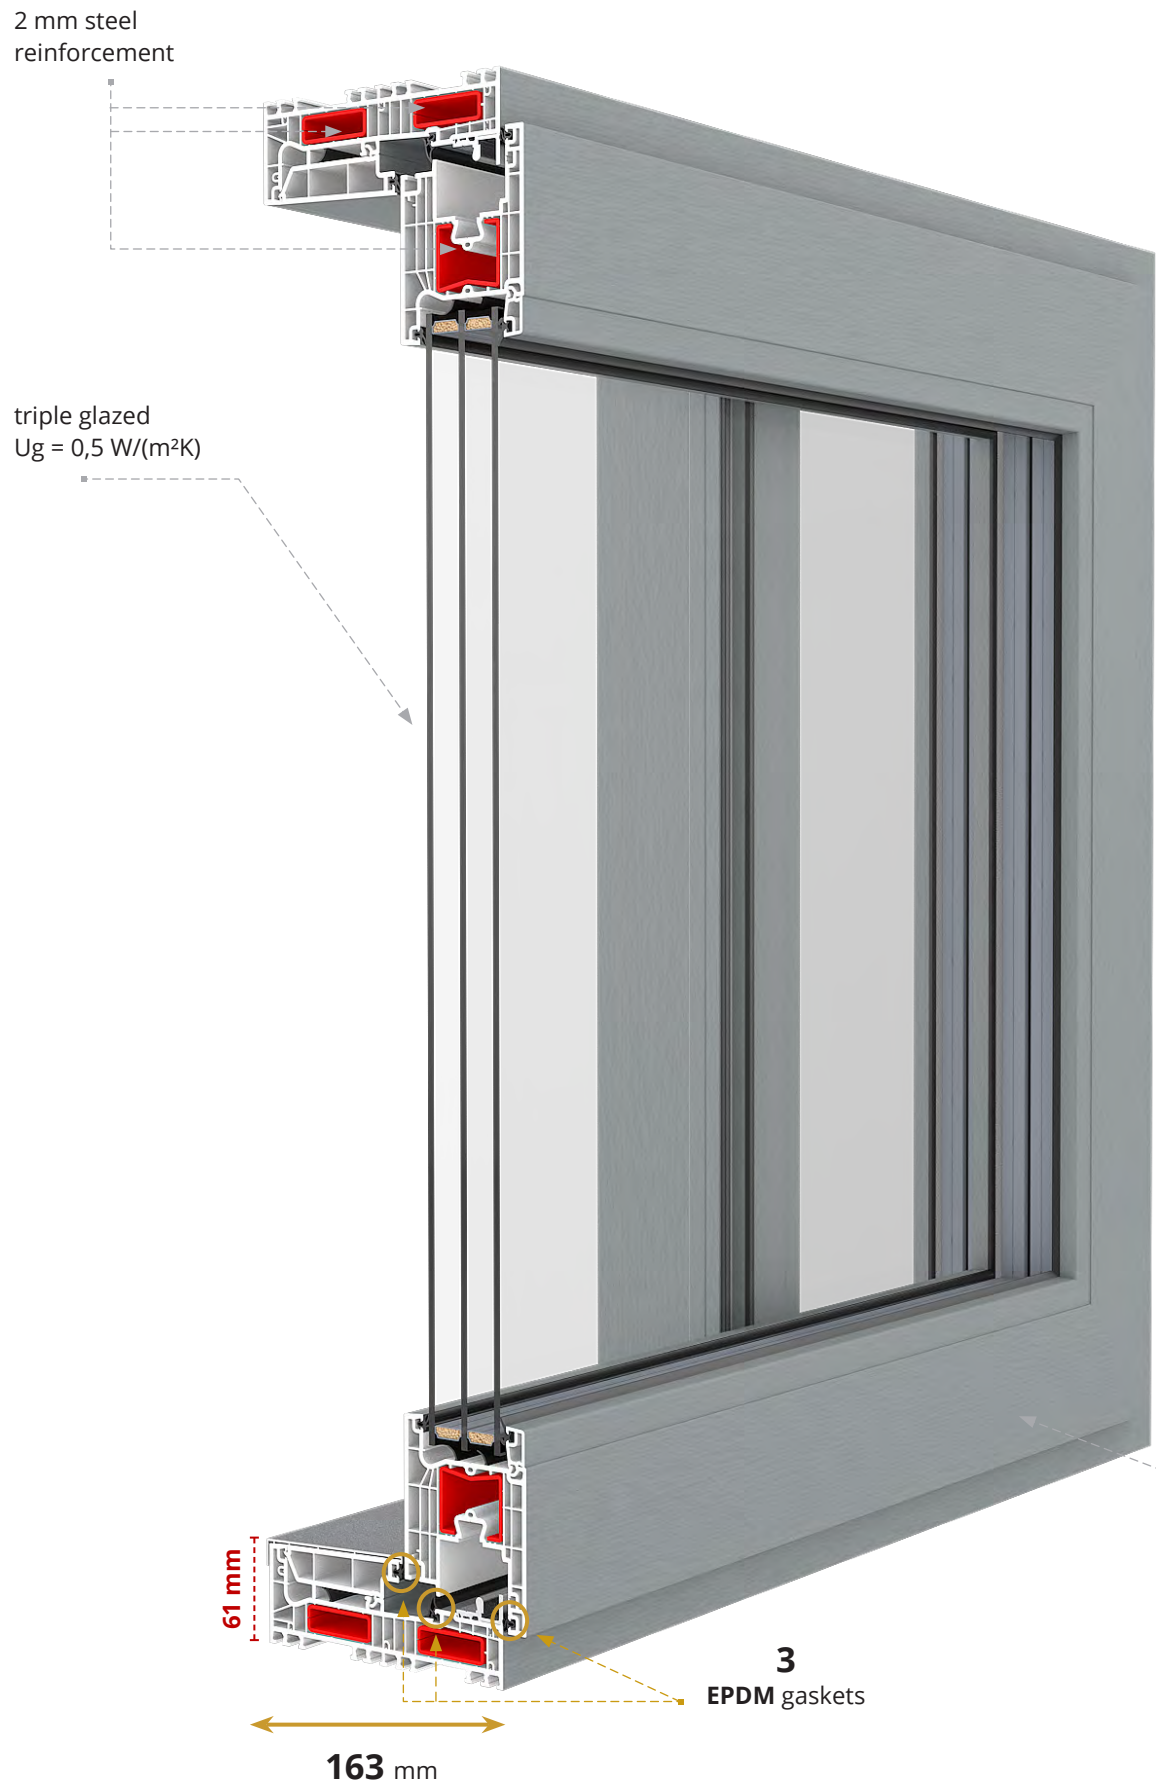

- SIEGENIA hardware with anti-burglary catches
- 2-chamber glazing unit filled with Argon gas with $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$
- glazing packages available: 48-54 mm (48 mm - 4/18/4/18/4 by default)
- Swisspacer Ultimate warm plastic edge
- internal aluminum handle
- micro-ventilation
- external aluminum pull
- peripheral and glazing seals made of EPDM in black or gray
- black central gasket
- wide range of PVC veneer colors
- 3 colors of the door sash profile to choose from: white, brown or anthracite
- 2 mm steel reinforced sash and frame
- 5-chamber PVC window sill strip with a gasket
- V-Perfect weld as standard

IGLO EDGE SLIDE

6
chambers

3
EPDM gaskets

163
installation depth
/ mm /

0,65*
 U_w for $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$

* value determined by the calculation method for structure with dimensions of 4000 x 2600 mm with glass of U_g value=0.5 $\text{W}/(\text{m}^2\text{K})$ and Swisspacer Ultimate frame

Class profile



A



IGLO HS

An ideal solution for creating fashionable terraces with large glazed surfaces, which gives the interior a unique character.

Thanks to the extremely durable construction, this terrace system can be used with sashes weighing up to 400 kg. Perfect functionality is ensured by, among others: the use of a low aluminum threshold that can be hidden in the floor.

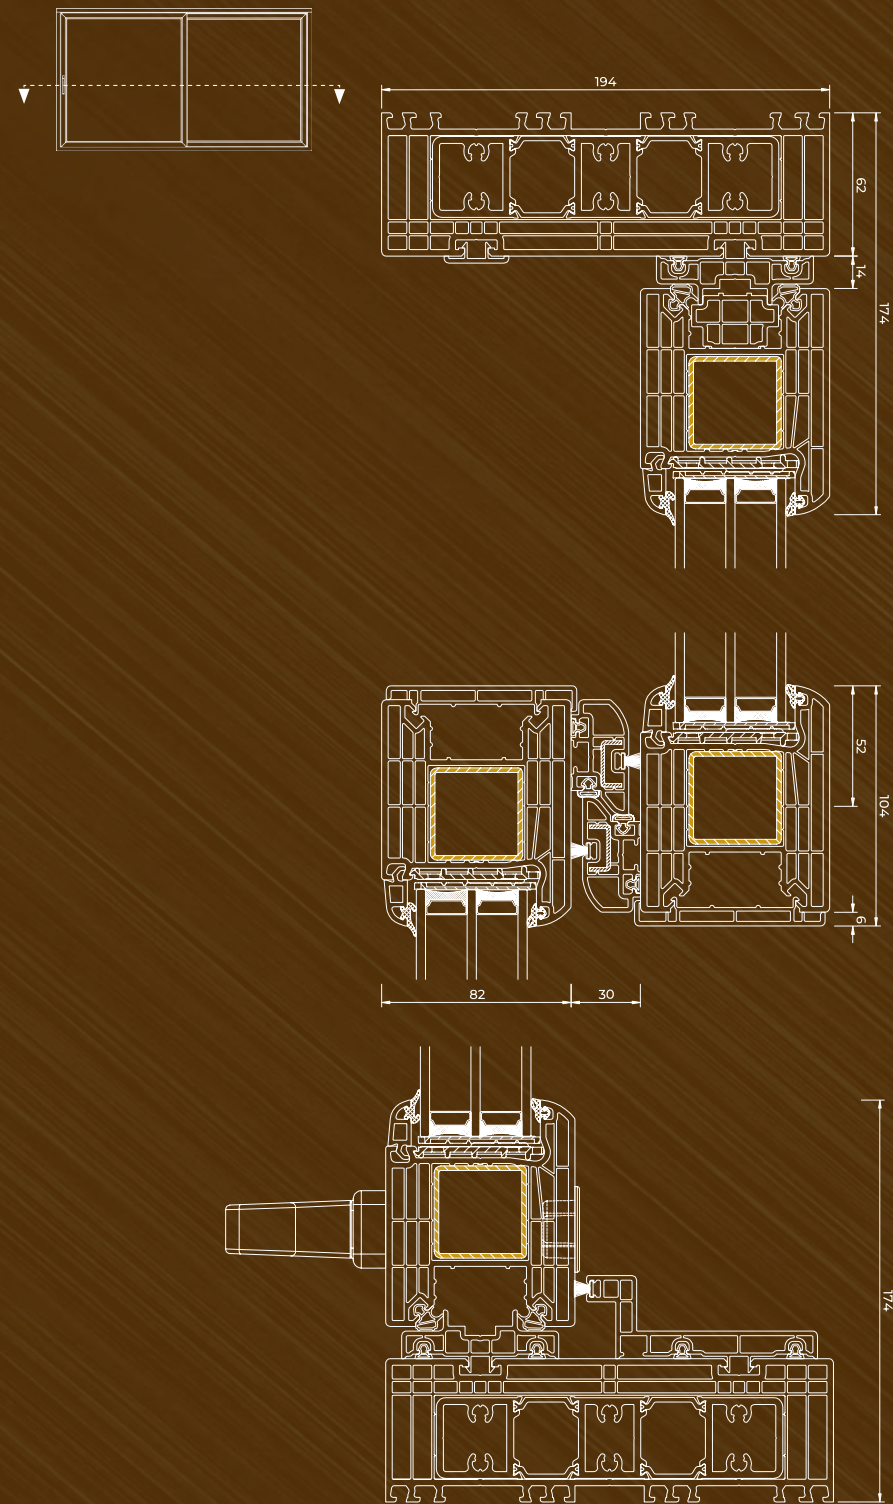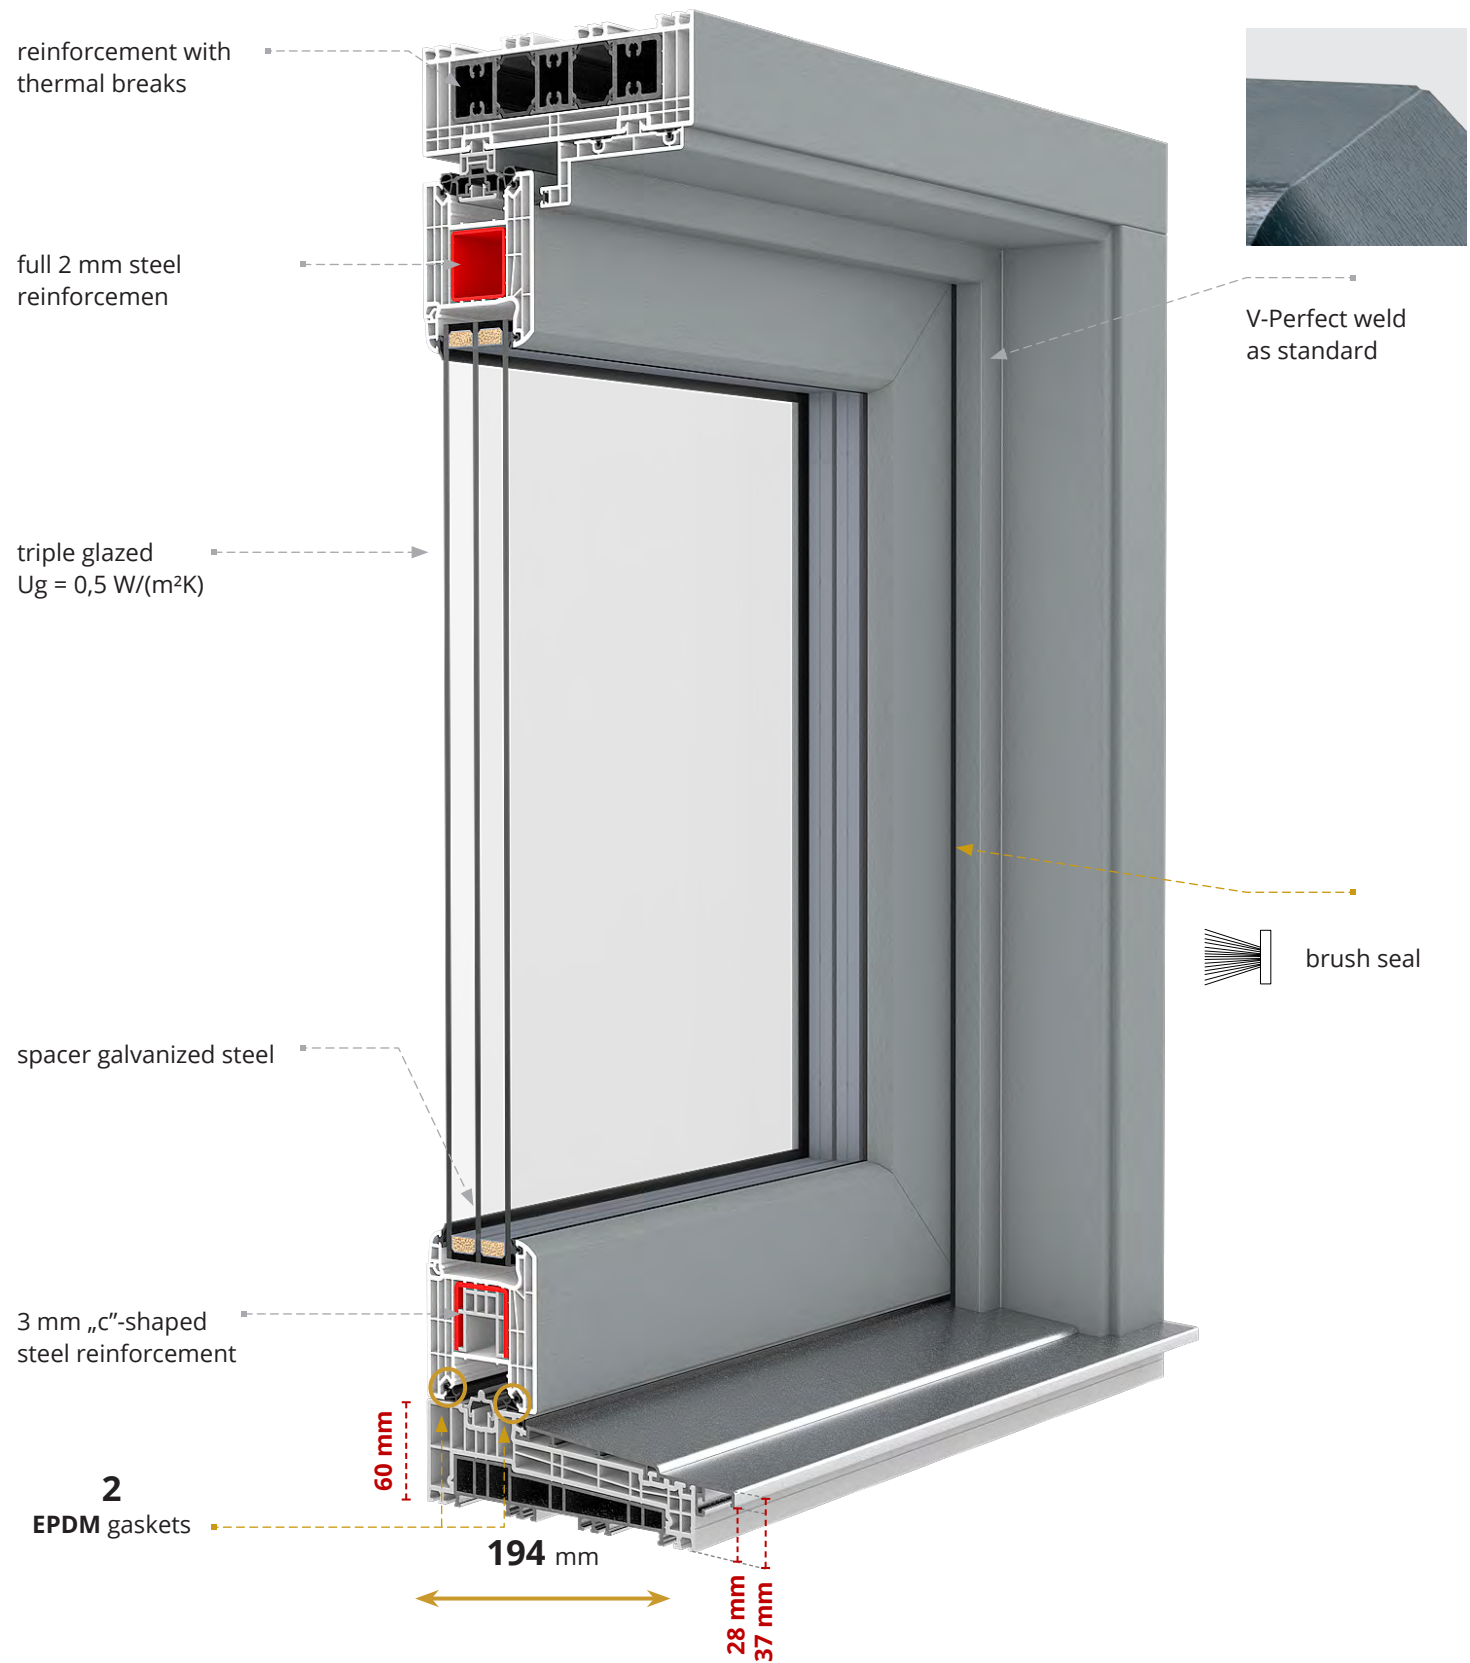

- G-U lift and slide fittings, equipped with 3 locking bolts
- 2-chamber glazing unit filled with Argon gas with $U_g=0,5\text{W}/(\text{m}^2\text{K})$
- glazing packages available: 36-52 mm (48mm - 4/18/4/18/4 by default)
- micro-ventilation hook
- V-perfect weld
- aluminum handle inside, pull handle on the outside
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- internal velour seal, external EPDM gasket and black brush seal
- frame reinforcement made of high-quality aluminum profiles with thermal breaks, sash reinforcement: upper and vertical - solid (2 mm of rectangular tube steel reinforcement, lower - 3mm channel reinforcement)
- white profile core
- low PVC threshold with reinforcement and aluminum cover

IGLO HS

7
chambers

2
EPDM gaskets

194
installation depth
/ mm /

0,71*
 U_w for $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$

* value determined by the calculation method for structure with dimensions of 4000 x 2600 mm with glass of U_g value=0.5 $\text{W}/(\text{m}^2\text{K})$ and Swisspacer Ultimate frame




































Class profile

A



VENEER colors

The rich color palette of window systems allows for almost unlimited possibilities of matching the color to the personal needs and preferences of customers. The excellent quality of the veneers used during production guarantees the highest quality and durability of the color for many years.

					
Concrete grey 702305-167	Basalt grey smooth 701205-097	Crown Platinum 9.1293001-195	Cream 137905-167	Quartzite grey 703905-167	Dark red 308105-167
					
Light grey 725105-167	Anthracite Ulti-Matt 02.20.71.000001-504700	Quartz grey smooth 703905-097	Natural oak 3118076-167	Oregon 2115008-167	Palisander 851805-167
					
Slate 1.0065002-097	Slate grey smooth 02.11.71.000040-097	Black Ulti-Matt 02.20.01.000002-504700	Grey 715505-167	Smooth anthracite 701605-097	Golden oak 2178001-167
					
Pyrite 02.12.17.000001	Jet Black CC+ 476-6062	Dark green 612505-167	Turner oak F470-3001	Moss green 600505-167	FX white 915205-168
					
Anthracite 701605-167	Chocolate brown 887505-167	Douglas fir 3152009-167	Dark oak 2052089-167	Macore 3162002-167	Mahogany 2097013-167
					
Basalt grey 70125-097	Nut 2178007-167	Sheffield oak light F 456-3081	Winchester 49240015-148	White sand Ulti-Matt PX 9152	

The printout may differ from reality.

WARM EDGE

**SWISSPACER
ULTIMATE**
without surcharge



White
RAL 9016

Light grey
RAL 7035



Grey
RAL 9023

Light brown
RAL 8003



Dark brown
RAL 8014

Black
RAL 9005

More details
you will find in
our catalogue





WINDOWS



**ROLLER SHUTTERS,
VENETIAN BLINDS**



DOORS



**FACADE,
WINTER GARDENS**



up to **7000**
windows daily



4000
employees



650
vehicles



118 Tsd. m²
surface production

SINCE 1985

FAST DELIVERY TIME

