


Doors » Aluminum Doors » MB-78EI Fire-Doors

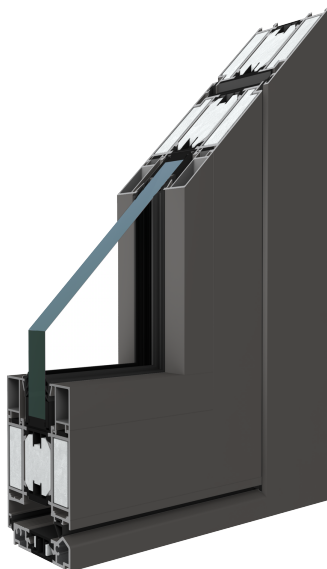

**MB-78EI doors**

Great fire and smoke insulation that guarantees high structure durability and resistance.

Features

1. Good parameters of thermal insulation.
2. High level of acoustic insulation.
3. Fire proof class from EI15 to EI60.
4. Low heat transmittance coefficient as a result of application i.a. specially profiled thermal separators with 34 mm width.
5. Durable and solid structure thanks to the stable aluminum profile.
6. Lots of possibilities to customize the interior and exterior design with great selection of colors.

**Technical data**

Profile	The MB-78EI system structure is based on insulated thermal aluminum profiles with depth 78mm.
Glass	Standard fireproof glass, and multilayered opaque elements consisting of metal sheets and proper panels which ensure the required fire protection.
Colour range	According to the RAL color range and wood-grain coating from Aluprof ColorCollection
Spacer frame	Steel galvanized spacer frame in standard.
Fittings	Fittings that fulfill the fire regulations.
Gaskets	Specially expanding and ceramic seals that prevent the spread of fire and smoke.