



DRUTEX
WINDOWS DOORS SHUTTERS GATES



Quality

The latest technology, the best materials, production control at every stage and our own research laboratories guarantee the highest quality.



Safety

The windows are equipped with reliable hardware and locks that enhance safety in use.



Service

Professional and fast service is a hallmark of Drutex, which has been setting trends in pre-sales and after-sales customer service for years.



Smart Home

Smart control of doors, windows, roller shutters, external venetian blinds, insect screens, gates, wickets and lighting via smartphone.

DRUTEX
WINDOWS DOORS SHUTTERS GATES



Official Partner of FC Bayern

ul. Leszka Gierszewskiego 1, 77-100 Bytów
+48 59 822 91 01



— SINCE 1985 —

The information presented in this advertising material is for informational and illustrative purposes only. The product specification should be verified against the technical data specified by the manufacturer.


ROLLER SHUTTERS AND EXTERNAL VENETIAN BLINDS

MINIMALISM, COMFORT AND
PROTECTION


RN 215 | TOP-MOUNTED PVC ROLLER SHUTTER

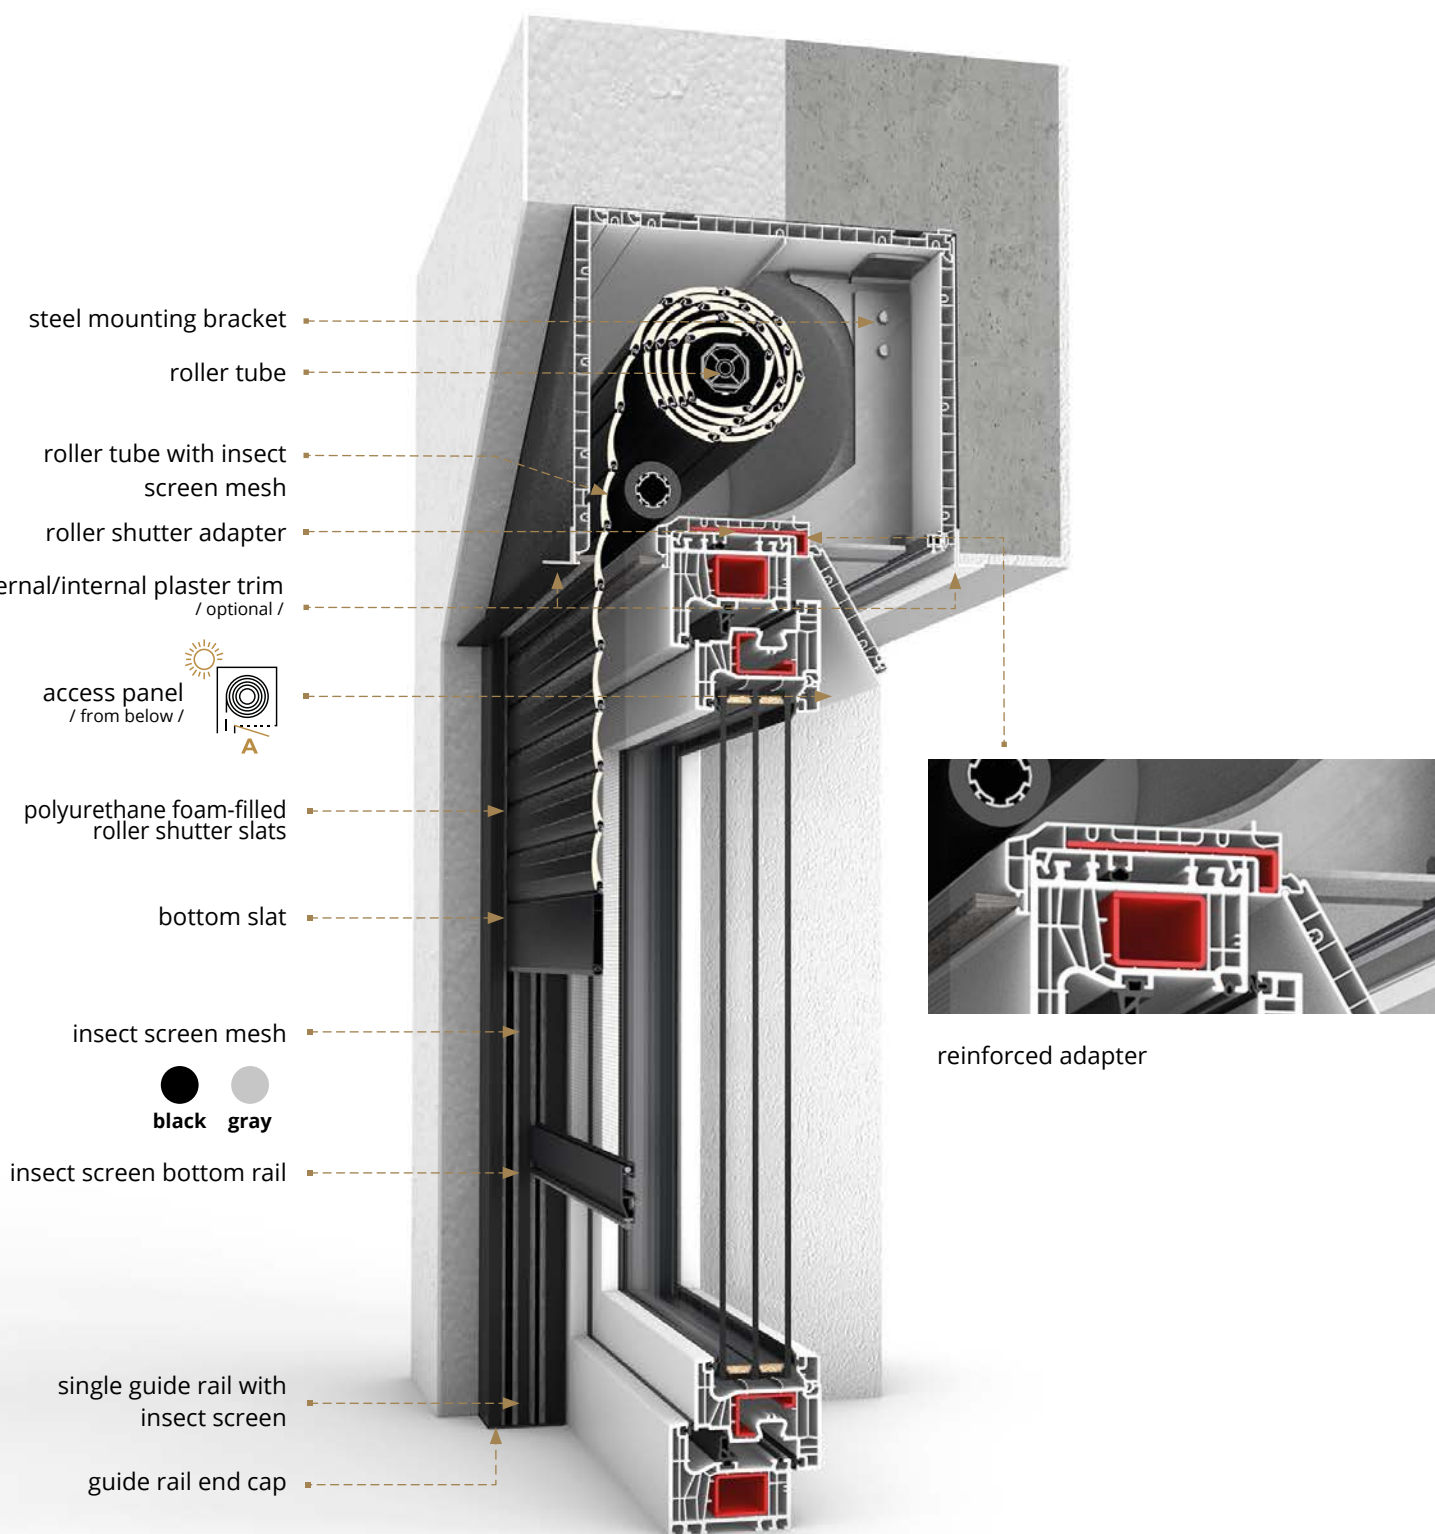

single guide rail

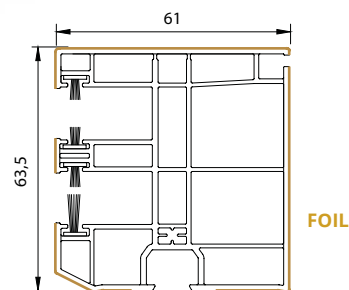

single guide rail with insect screen

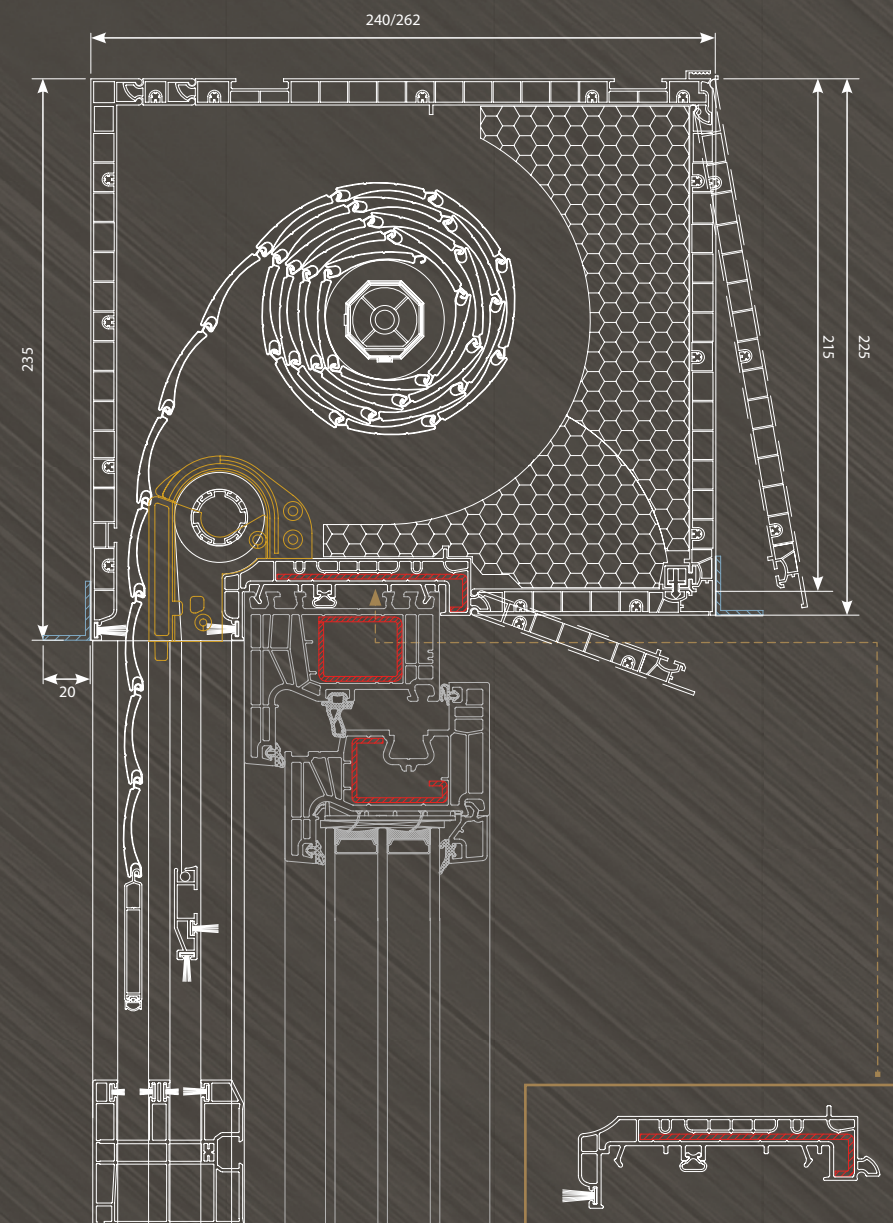

- headbox depth: 240 mm, with insect screen: 262 mm
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- two-piece static bracket from width 1800 mm allows for achieving optimal structural rigidity
- The adapter is fitted with a seal ensuring optimum tightness and excellent thermal insulation and air permeability performance.
- PVC, aluminum or wooden guide rails
- a specially designed reinforcement ensures optimal system rigidity and wind resistance.
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter
- bottom rail with concealed stopper or buffer
- roller or pleated insect screen
- possibility of mounting the roller shutter to the window
- standard 5° angled bottom guide rail end cap
- 55 mm extruded bottom slat

* for box with MKT and 37 mm and 42 mm slats
** in combination with Iglo Energy

RN 215



215
installation height
/ mm /




240 / 262*
installation depth
/ mm /


0,78**
U_{sb}



37mm | 42mm | 55mm

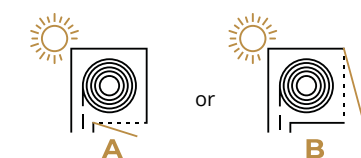

from the bottom or front side
inspection access





guide rail materials

Iglo 5, Iglo Light, Iglo Energy, Iglo Edge


compatible systems




RN 225 | TOP-MOUNTED PVC ROLLER SHUTTER

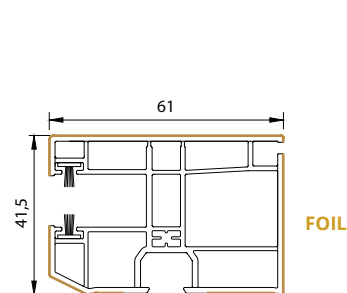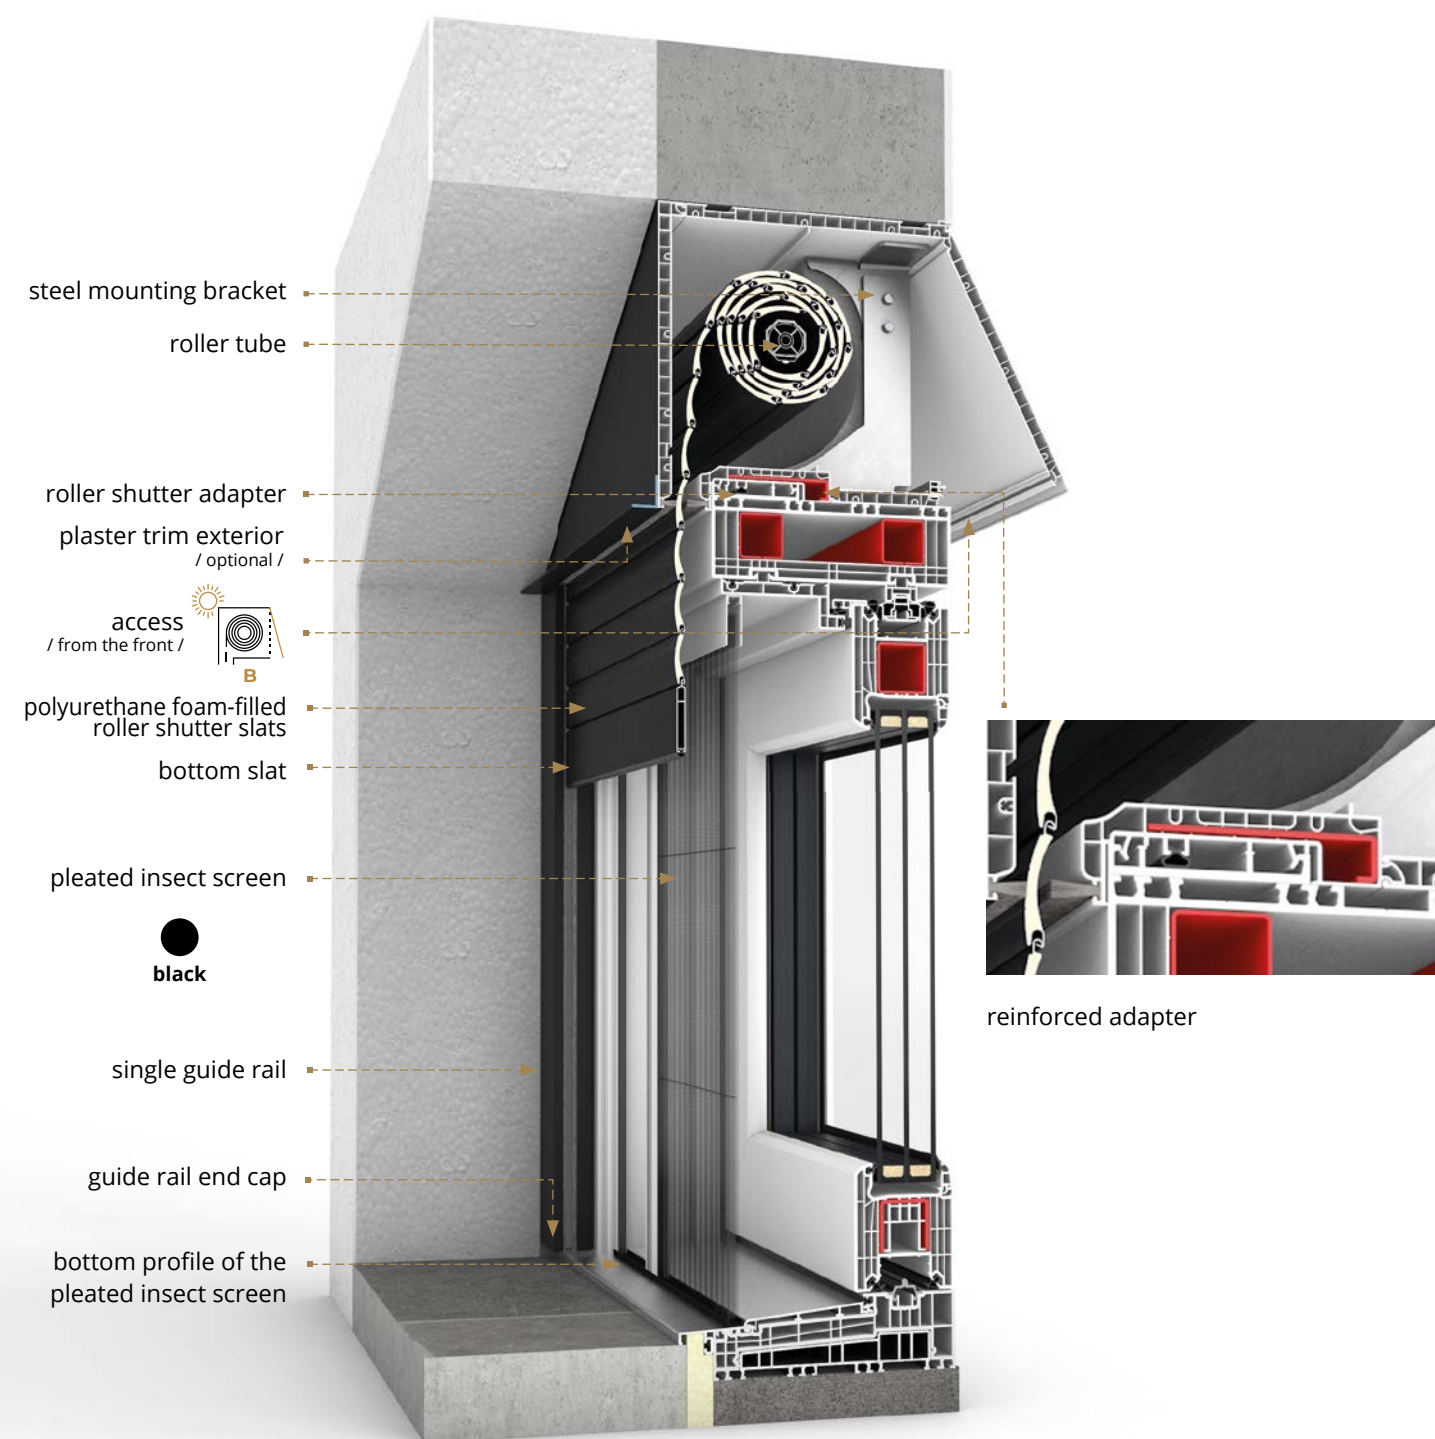

single guide rail

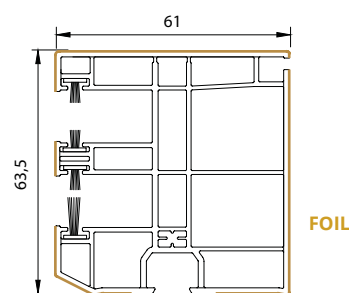

single guide rail with insect screen

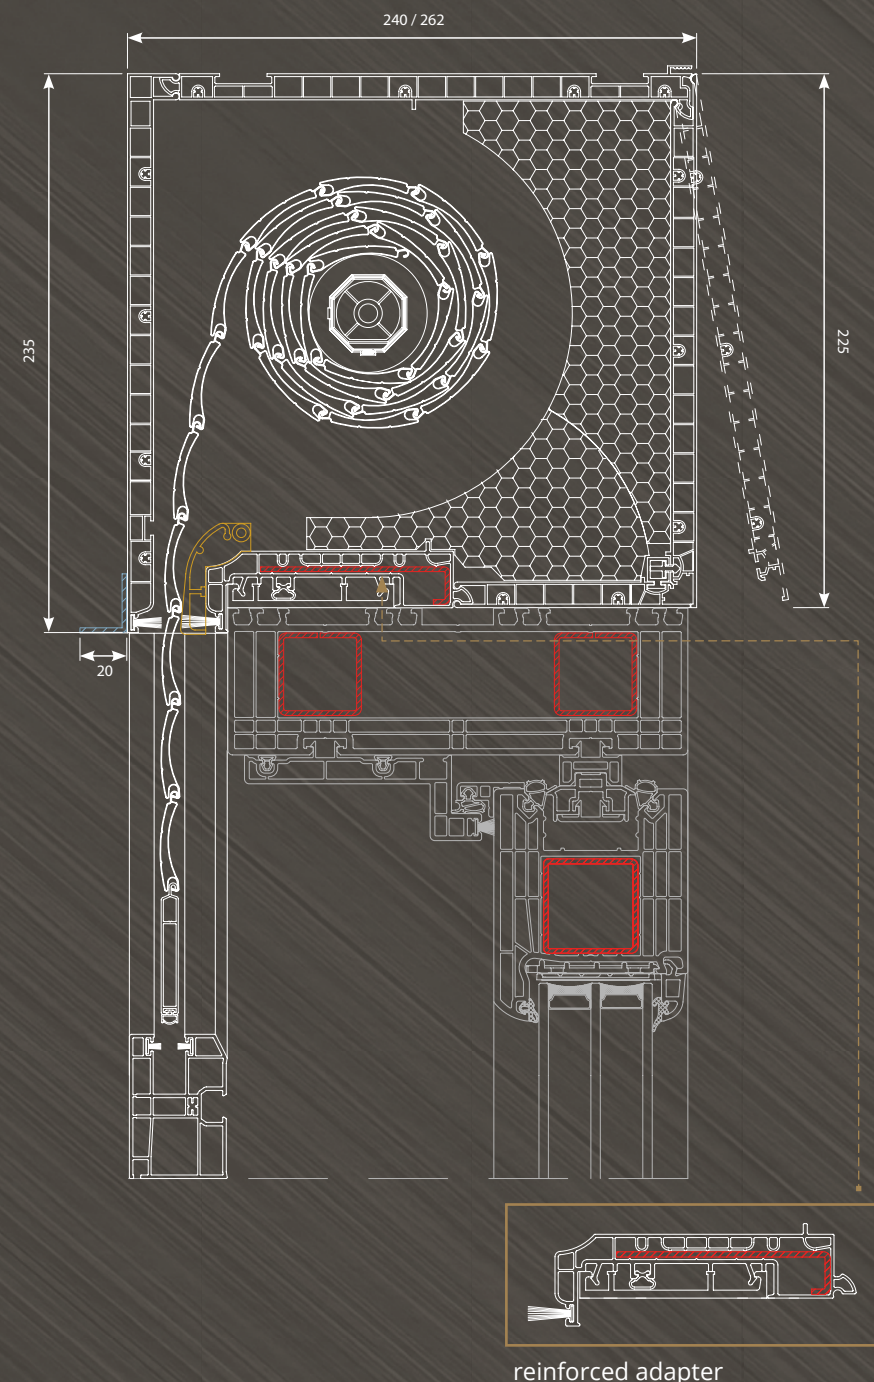

- headbox depth: 240 mm, with insect screen: 262 mm
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- two-piece static bracket from width 1800 mm allows for achieving optimal structural rigidity
- PVC, aluminum or wooden guide rails
- a specially designed reinforcement ensures optimal system rigidity and wind resistance.
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter
- bottom rail with concealed stopper or buffer
- roller or pleated insect screen
- possibility of mounting the roller shutter to the window
- standard 5° angled bottom guide rail end cap
- 55 mm extruded bottom slat

* for box with MKT and 37 mm and 42 mm slats
** in combination with an aluminum window

RN 225



225
installation height
/ mm /




240 / 262*
installation depth
/ mm /


0,83**
U_{sb}



37mm | 42mm | 55mm

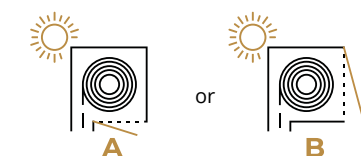

from the bottom or front side
inspection access







guide rail materials

PVC, aluminum, wood
max. window frame width: 195 mm

compatible systems



RN 175 | TOP-MOUNTED PVC ROLLER SHUTTER

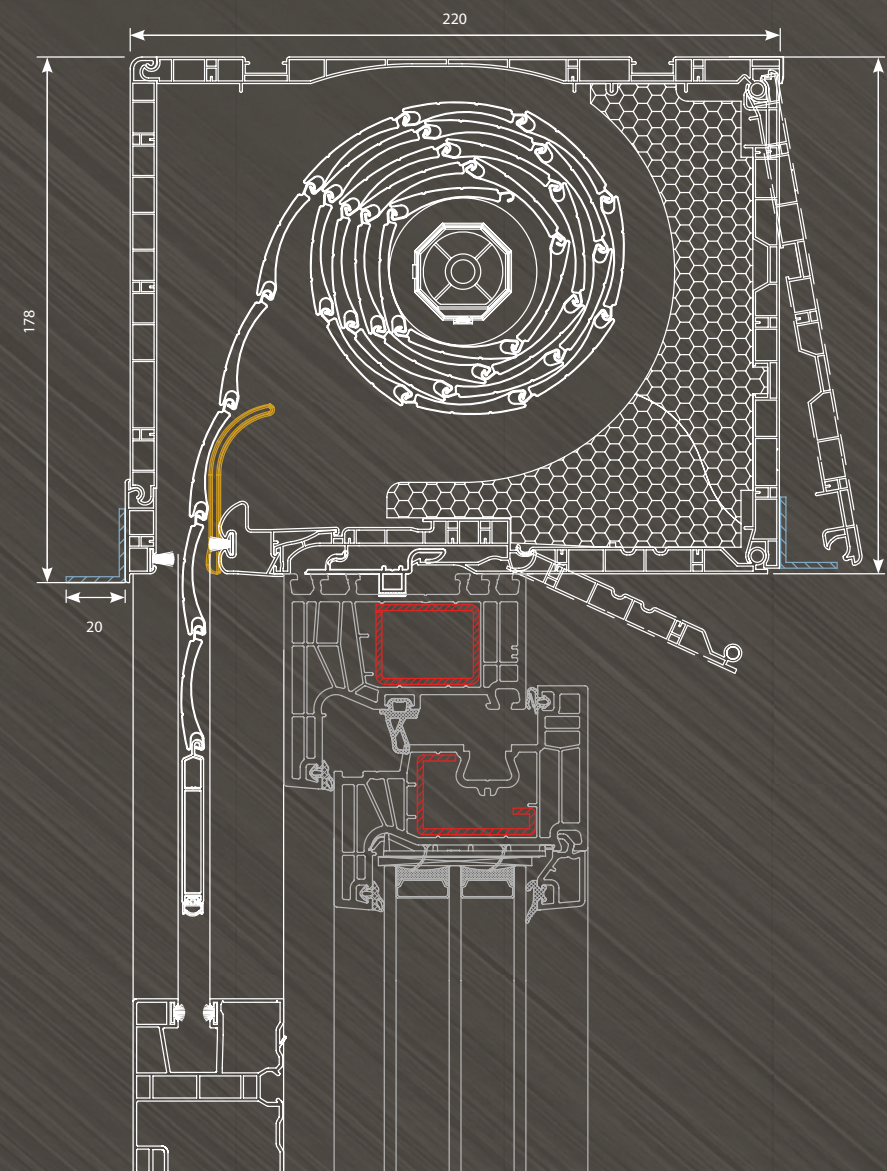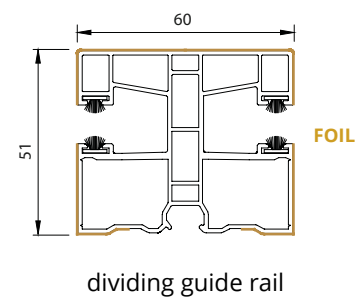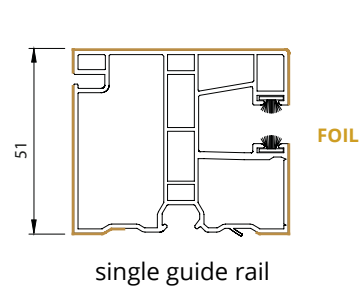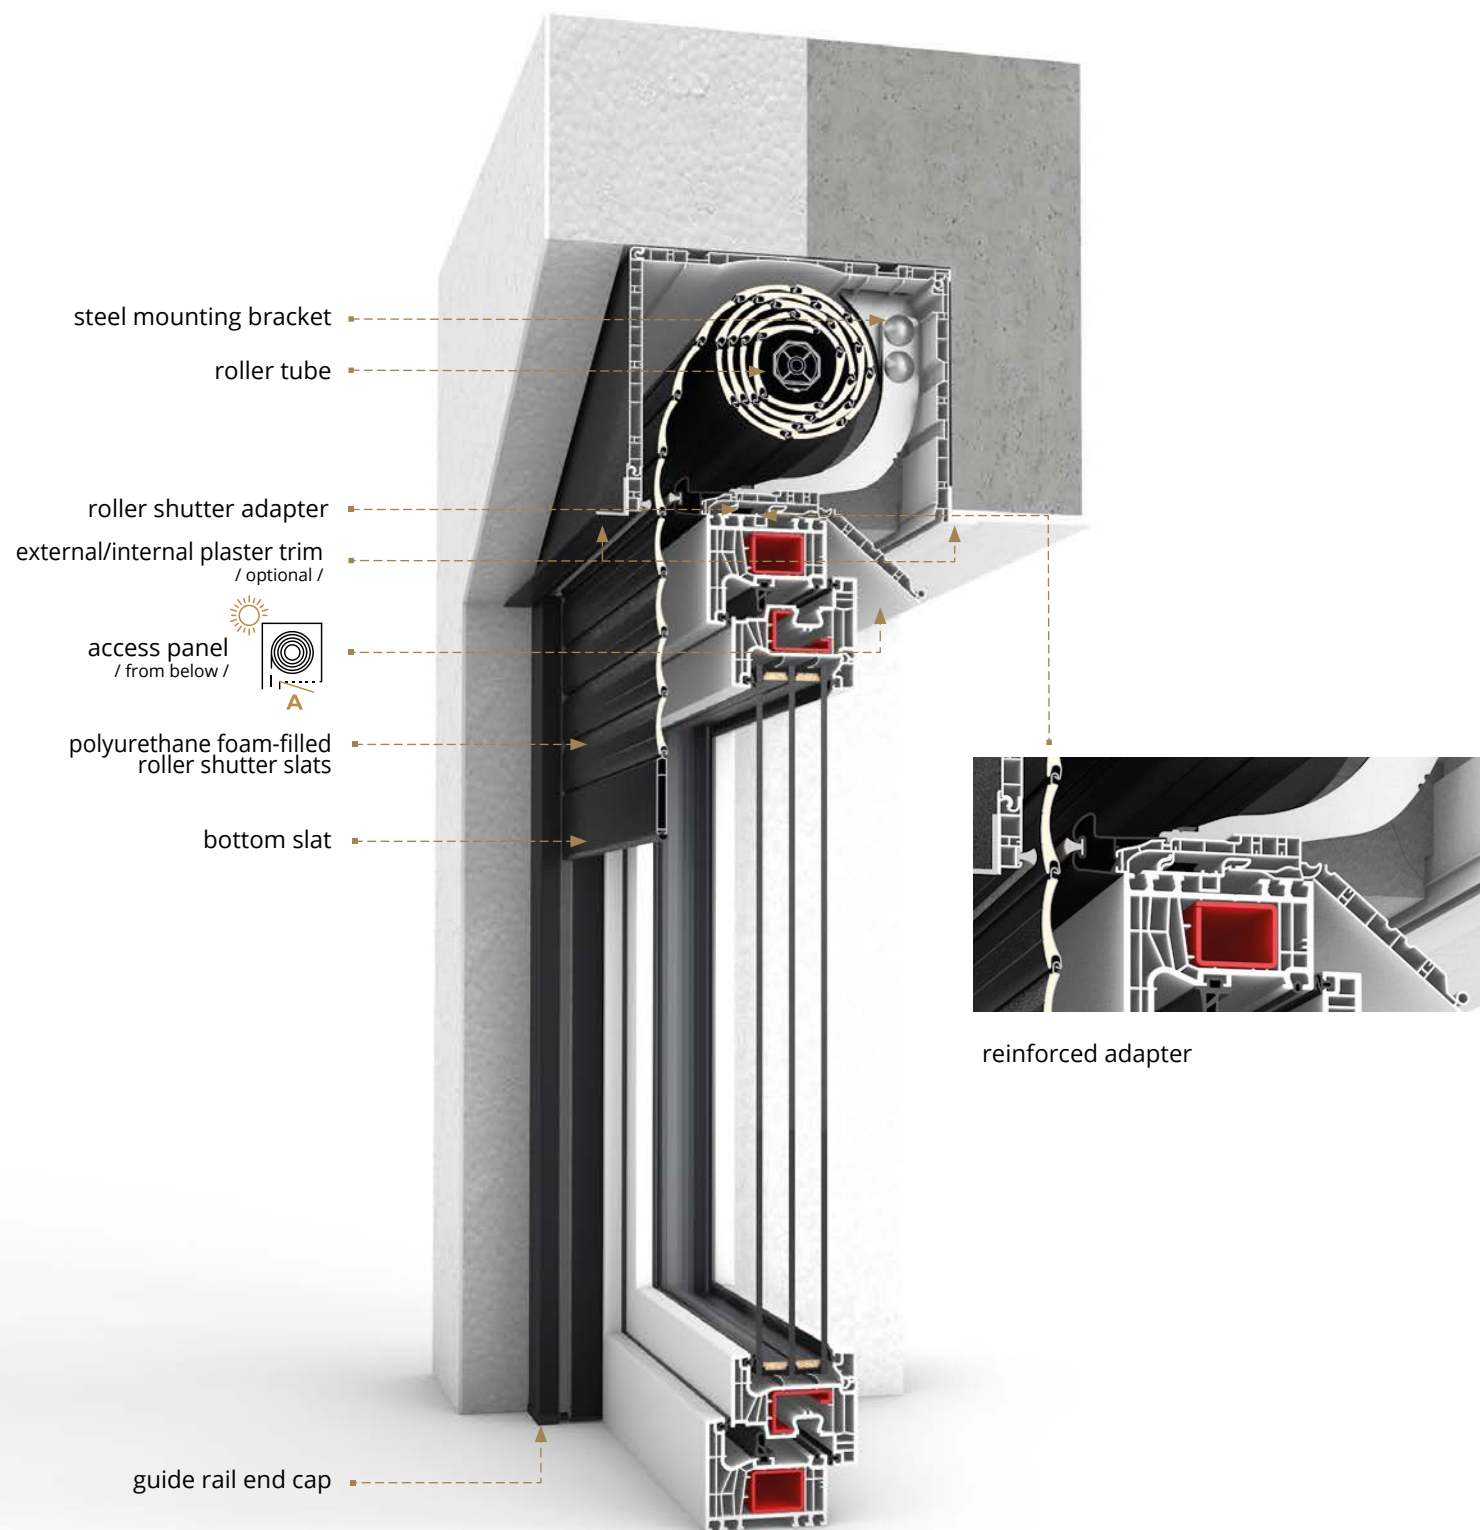

- headbox depth: 220 mm, with insect screen: 220 mm
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm
- two-piece static bracket from width 2400 mm allows for achieving optimal structural rigidity
- PVC or aluminum guide rails
- The specially designed reinforcement, installed from a width of 1500 mm, ensures optimum system rigidity and wind resistance.
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter
- bottom rail with concealed stopper or buffer
- roll-up insect screen that can be installed at any stage, even after the roller shutter has been fitted
- possibility of mounting the roller shutter to the window
- standard 5° angled bottom guide rail end cap
- 55 mm extruded bottom slat

* for 175/220 mm box

RN 175



175
installation height
/ mm /




220
installation depth
/ mm /

0,84*
U_{sb}



37mm | 42mm

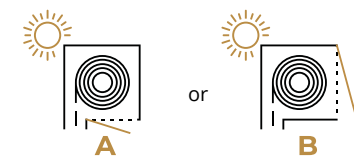

from the bottom or front side
inspection access





guide rail materials

PVC, aluminum, wood
max. window frame width: 164 mm


compatible systems




RA OW | OVAL ALUMINUM FRONT-MOUNTED ROLLER SHUTTER

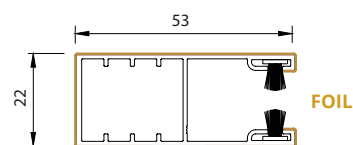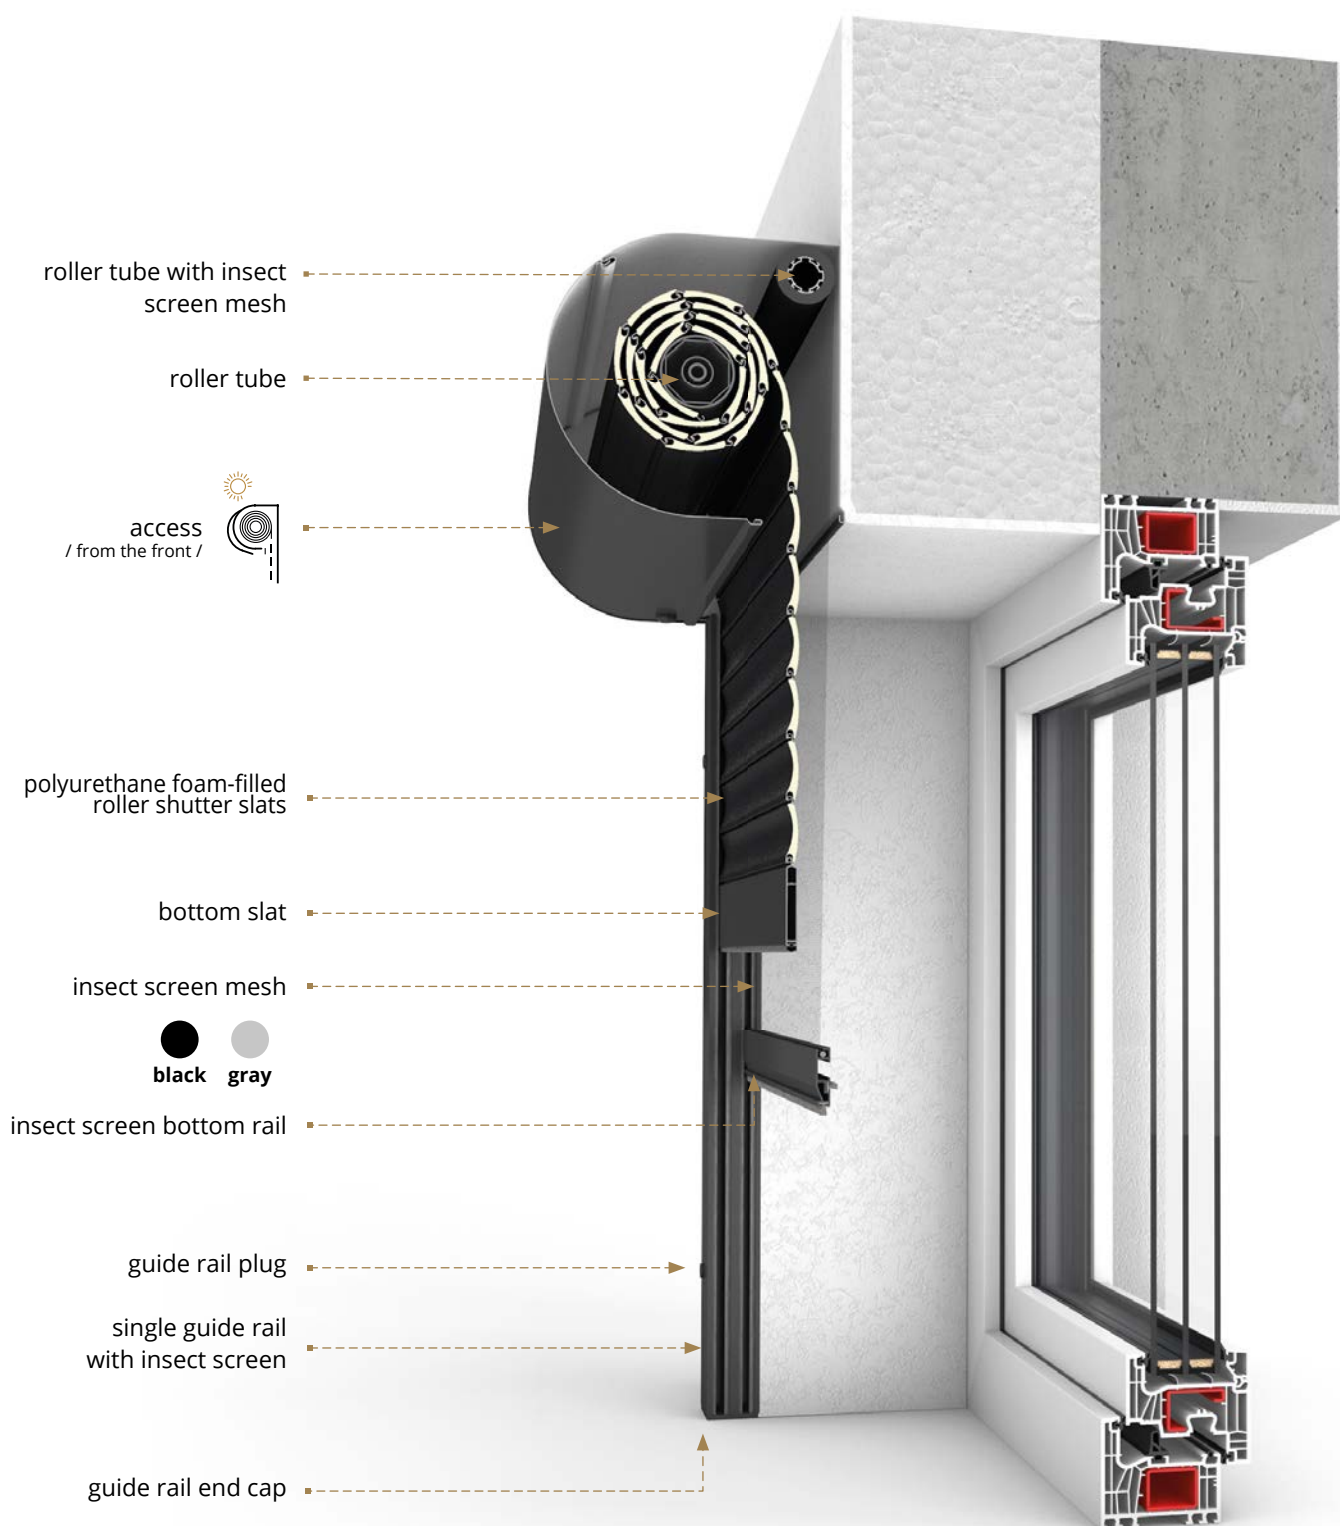

single guide rail



single guide rail with insect screen

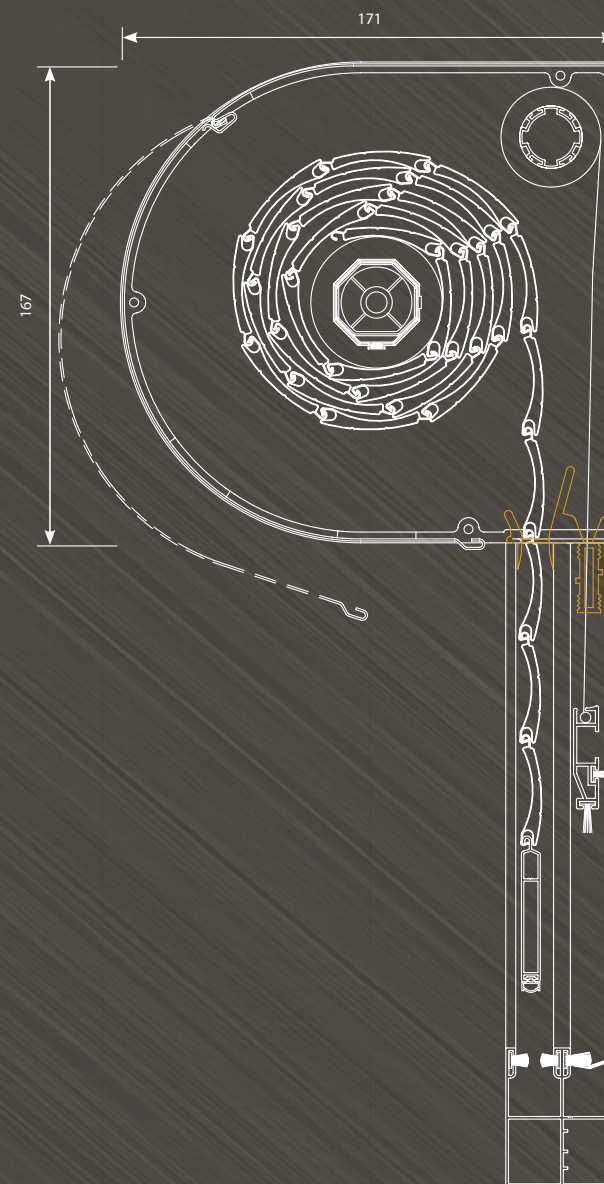

- solid aluminum construction
- aesthetic integration with the façade
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- easy installation in existing buildings
- roller* or pleated insect screen
- guide rail drilling on request
- 55 mm extruded bottom slat

* for 167 mm, 182 mm boxes and 37 mm and 42 mm slats

RA OW



139 / 144



167 / 171



182 / 188

roller shutter box dimensions
/ H. / D. mm /



ALUMINUM SLATS

37mm | 42mm | 55mm



façade-mounted





in recess,
left-hand roll

installation type


ALUMINUM

guide rail materials


RA 45° | 45° ALUMINUM FRONT-MOUNTED ROLLER SHUTTER

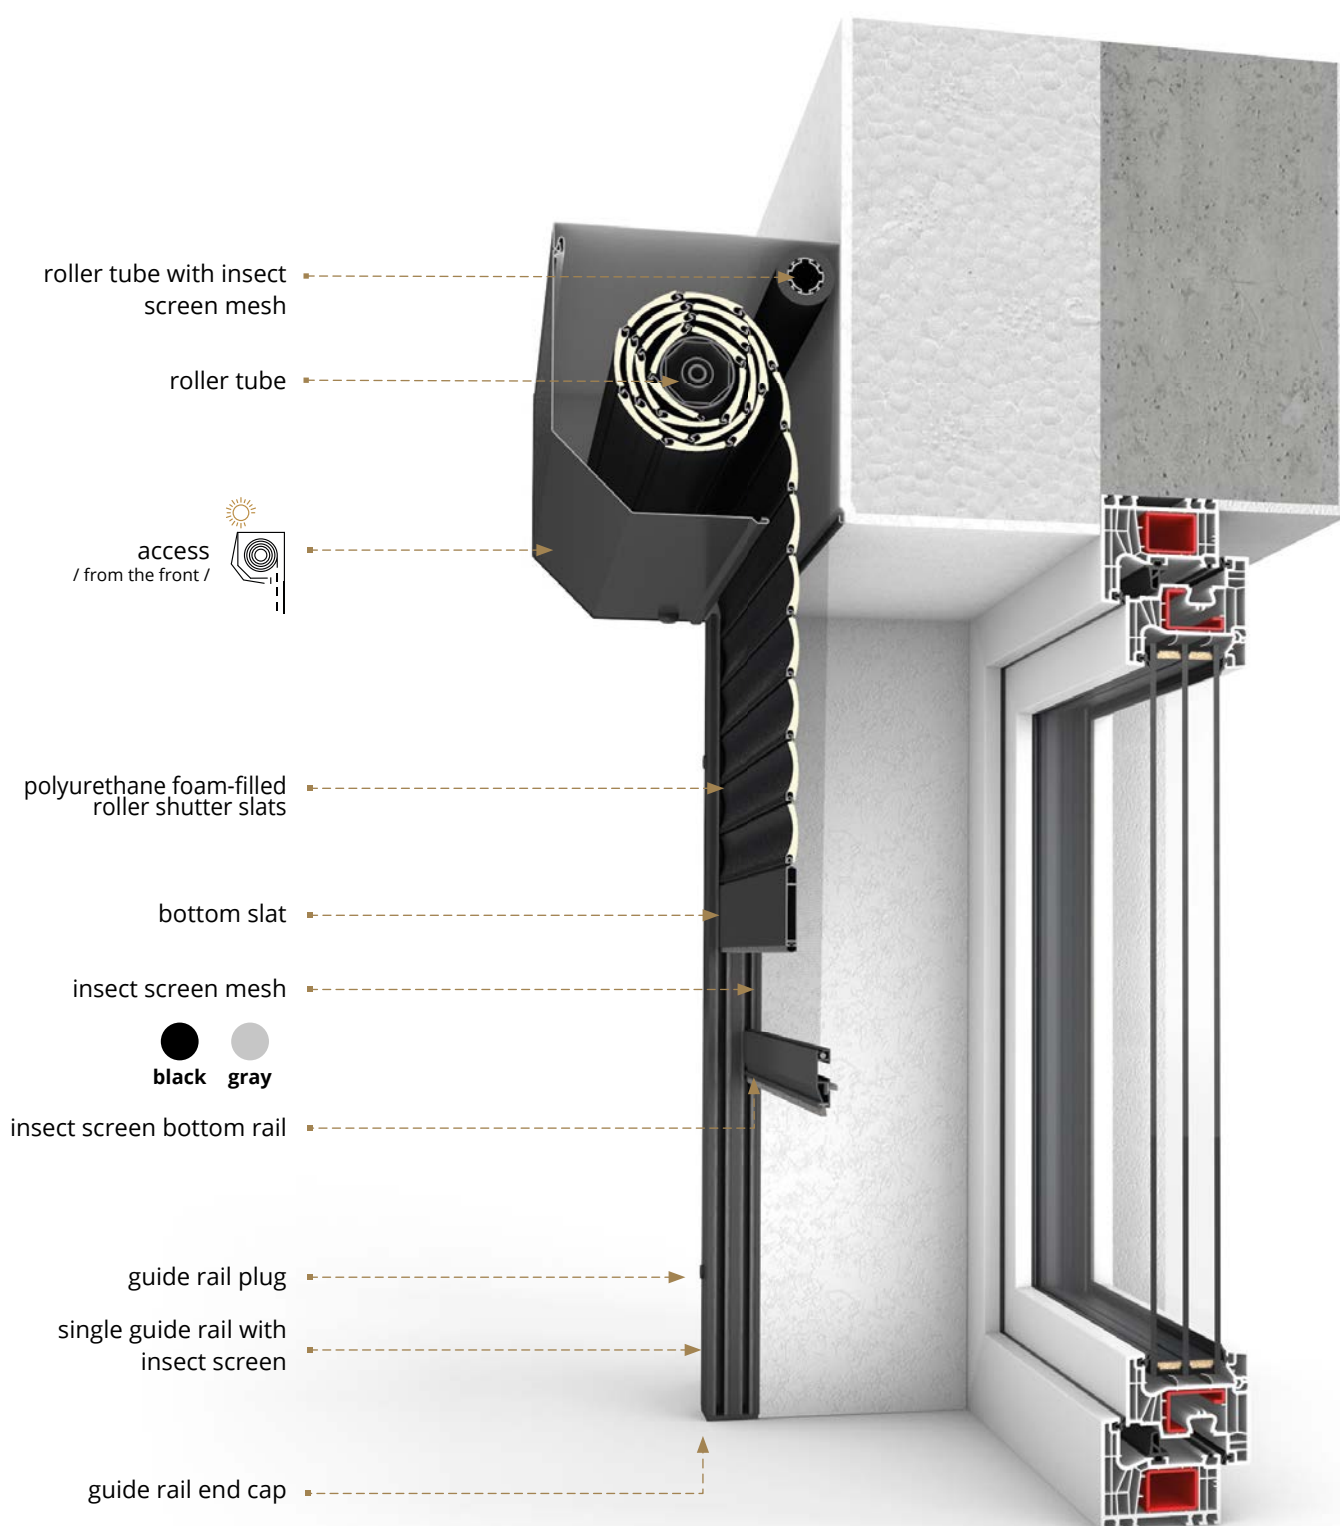

single guide rail



single guide rail with insect screen

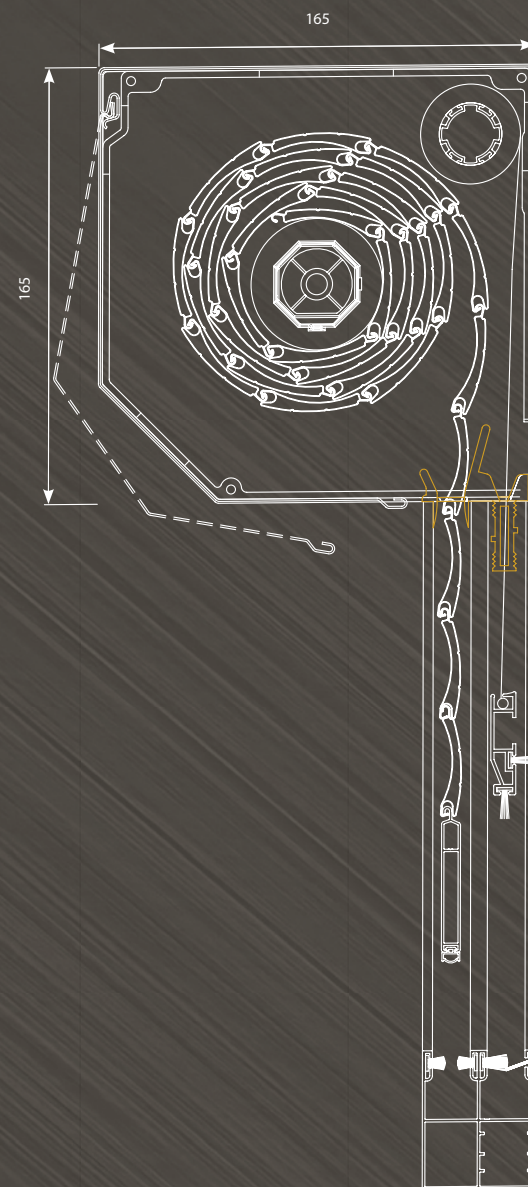

- solid aluminum construction
- box bevelled at a 45° angle
- aesthetic integration with the façade
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- easy installation in existing buildings
- roller* or pleated insect screen
- guide rail drilling on request
- 55 mm extruded bottom slat

RA 45°



137 / 137



165 / 165



180 / 180




205 / 205

roller shutter box dimensions
/ H. / D. mm /




ALUMINUM SLATS

37mm | 42mm | 55mm



façade-mounted



in recess,
left-hand roll



in recess,
right-hand roll



installation type

ALUMINUM


guide rail materials

* for 165 mm, 180 mm and 205 mm boxes and 37 mm and 42 mm slats


RA 90° | 90° ALUMINUM FRONT-MOUNTED ROLLER SHUTTER

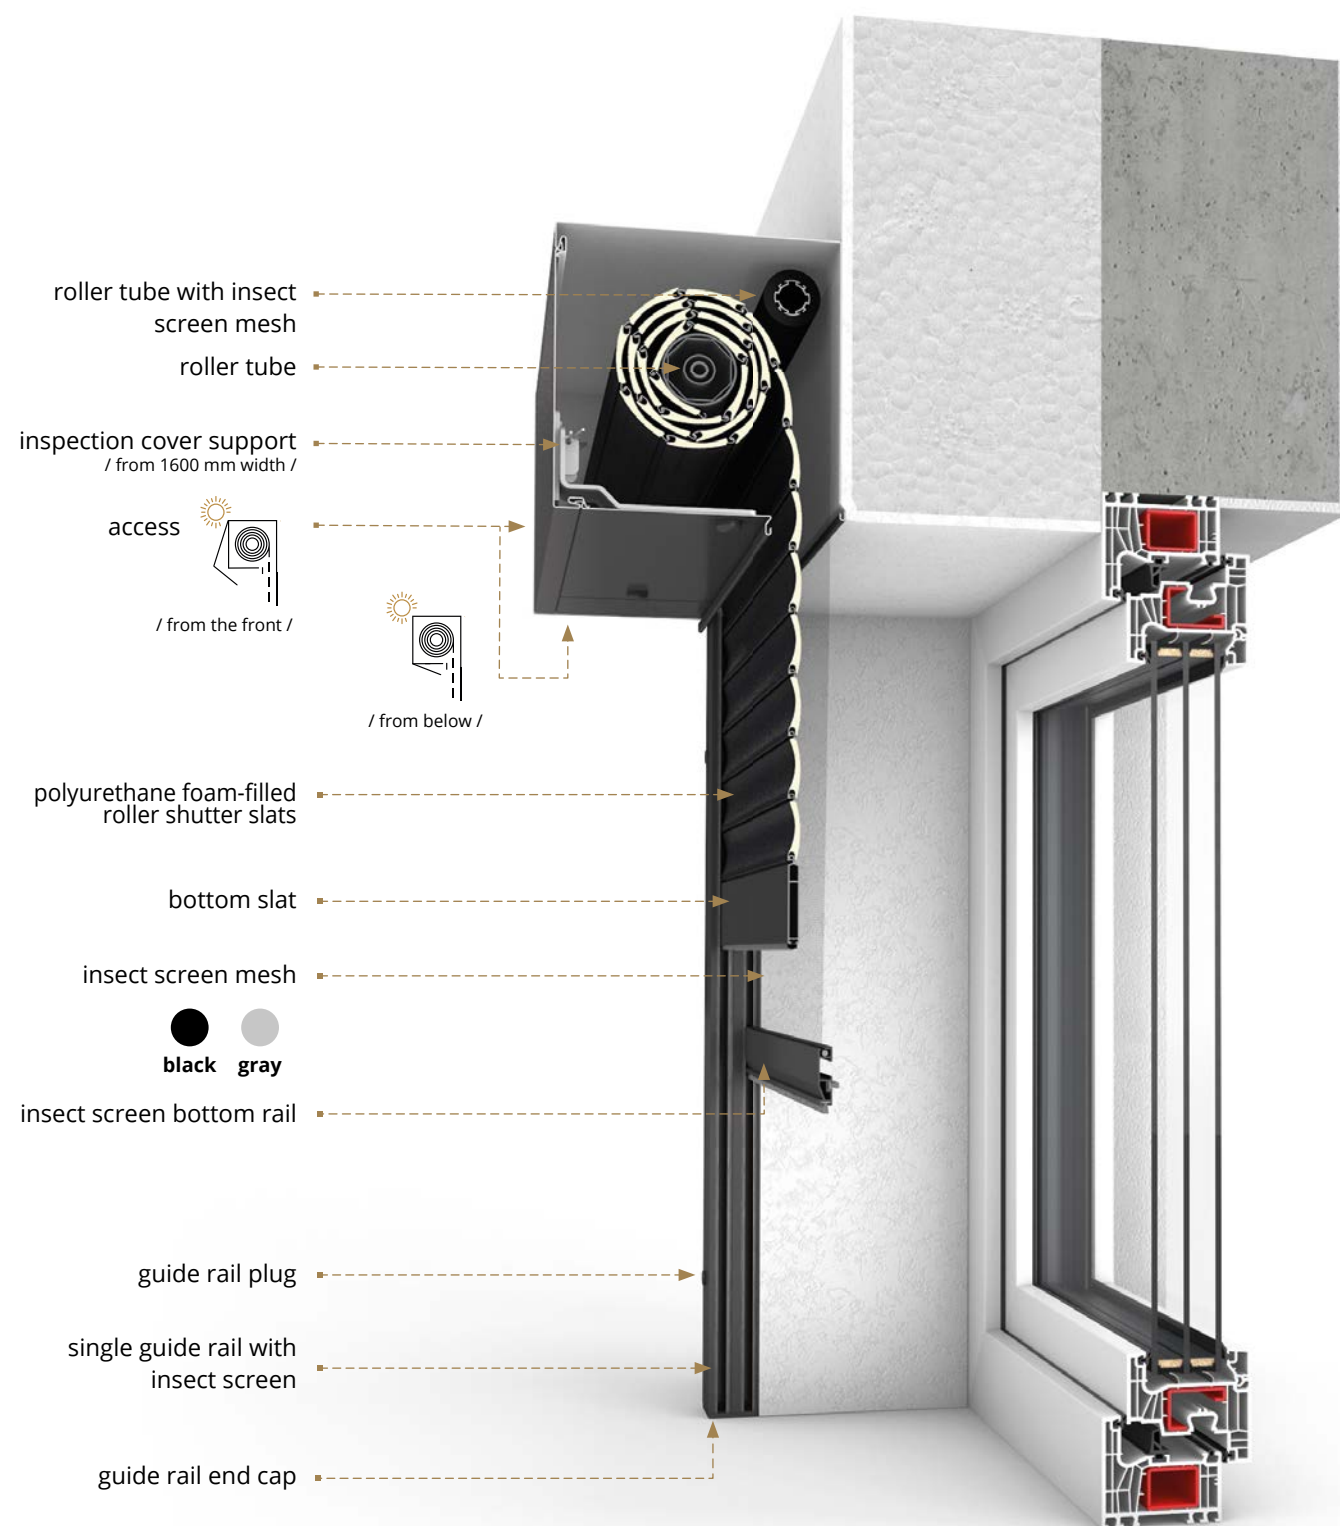

single guide rail

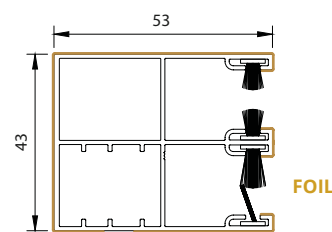

single guide rail with insect screen

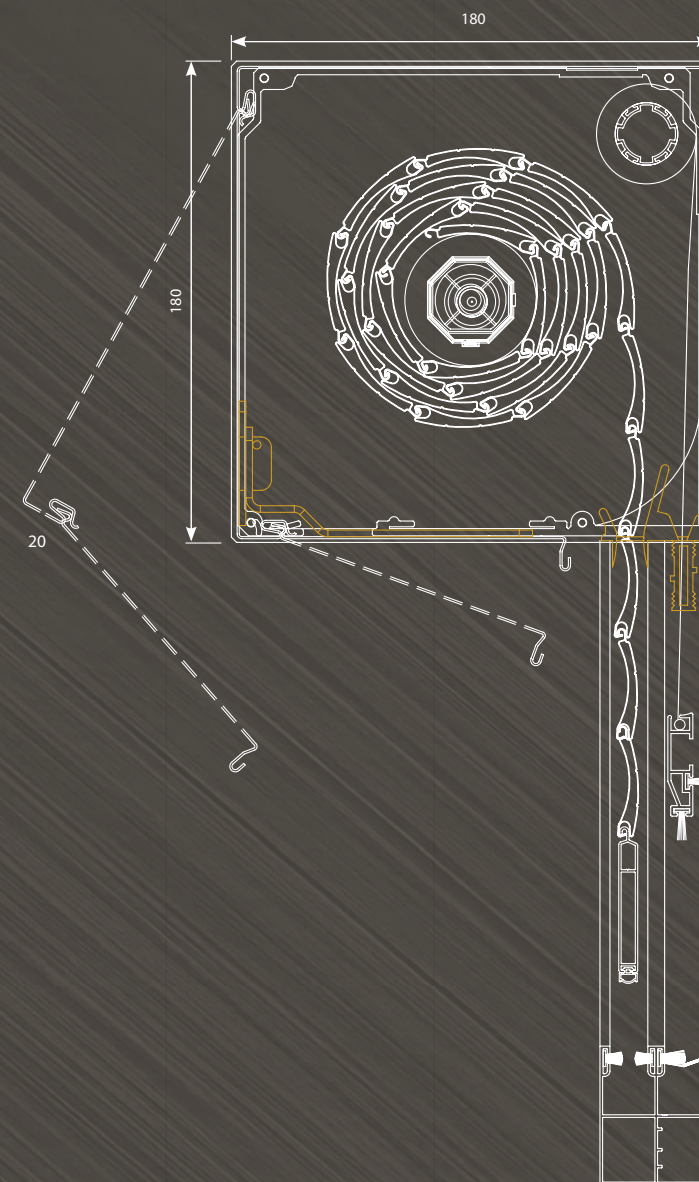

- adaptive roller shutter with a new box shape, fully painted box
- full front access to the box after removing the lower inspection cover
- wide range of RAL colors and decorative foils in line with the Drutex palette
- solid aluminum construction
- inspection cover supports from 1600 mm width
- available aluminum slats: 37 mm, 42 mm, 55 mm
- roller* or pleated insect screen
- guide rail drilling on request
- 55 mm extruded bottom slat

RA 90°



137 / 137



165 / 165



180 / 180




205 / 205

roller shutter box dimensions
/ H. / D. mm /




ALUMINUM SLATS


37mm | 42mm | 55mm



façade-mounted



in recess,
left-hand roll



in recess,
right-hand roll



installation type

ALUMINUM


guide rail materials

* for 165 mm, 180 mm and 205 mm boxes and 37 mm and 42 mm slats


RA 90°P | 90°P CONCEALED ALUMINUM ROLLER SHUTTER

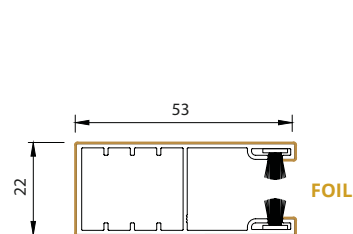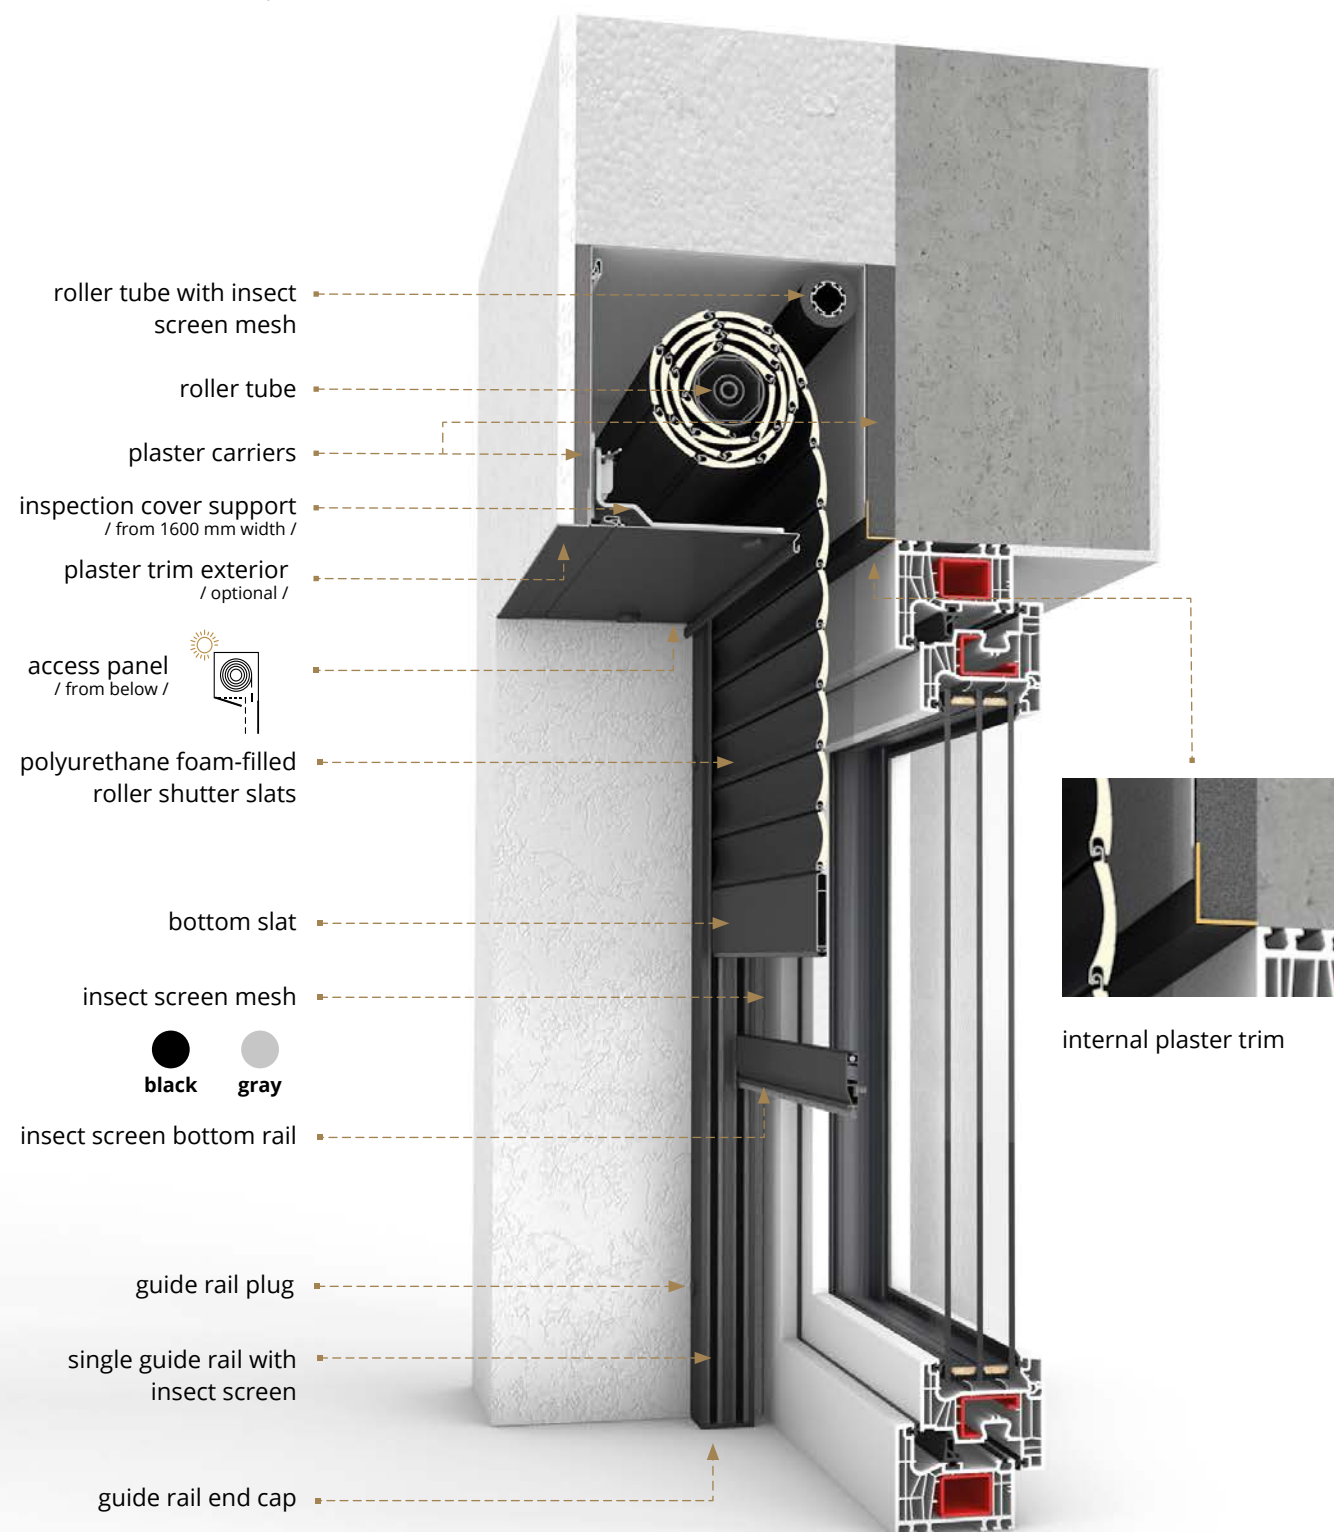

single guide rail



single guide rail with insect screen

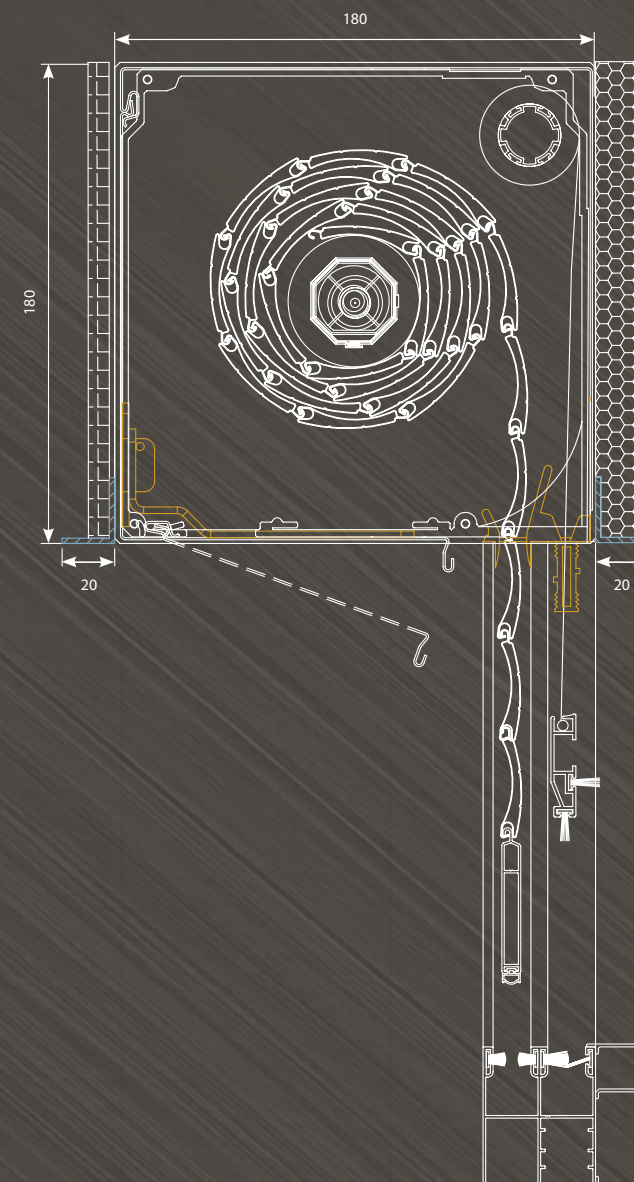

- roller shutter designed for concealed installation (box in raw aluminum)
- solid aluminum construction
- inspection cover supports from 1600 mm width
- system designed for the use of an 8 or 20 mm plaster carrier and a plastering strip, ensuring an aesthetic concealed installation of the roller shutter
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- roller* or pleated insect screen
- guide rail drilling on request

* for 165 mm, 180 mm and 205 mm boxes and 37 mm and 42 mm slats

RA 90°P



137 / 137



165 / 165



180 / 180




205 / 205

roller shutter box dimensions
/ H. / D. mm /



ALUMINUM SLATS

37mm | 42mm | 55mm



concealed



installation type

ALUMINUM


guide rail materials



RSZ | EPS ROLLER SHUTTER WITH EXTERNAL ACCESS

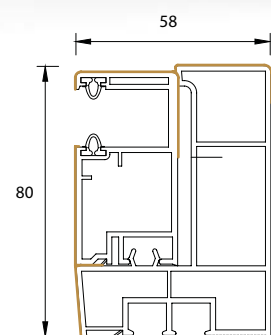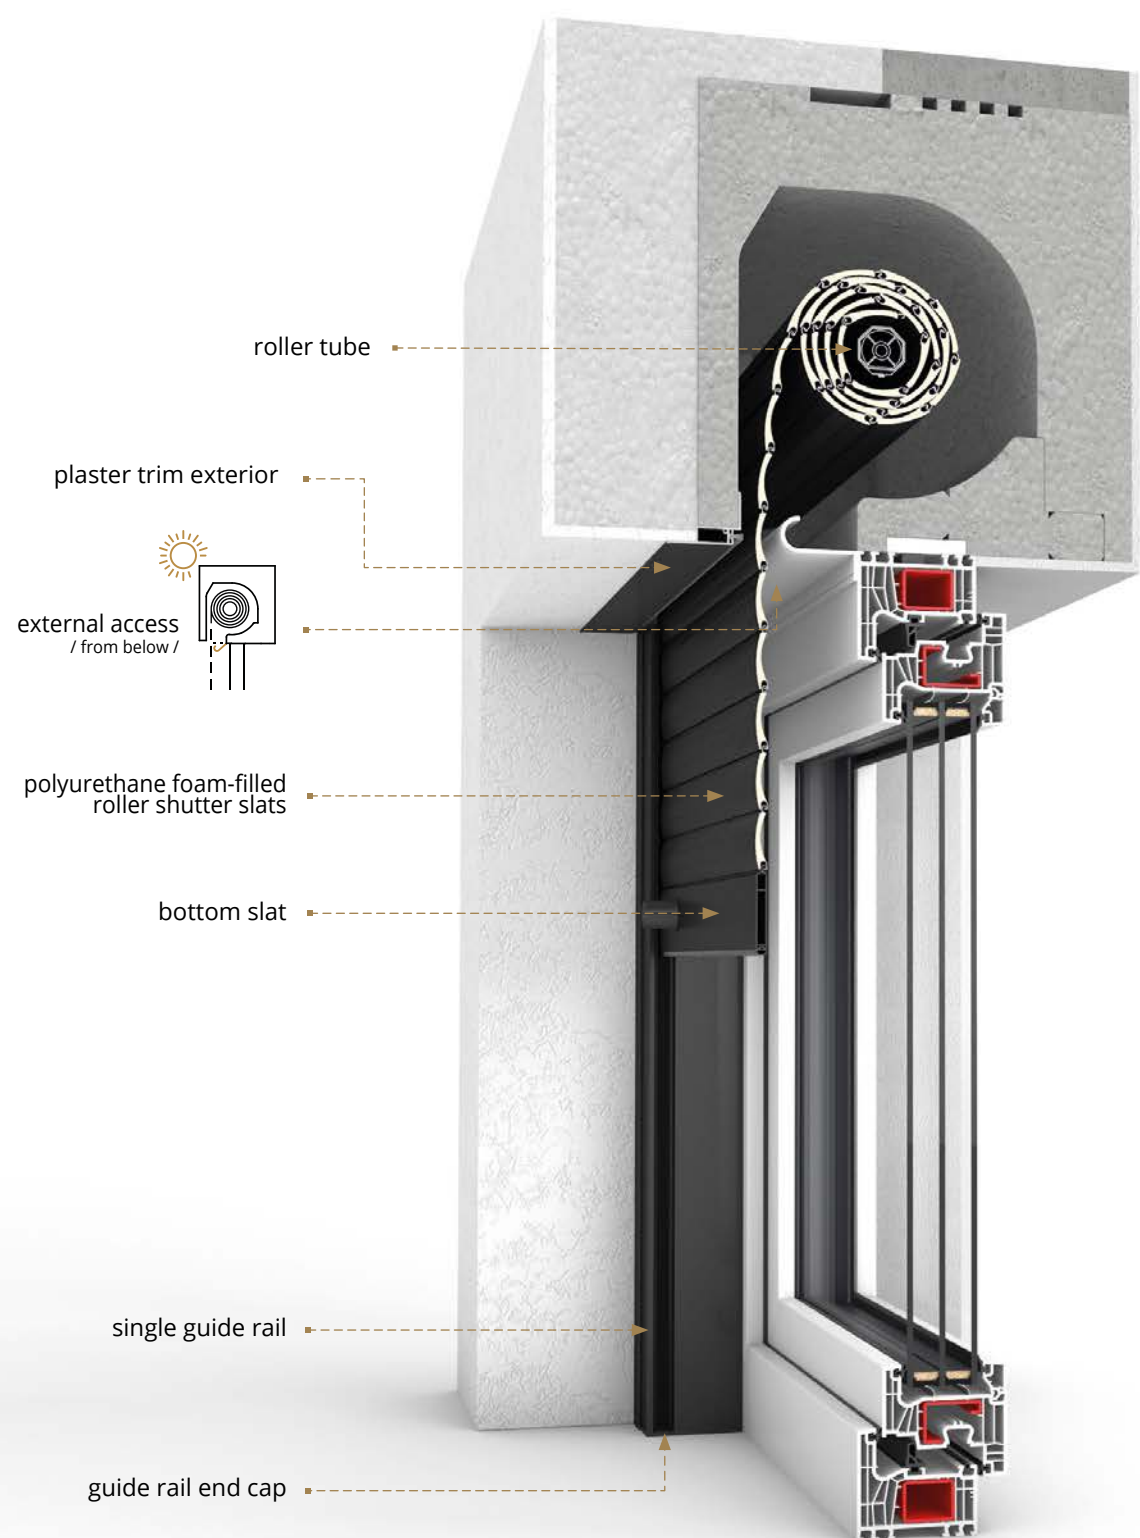


single guide rail

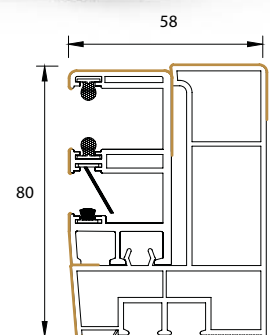

single guide rail with insect screen

FOIL

FOIL

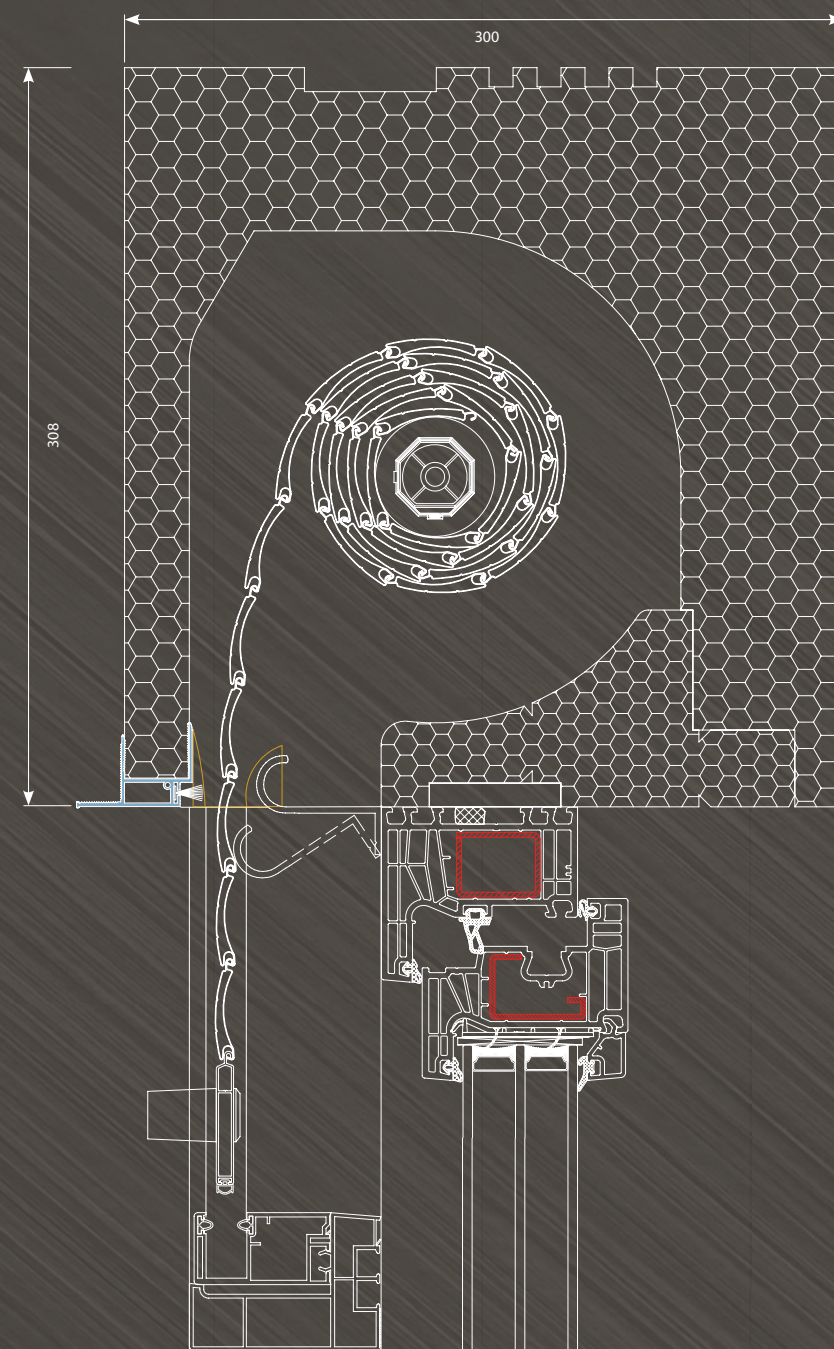

- high thermal and acoustic insulation
- external access
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- PVC and aluminum guide rails
- the system features an external plaster trim for an aesthetically integrated roller shutter installation
- external plastering strip: up to 2999 mm in PVC, from 3000 mm in aluminum
- bottom slat with buffers
- roll-up insect screen*
- possibility of mounting the roller shutter to the window
- 55 mm extruded bottom slat

* for 37 mm and 42 mm slats

** for 308/425 mm box

RSZ



275 | 308

installation height
/ mm /



260 | 300 | 365 | 425

installation depth
/ mm /

0,34**

U_{sb}



ALUMINUM SLATS

37mm | 42mm | 55mm



from below, from the outside
inspection access

PVC

ALUMINUM



guide rail materials

PVC, aluminum, wood

compatible systems



RSW | EPS ROLLER SHUTTER WITH INTERNAL INSPECTION ACCESS

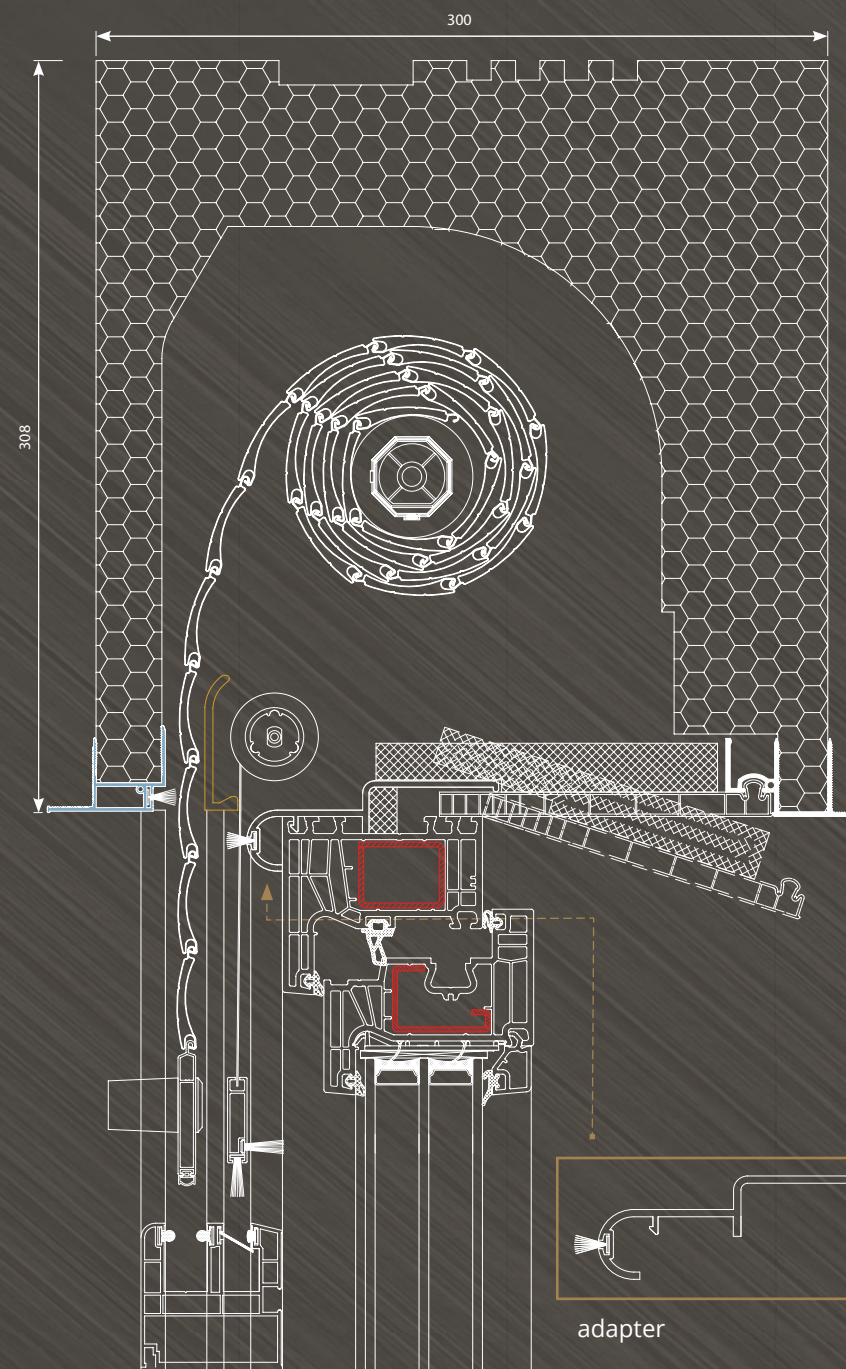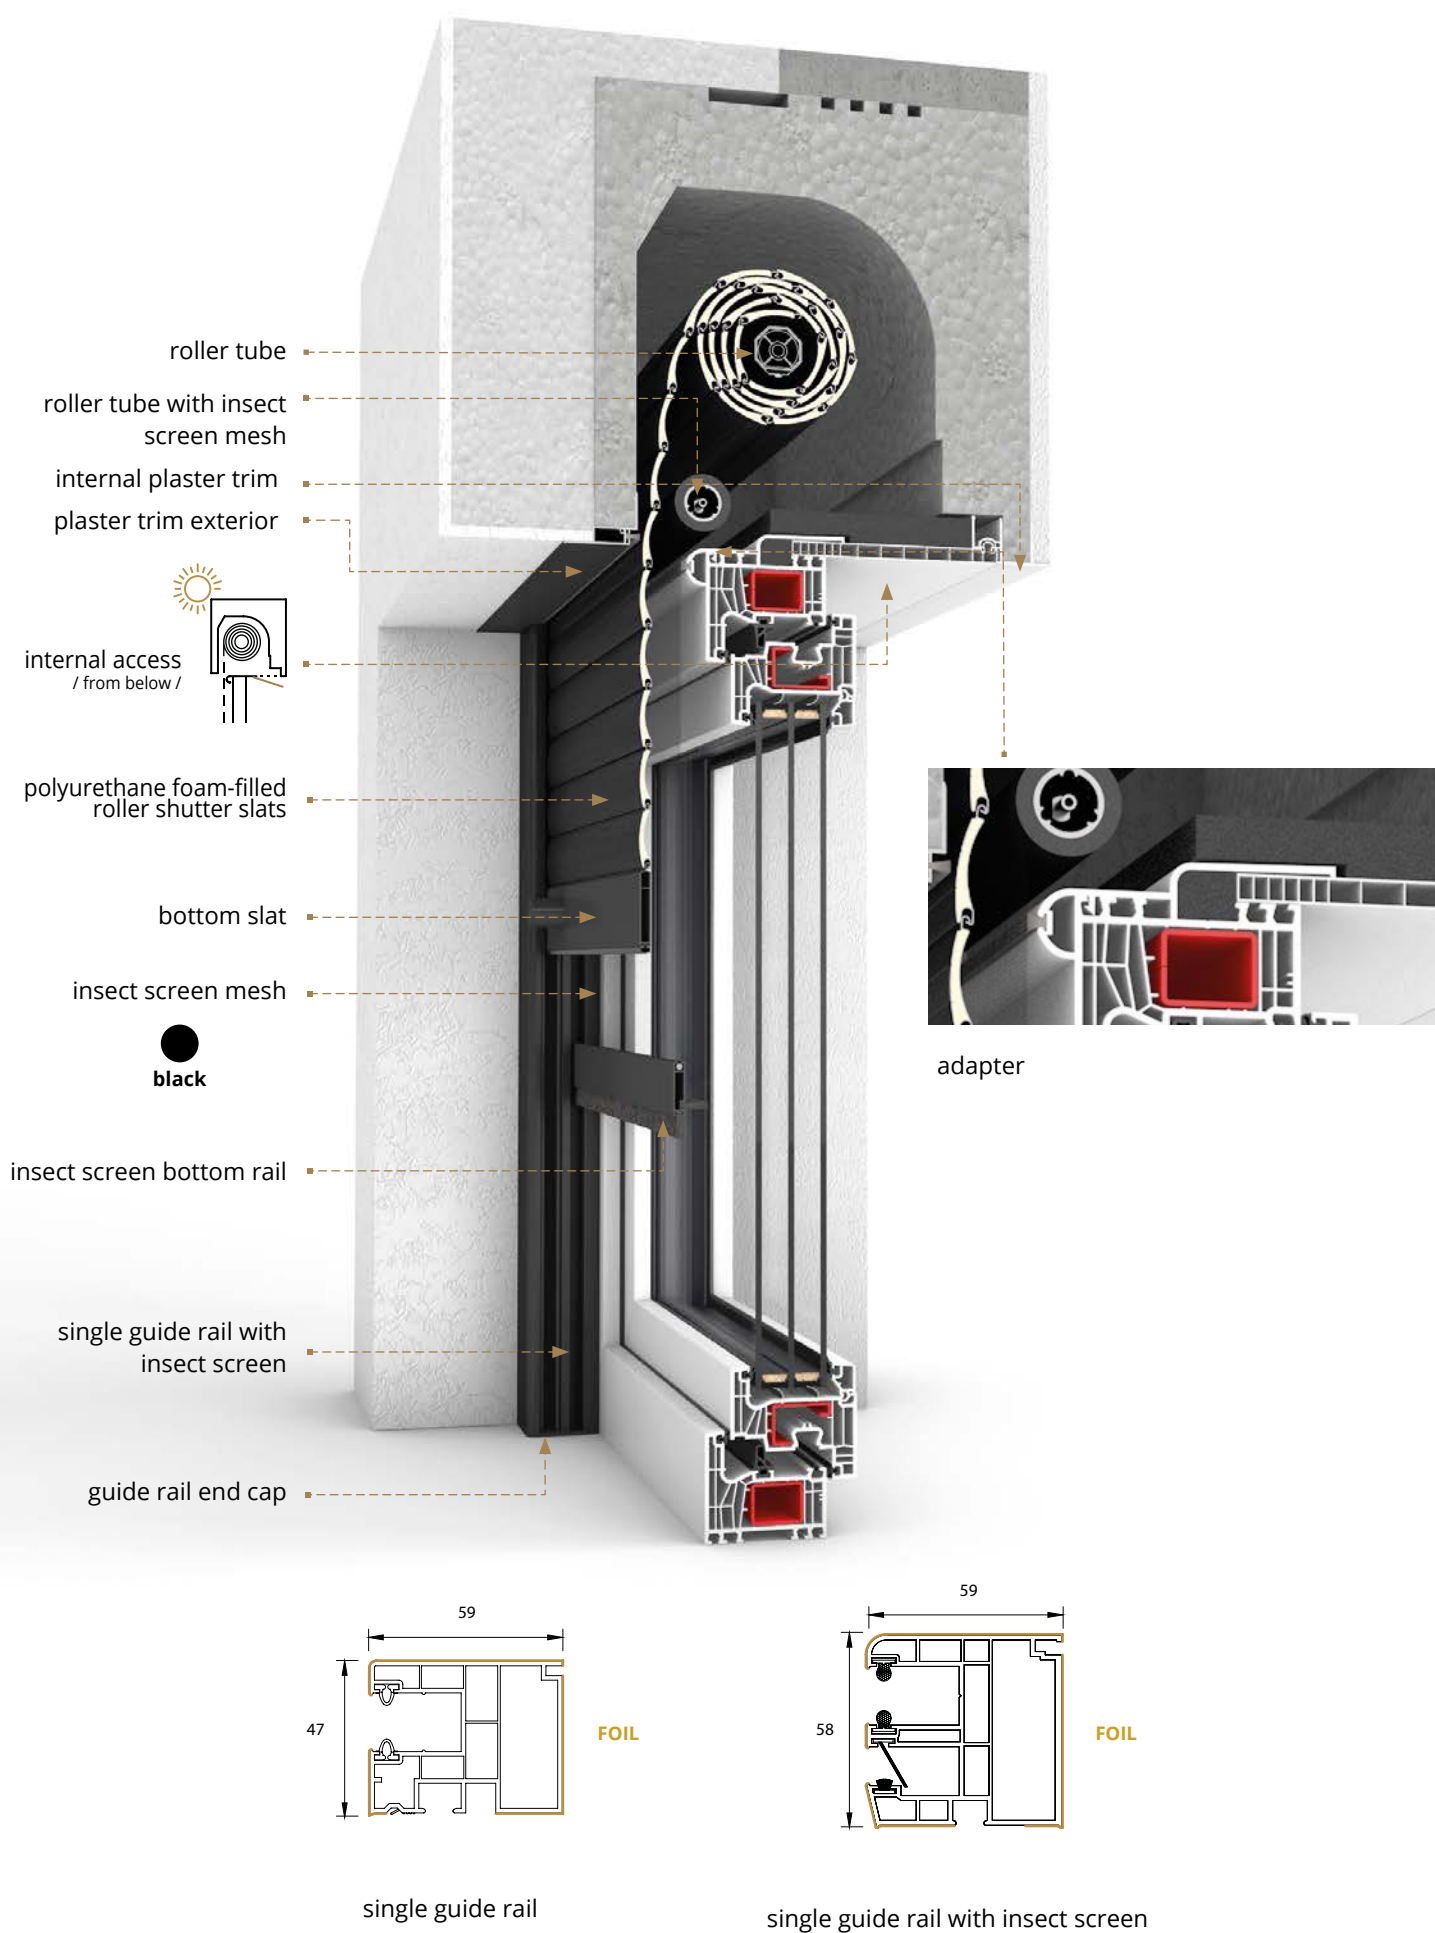

- high thermal and acoustic insulation
- internal access available only in white PVC
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- PVC and aluminum guide rails
- external plastering strip: up to 2999 mm in PVC, from 3000 mm in aluminum
- internal PVC plaster trim
- bottom slat with buffers
- roll-up insect screen*
- possibility of mounting the roller shutter to the window
- 55 mm extruded bottom slat

* for 37 mm and 42 mm slats
** for 308/425 mm box

RSW



275 | 308
installation height
/ mm /



260 | 300 | 365 | 425
installation depth
/ mm /

0,54**
U_{sb}



37mm | 42mm | 55mm



from below, from the inside
inspection access





guide rail materials

PVC, aluminum, wood
max. window frame width: 90 mm


compatible systems




BHZ | BECK&HEUN EPS ROLLER SHUTTER WITH EXTERNAL ACCESS

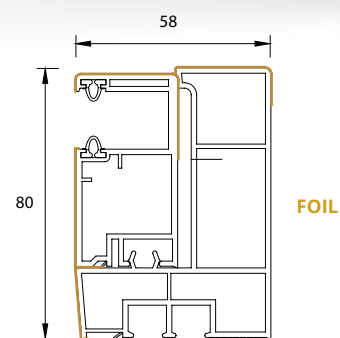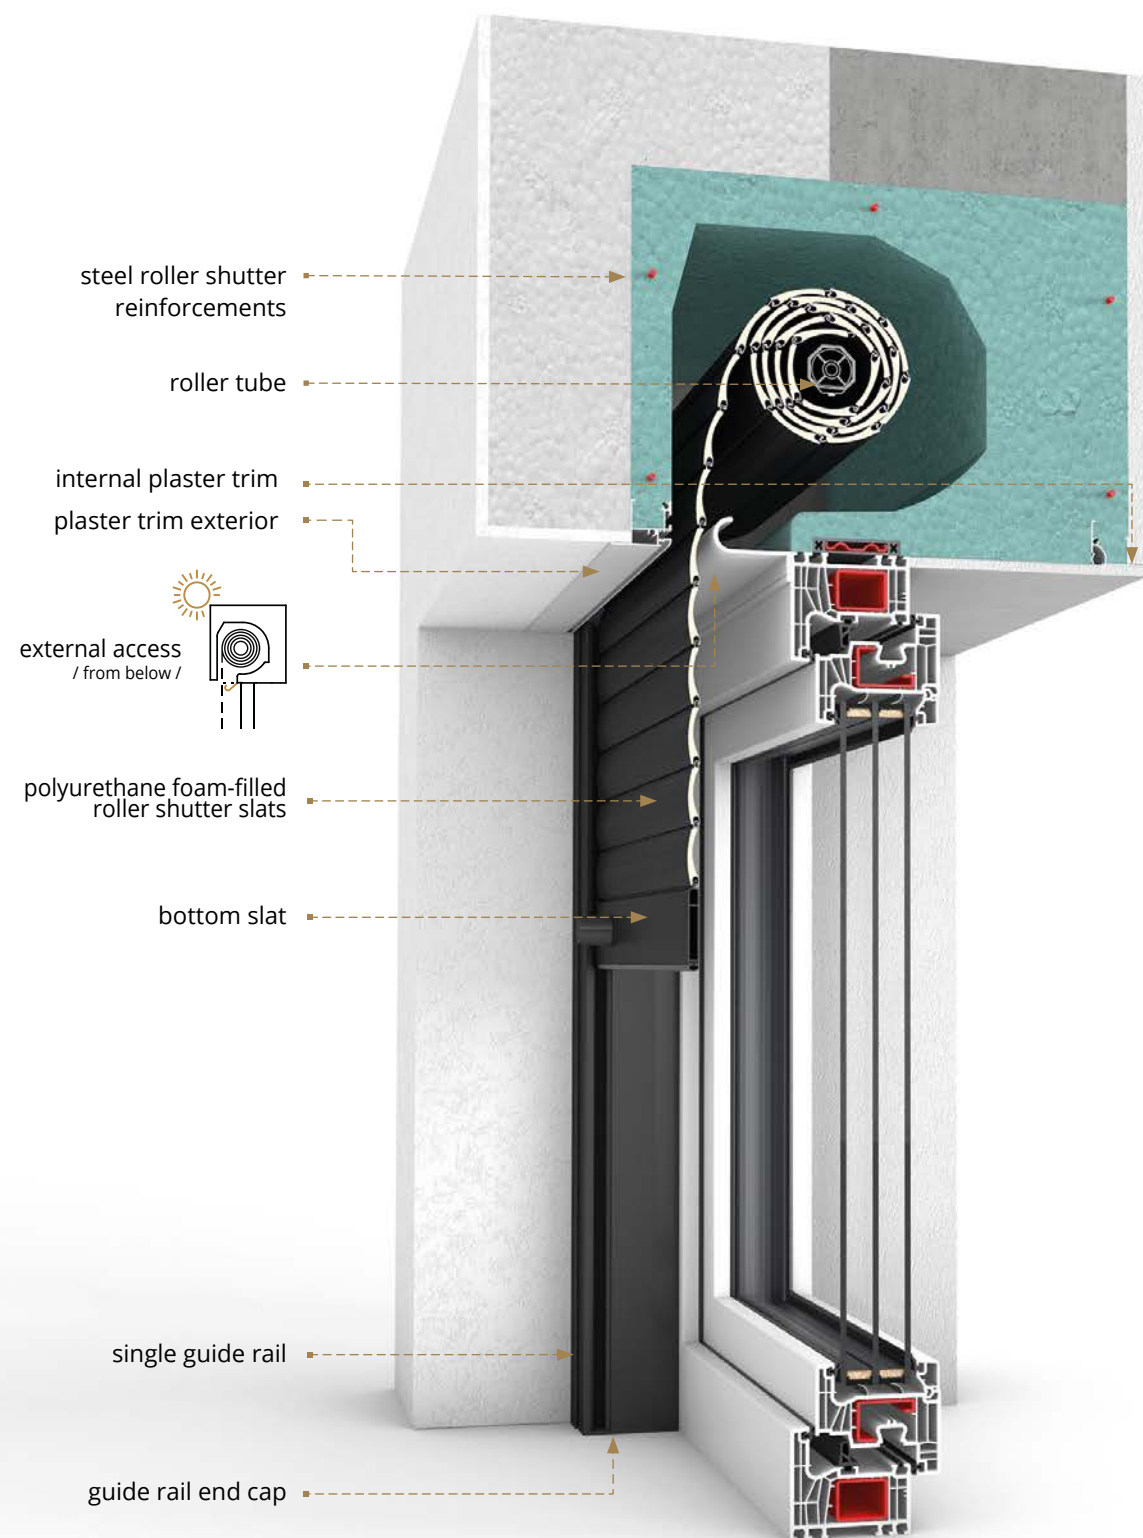

single guide rail

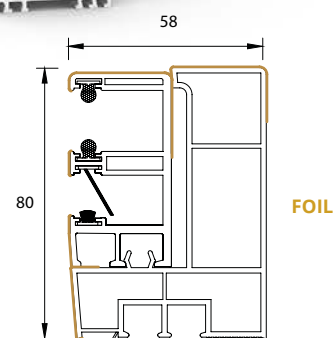

single guide rail with insect screen

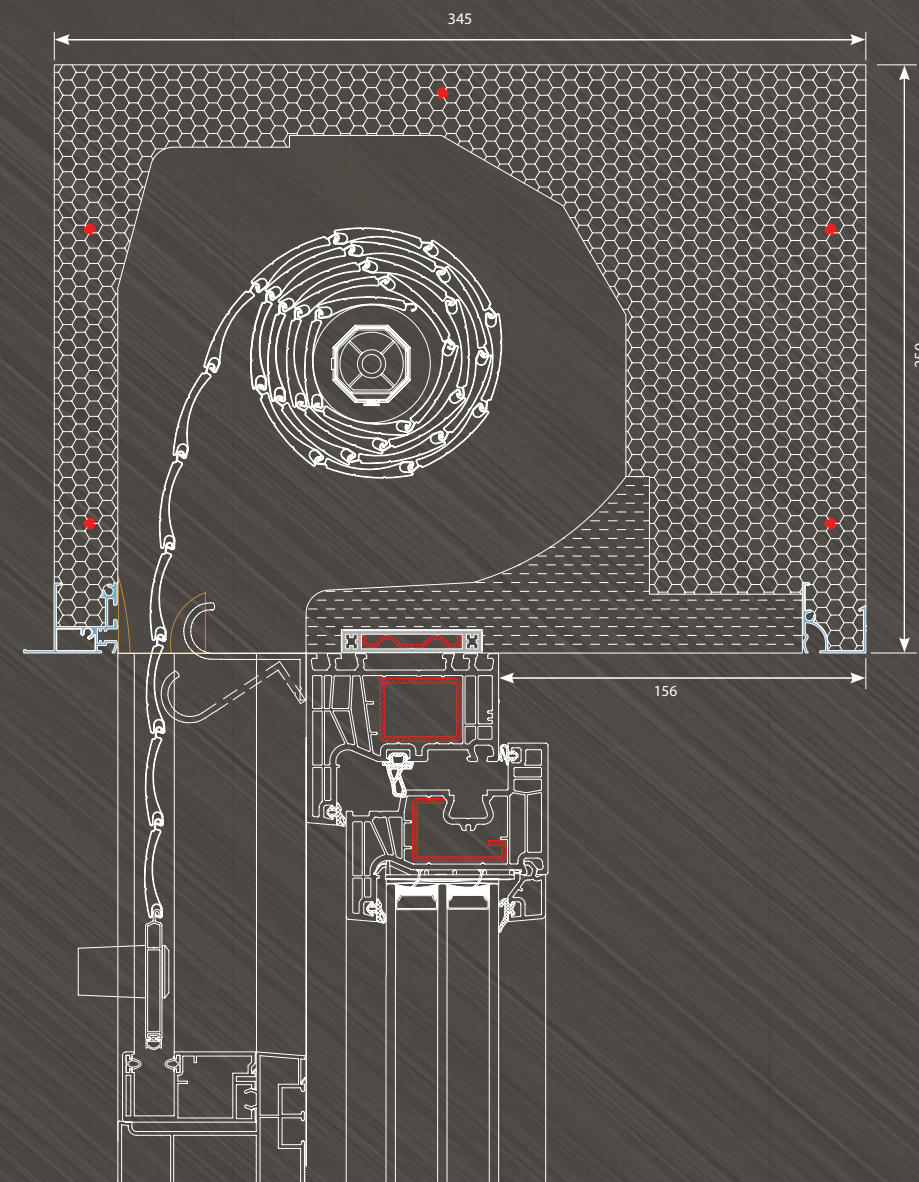

- high thermal and acoustic insulation
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- PVC and aluminum guide rails
- external and internal aluminum plastering strips
- bottom slat with buffers
- roll-up insect screen*
- possibility of mounting the roller shutter to the window
- 55 mm extruded bottom slat

* for 37 mm and 42 mm slats
** for 300/365 mm box

BHZ



250 | 300
installation height
/ mm /



260 | 280 | 300 | 345 | 365
installation depth
/ mm /

0,48**
U_{sb}



ALUMINUM SLATS

37mm | 42mm | 55mm



from below, from the outside
inspection access

PVC

ALUMINUM



guide rail materials

PVC, aluminum, wood


compatible systems




BHW | BECK&HEUN EPS ROLLER SHUTTER WITH INTERNAL ACCESS

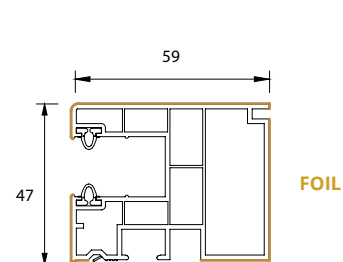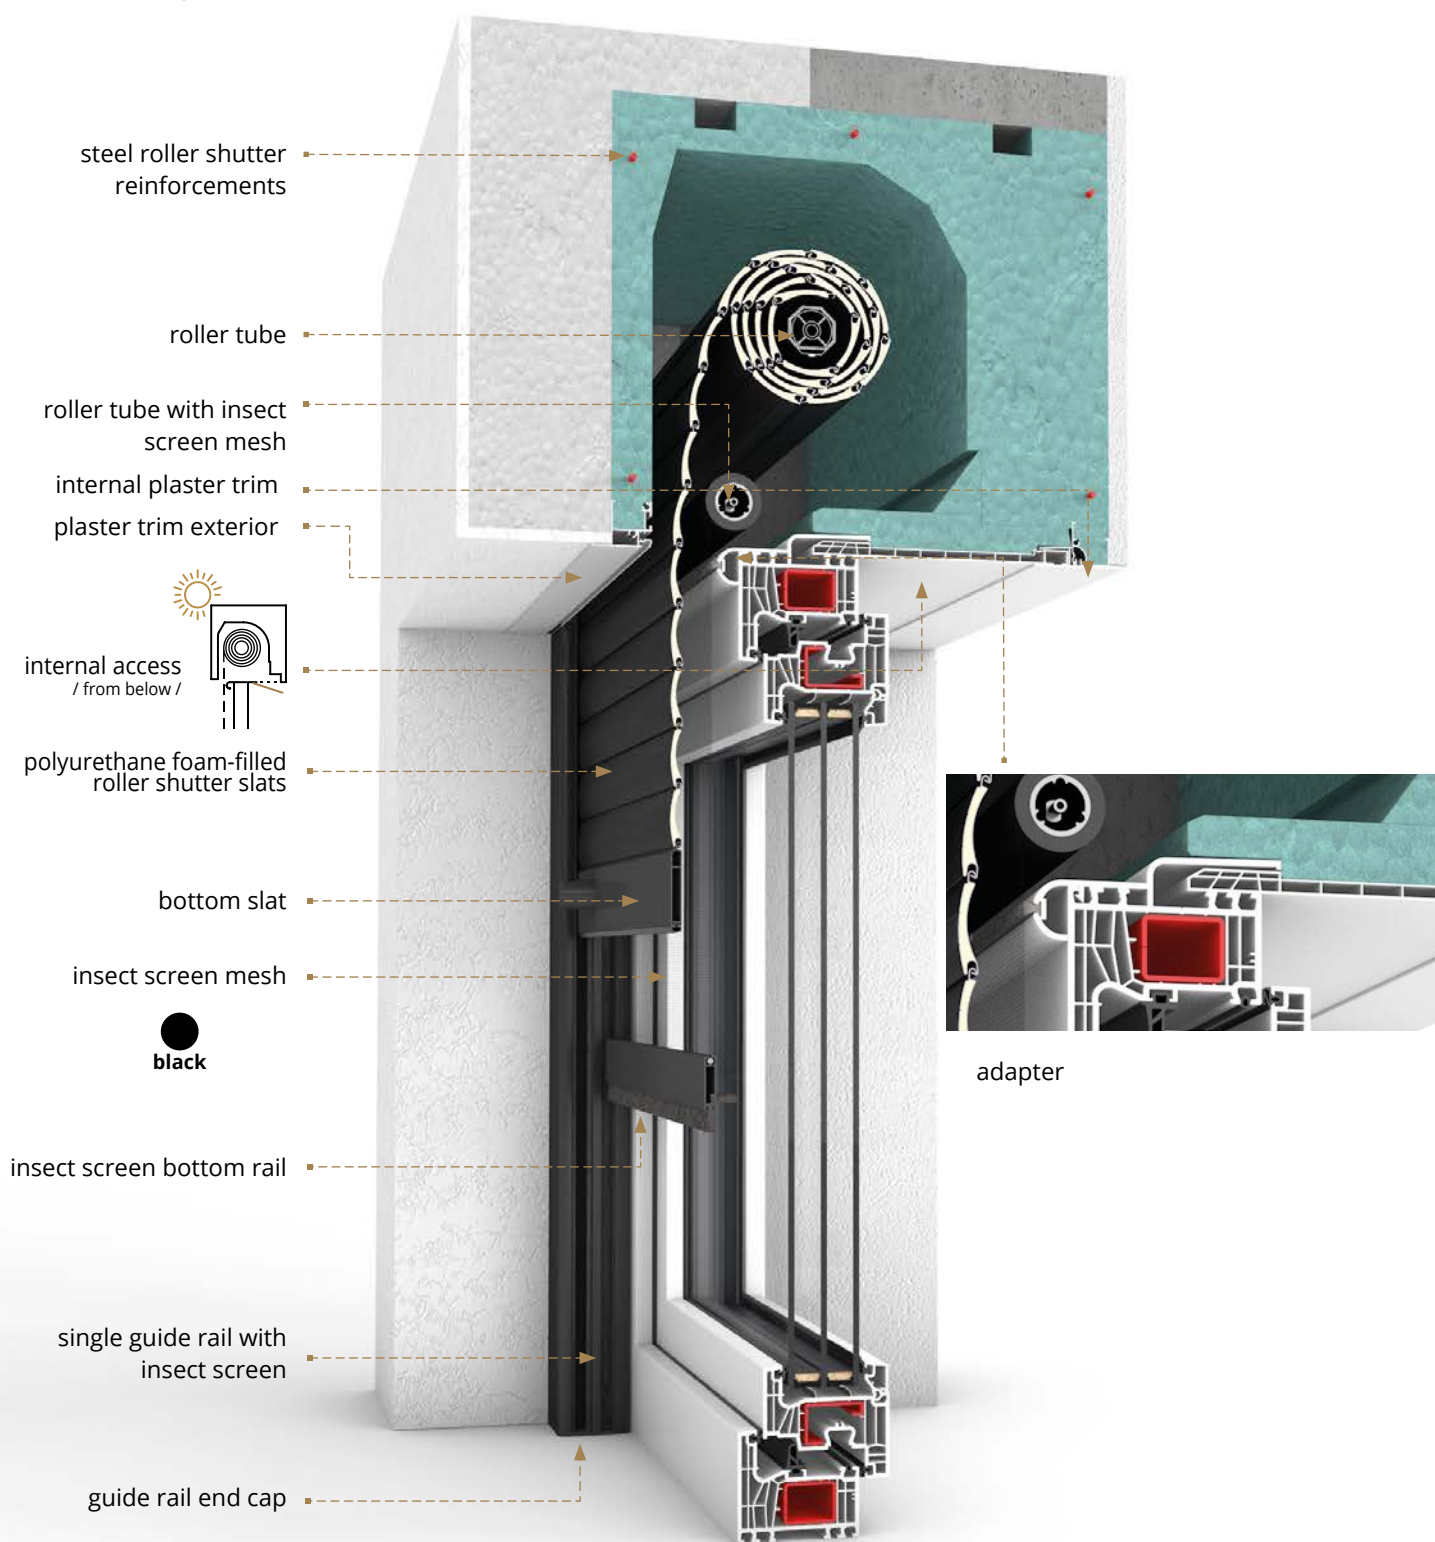

single guide rail

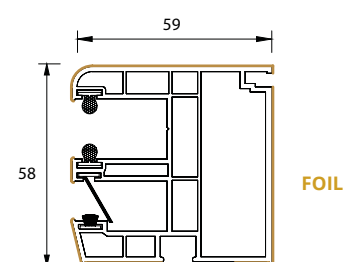

single guide rail with insect screen

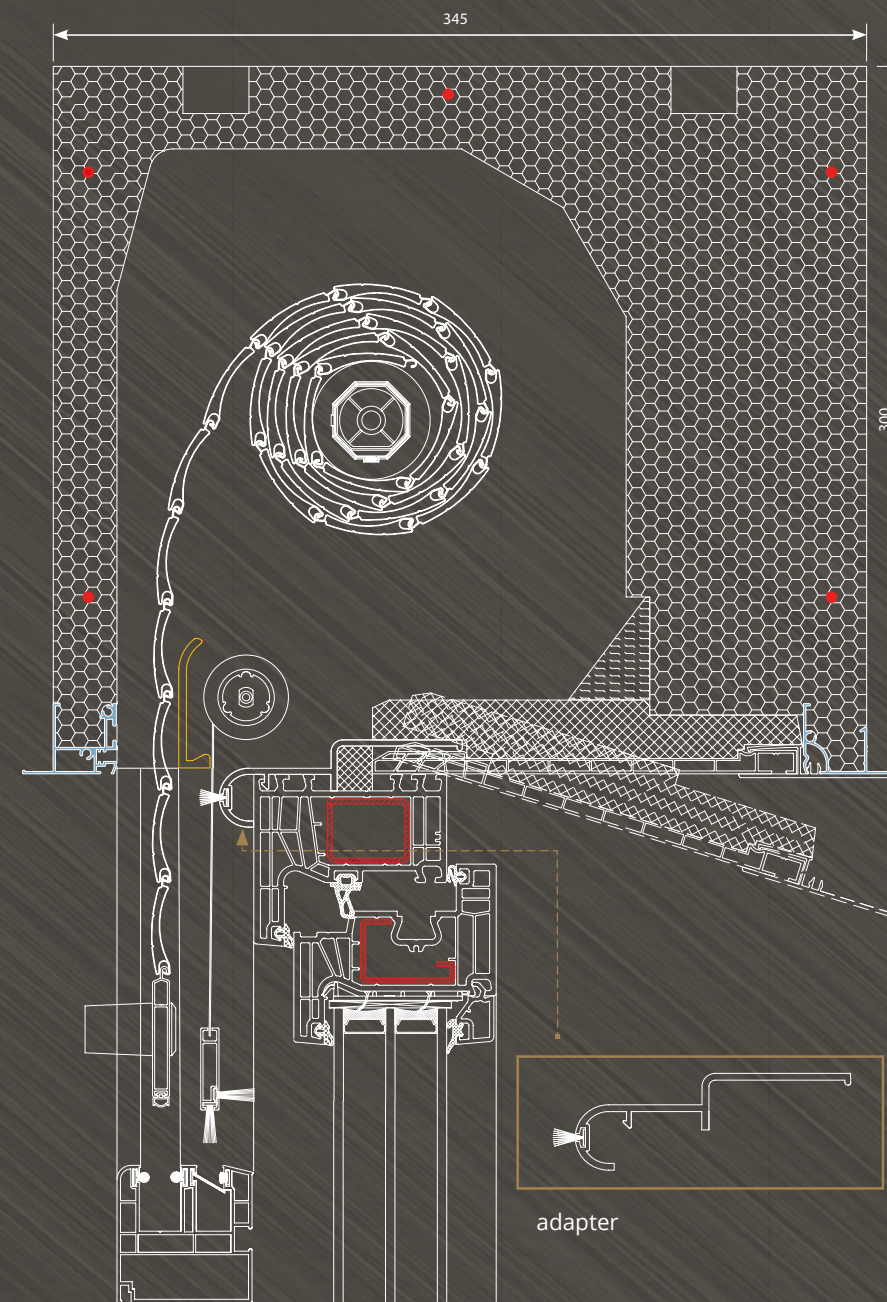

- high thermal and acoustic insulation
- internal access available only in white PVC
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm, 55 mm
- PVC and aluminum guide rails
- external and internal aluminum plastering strips
- bottom slat with buffers
- roll-up insect screen*
- possibility of mounting the roller shutter to the window
- 55 mm extruded bottom slat

* for 37 mm and 42 mm slats
** for 300/365 mm box

BHW



250 | 300
installation height
/ mm /



260 | 280 | 300 | 345 | 365
installation depth
/ mm /

0,59**
U_{sb}



ALUMINUM SLATS

37mm | 42mm | 55mm



from below, from the inside
inspection access

PVC

ALUMINUM



guide rail materials

PVC, aluminum, wood
max. window frame width: 90 mm


compatible systems




LAVIUDA | TOP-MOUNTED PVC ROLLER SHUTTER

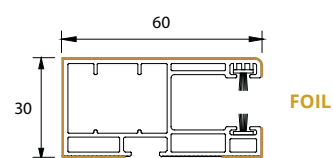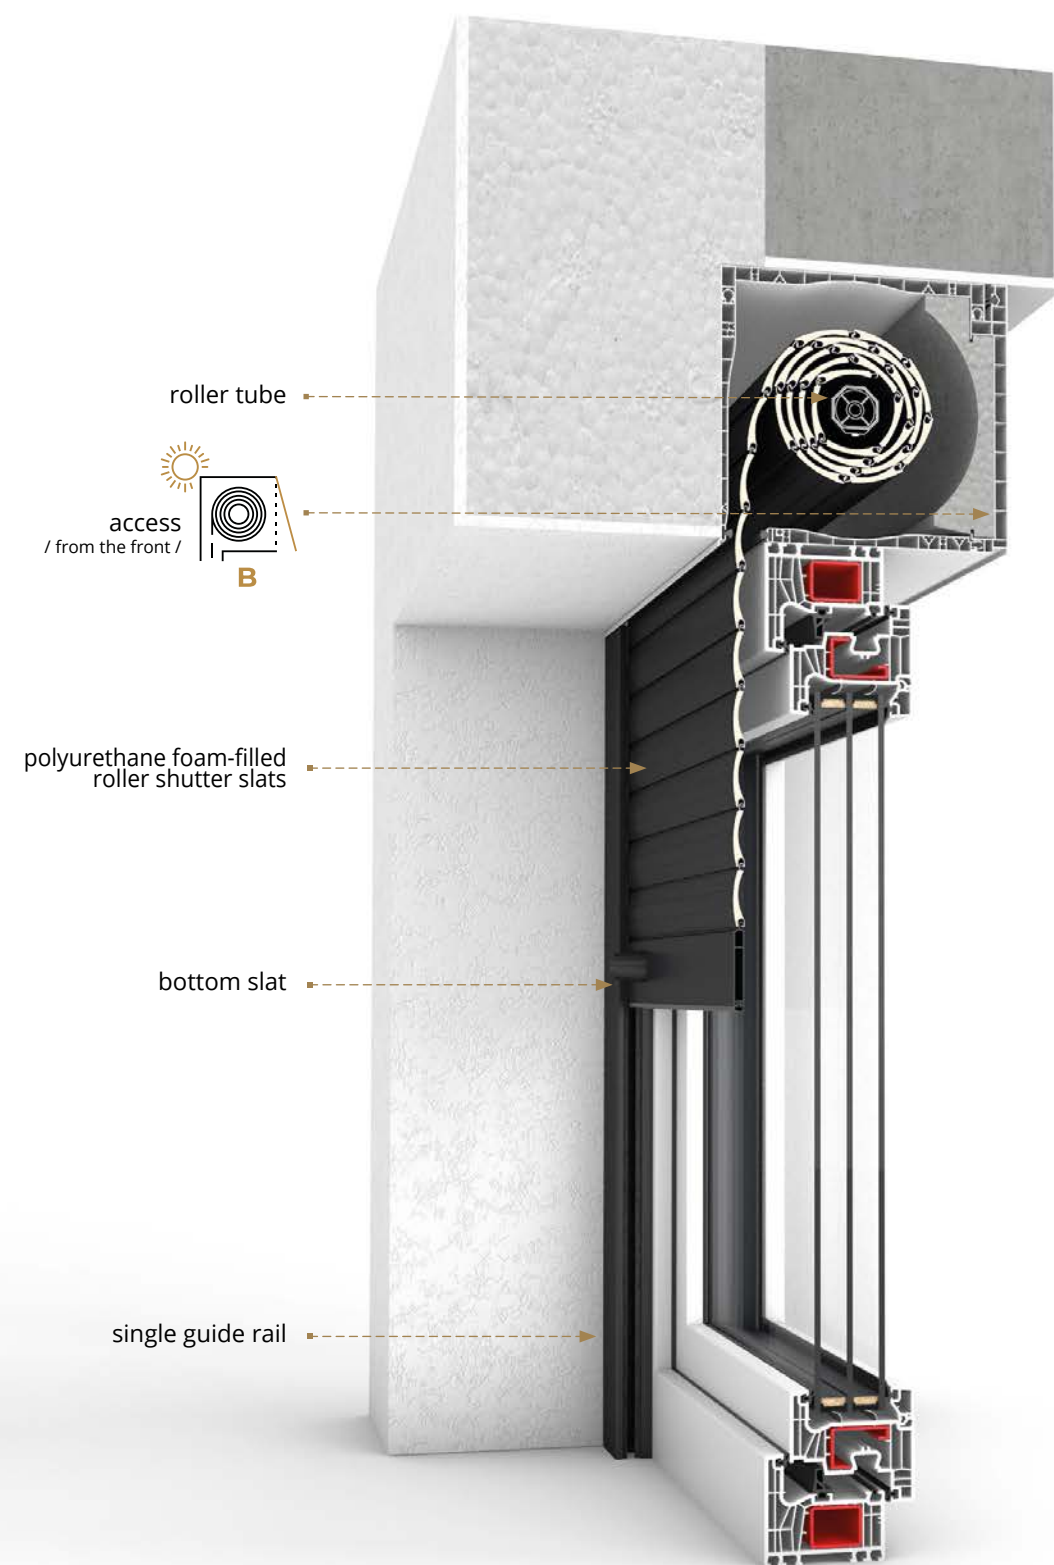

single guide rail

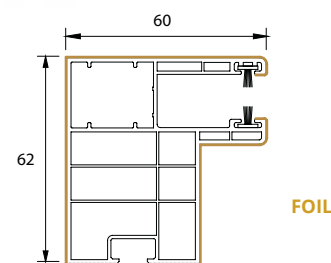

offset guide rail

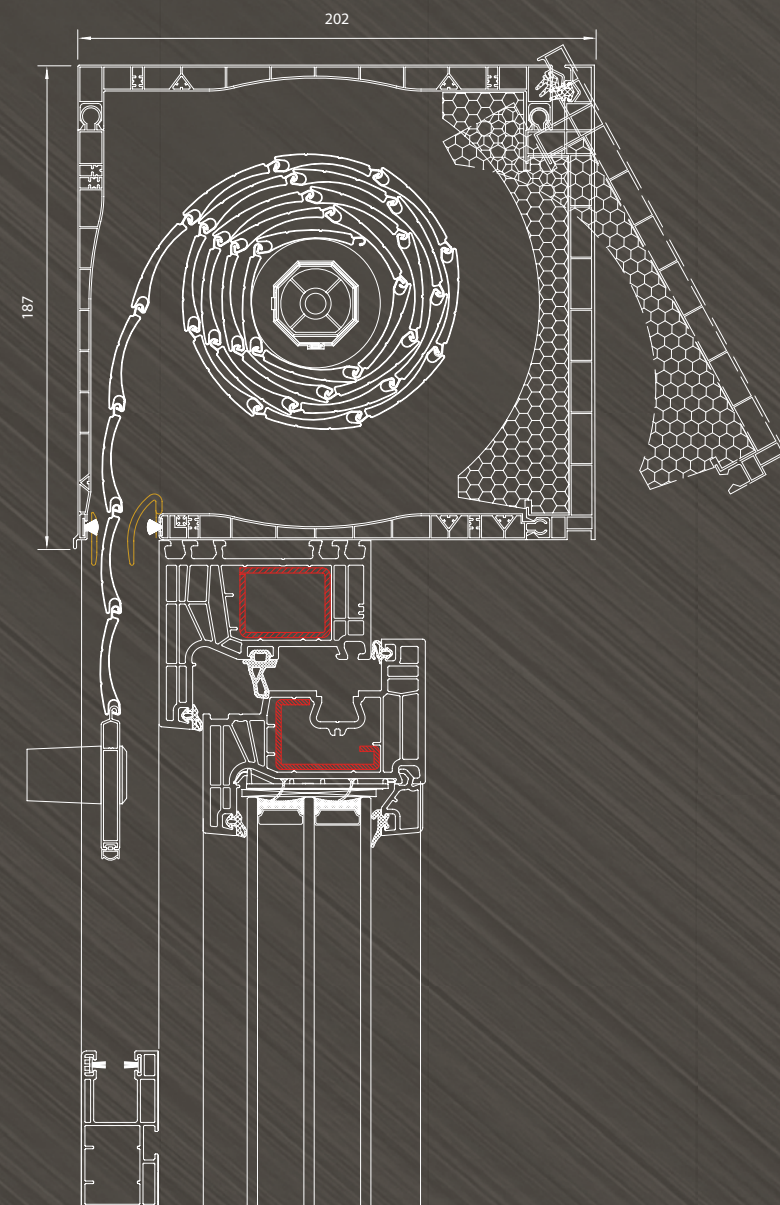

- headbox depth: 202 mm
- designed for markets with a mild climate
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm
- PVC and aluminum guide rails
- the system is designed for the use of a plaster carrier and plaster bead, ensuring an aesthetic integration of the roller shutter
- bottom slat with buffers
- pleated insect screen*
- possibility of mounting the roller shutter to the window
- GAVIOTA – aesthetic dedicated strap winder installed in the window frame on request
- 55 mm extruded bottom slat

* only with offset PVC guide rails
** for 185/202 mm box / for markets with mild climates /

LAVIUDA



185
installation height
/ mm /



202
installation depth
/ mm /


1,3**

U_{sb}



ALUMINUM SLATS

37mm | 42mm



front side

inspection access

PVC

ALUMINUM


guide rail materials

PVC, aluminum, wood
max. window frame width: 140 mm


compatible systems



RDZ | BUILT-IN ROLLER SHUTTER

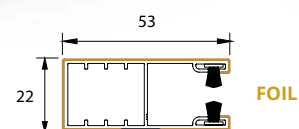

single guide rail

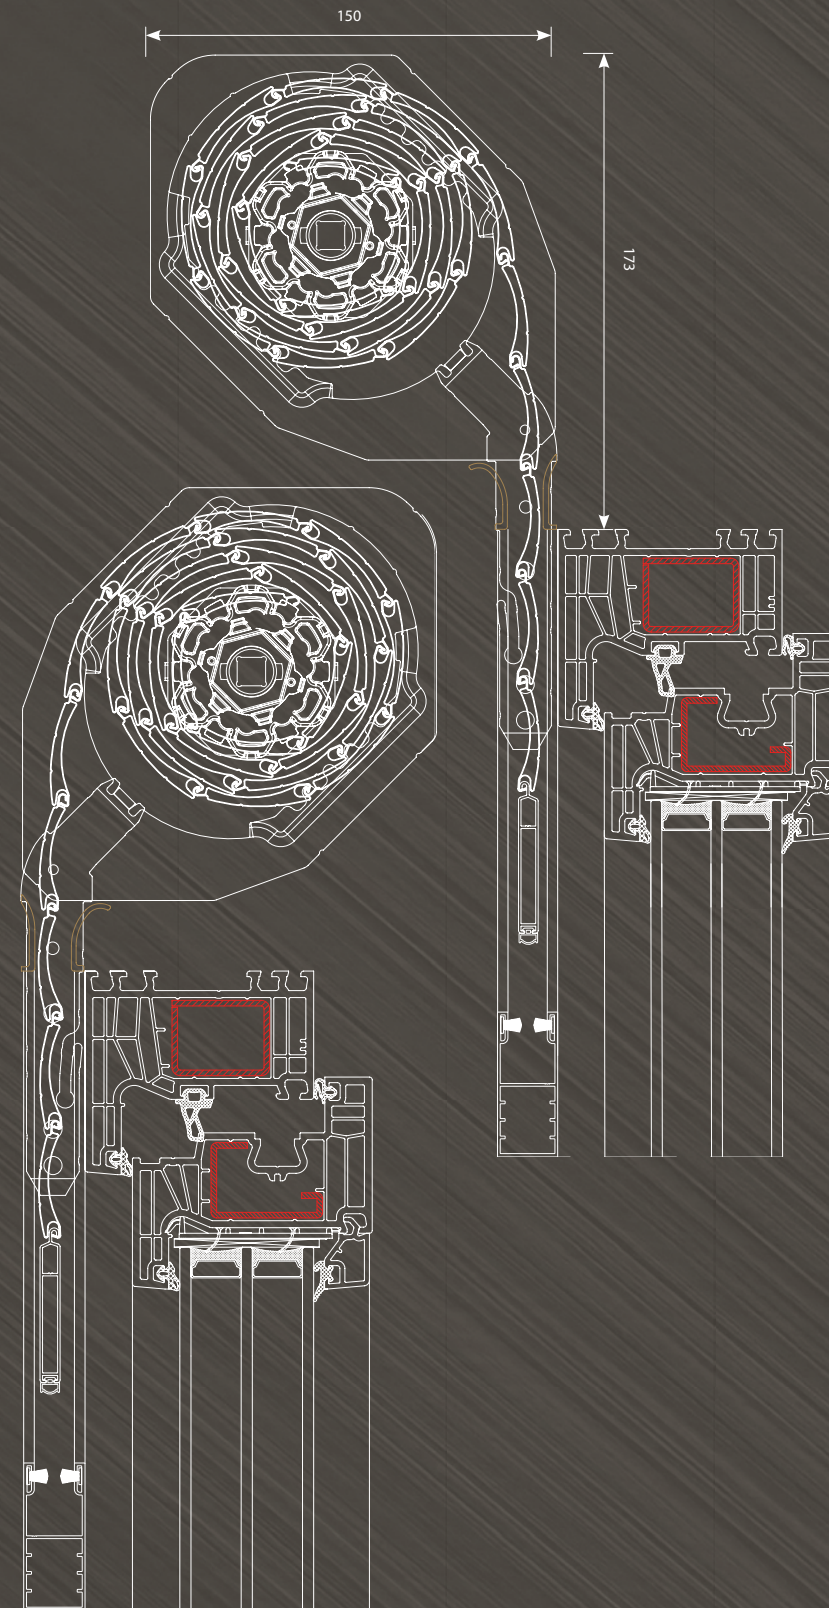

- the roller shutter system is designed for installation in a prepared lintel recess
- roller shutter supplied without box
- ideal solution for new builds where the design includes a roller shutter recess in the lintel
- equipped roller tube mounted on a bracket
- roller shutter curtain with bottom slat and hangers
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available aluminum slats: 37 mm, 42 mm
- aluminum guide rails
- bottom rail with concealed stopper
- 55 mm extruded bottom slat

RDZ



173
min. installation height
/ mm /




150
min. installation depth
/ mm /



ALUMINUM SLATS

37mm | 42mm

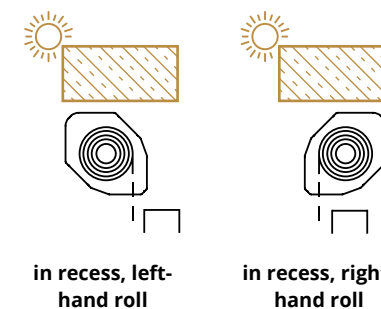

installation type

ALUMINUM

guide rail materials


PVC, aluminum, wood

compatible systems





Roller shutter curtain colours

Slats filled with polyurethane foam, with heights of 37 mm, 42 mm and 55 mm, are available in various colour options.

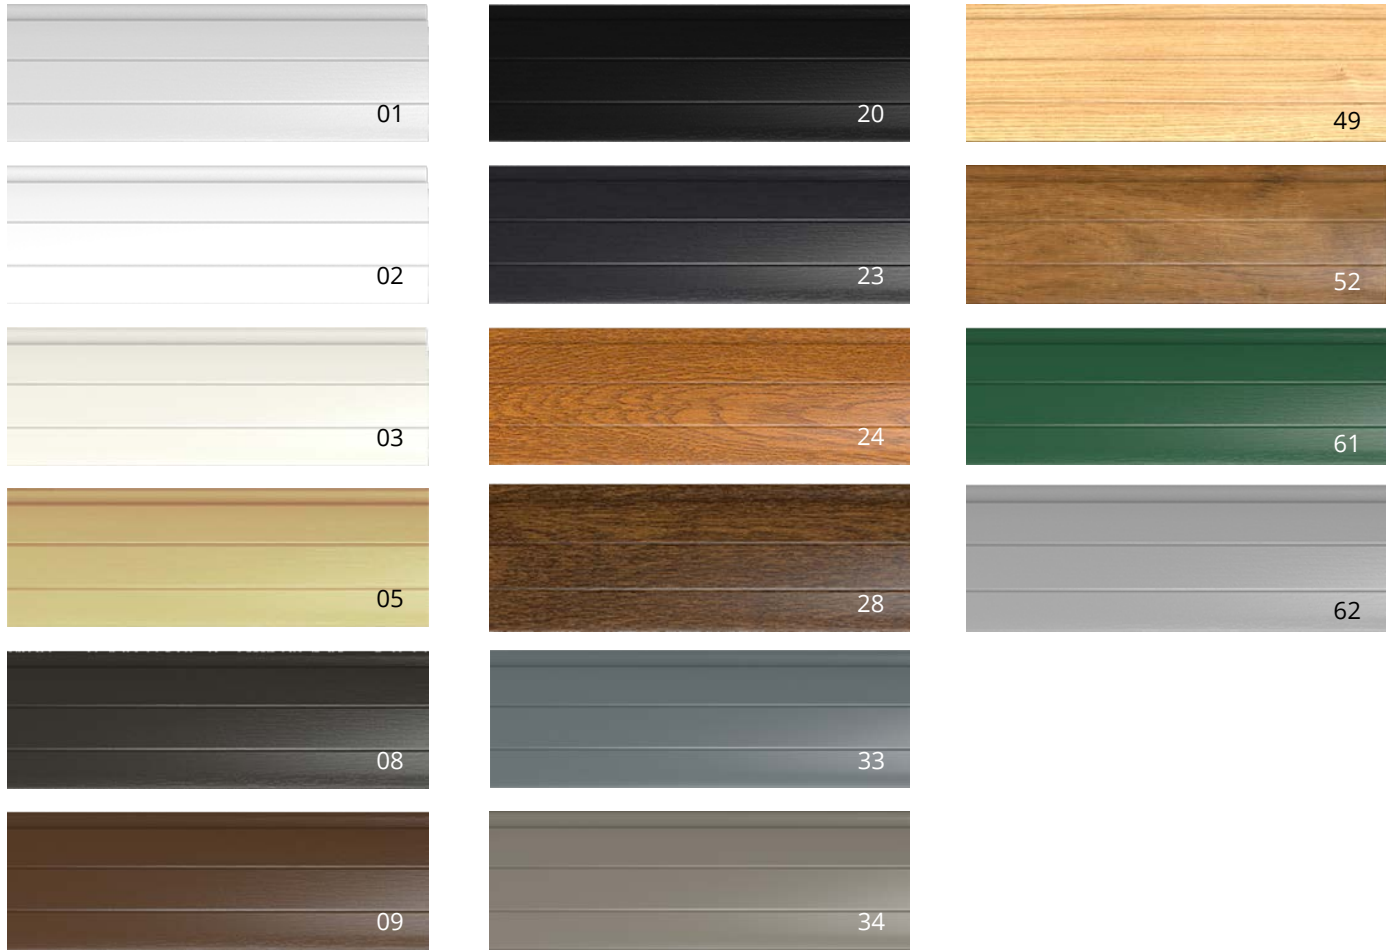

AVAILABLE COLOURS FOR INDIVIDUAL SLAT HEIGHTS


Colours for 37 mm and 42 mm slats



- | | |
|---------------|-------------------------|
| 01 silver | 20 black |
| 02 white | 23 anthracite |
| 03 grey | 24 golden oak |
| 05 beige | 28 walnut |
| 08 dark brown | 33 basalt grey RAL 7012 |
| 09 brown | 34 quartz grey RAL 7039 |

- | |
|-------------------|
| 49 Turner Oak |
| 52 Winchester |
| 60 ivory* |
| 61 moss green |
| 62 grey aluminium |

Colours for 55 mm slats



- | |
|---------------|
| 02 white |
| 03 grey |
| 08 dark brown |
| 23 anthracite |
| 60 ivory* |

* Available for 42 mm and 55 mm slats while stocks last.

Colours of roller shutter components

Roller shutters can be matched even more closely to the colours of windows and façades by applying decorative foils to selected system components.

A wide range of decors makes it possible to create an aesthetic and coherent combination of the roller shutter with the window joinery and the character of the building.





* The current list of available colours is available at www.drutex.eu and from your dealer.






EXTERNAL VENETIAN BLINDS


ZF-A | ALUMINUM EXTERNAL VENETIAN BLIND

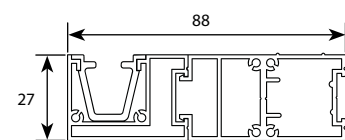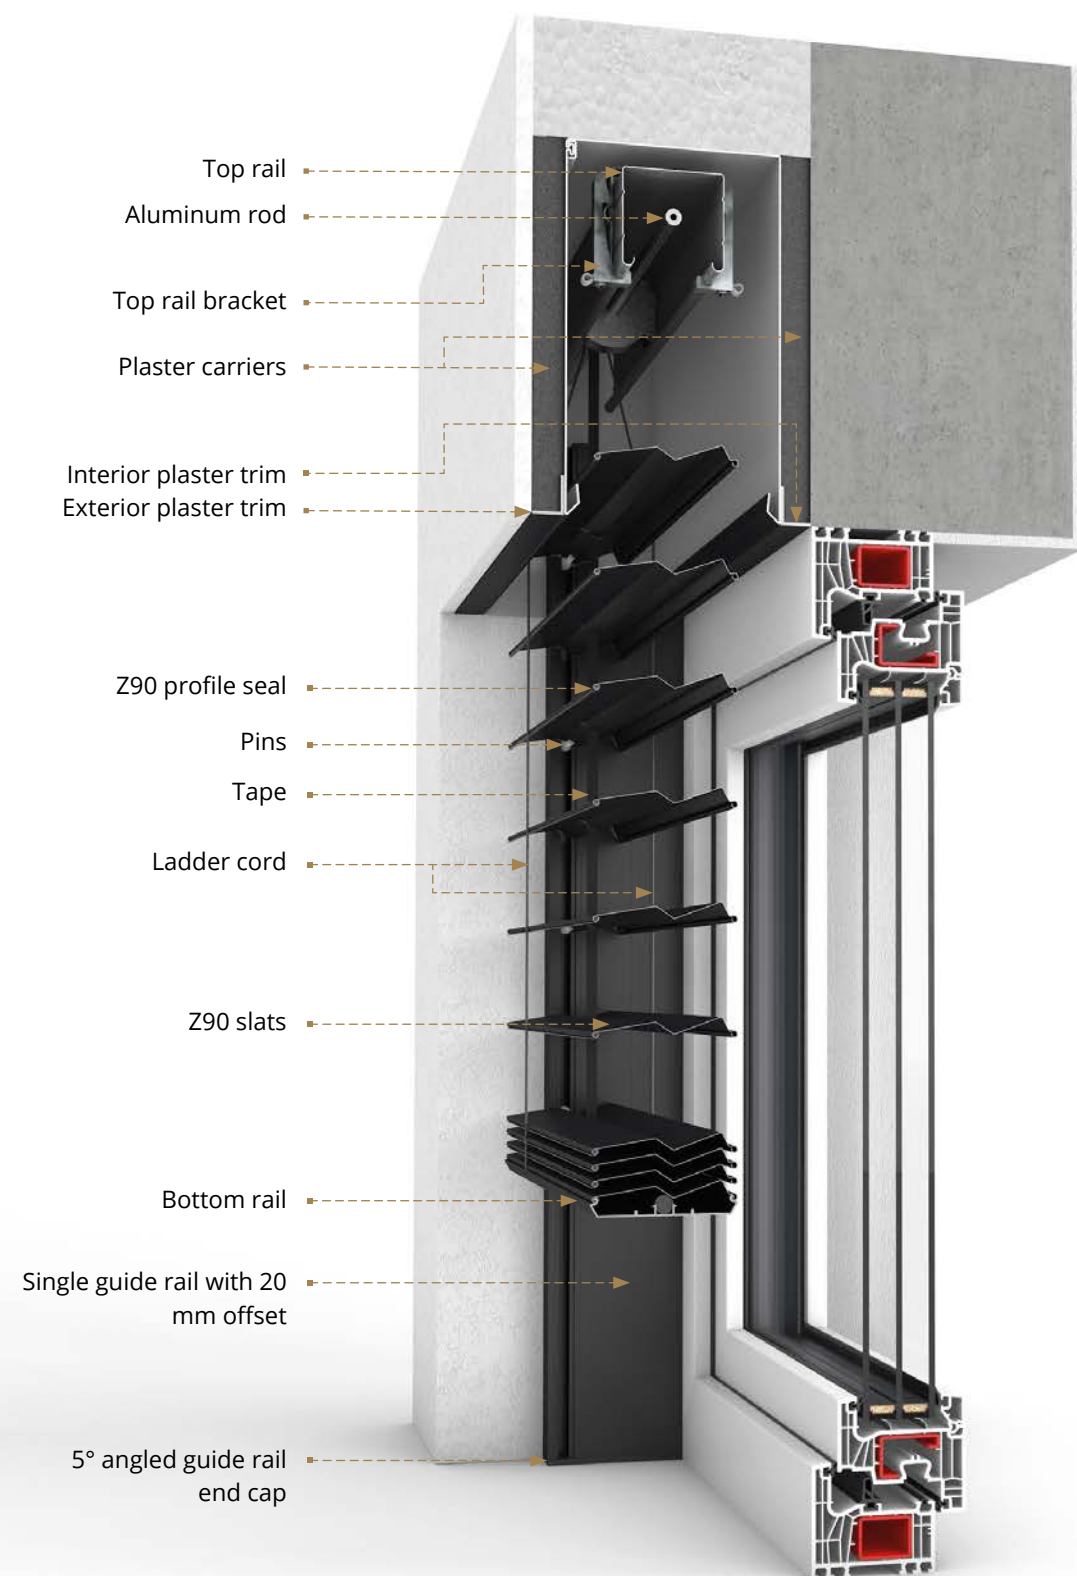

Single guide rail

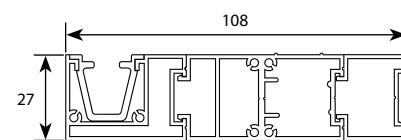

Single guide rail with offset

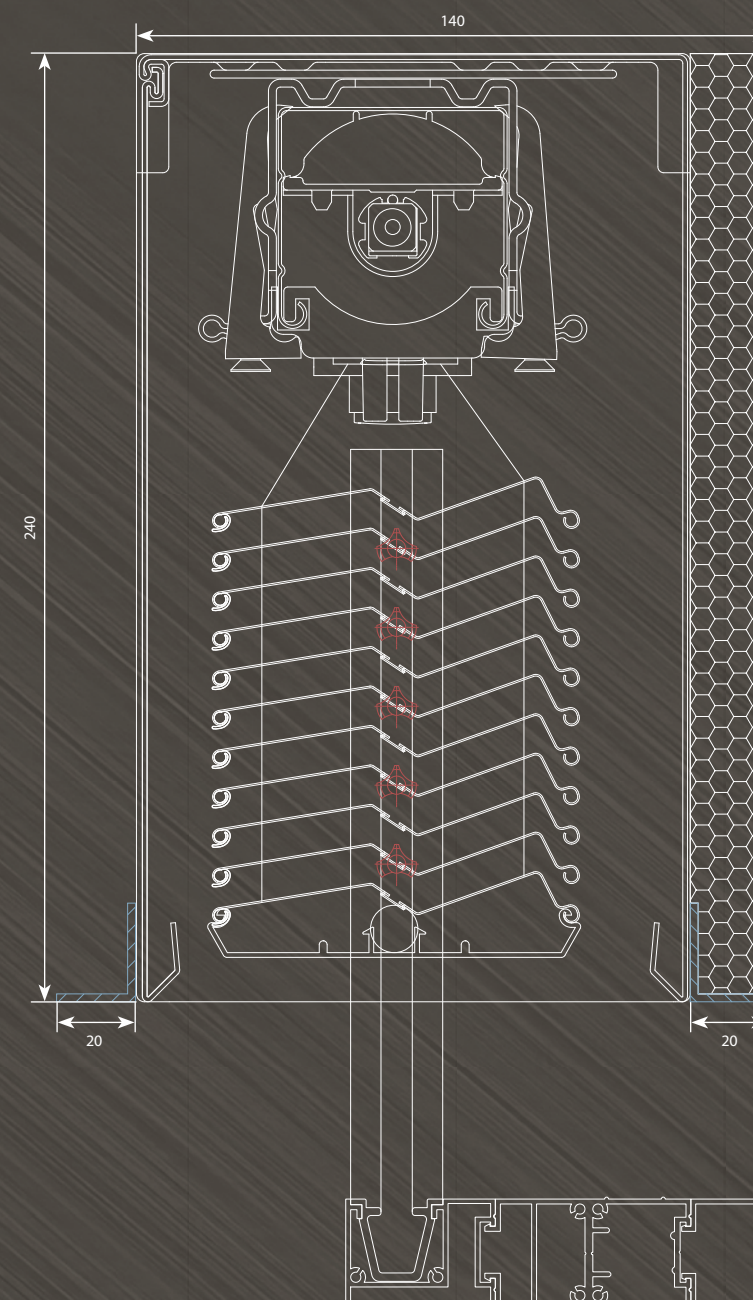

- Box depth 140 mm
- wide range of RAL colors
- available slats C80, Z90, S90
- pleated insect screens when using a spacer
- steel pins in the slats
- system prepared for the use of plaster carriers and plaster trims on the exterior and interior sides, ensuring an aesthetic finish of the box
- two-part guide rail – concealed mounting holes
- control the amount of light in rooms
- option to extend the power cable by 2.5 m, 5 m or 10 m
- Multi-stage slat adjustment, additionally C80 slat with 180° rotation – optional
- external venetian blinds reduce electricity consumption by air conditioning
- max. box width 4 m

ZF-A



140 / 240



140 / 300

Box dimensions
/ depth / height mm /



C80




Z90




S90

Slat type



on the façade



concealed



in the reveal



Installation type

ALUMINUM


Guide rail materials




ZF-A NEW | ALUMINUM EXTERNAL VENETIAN BLIND NEW

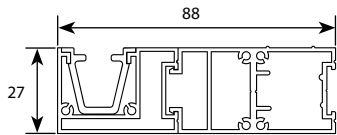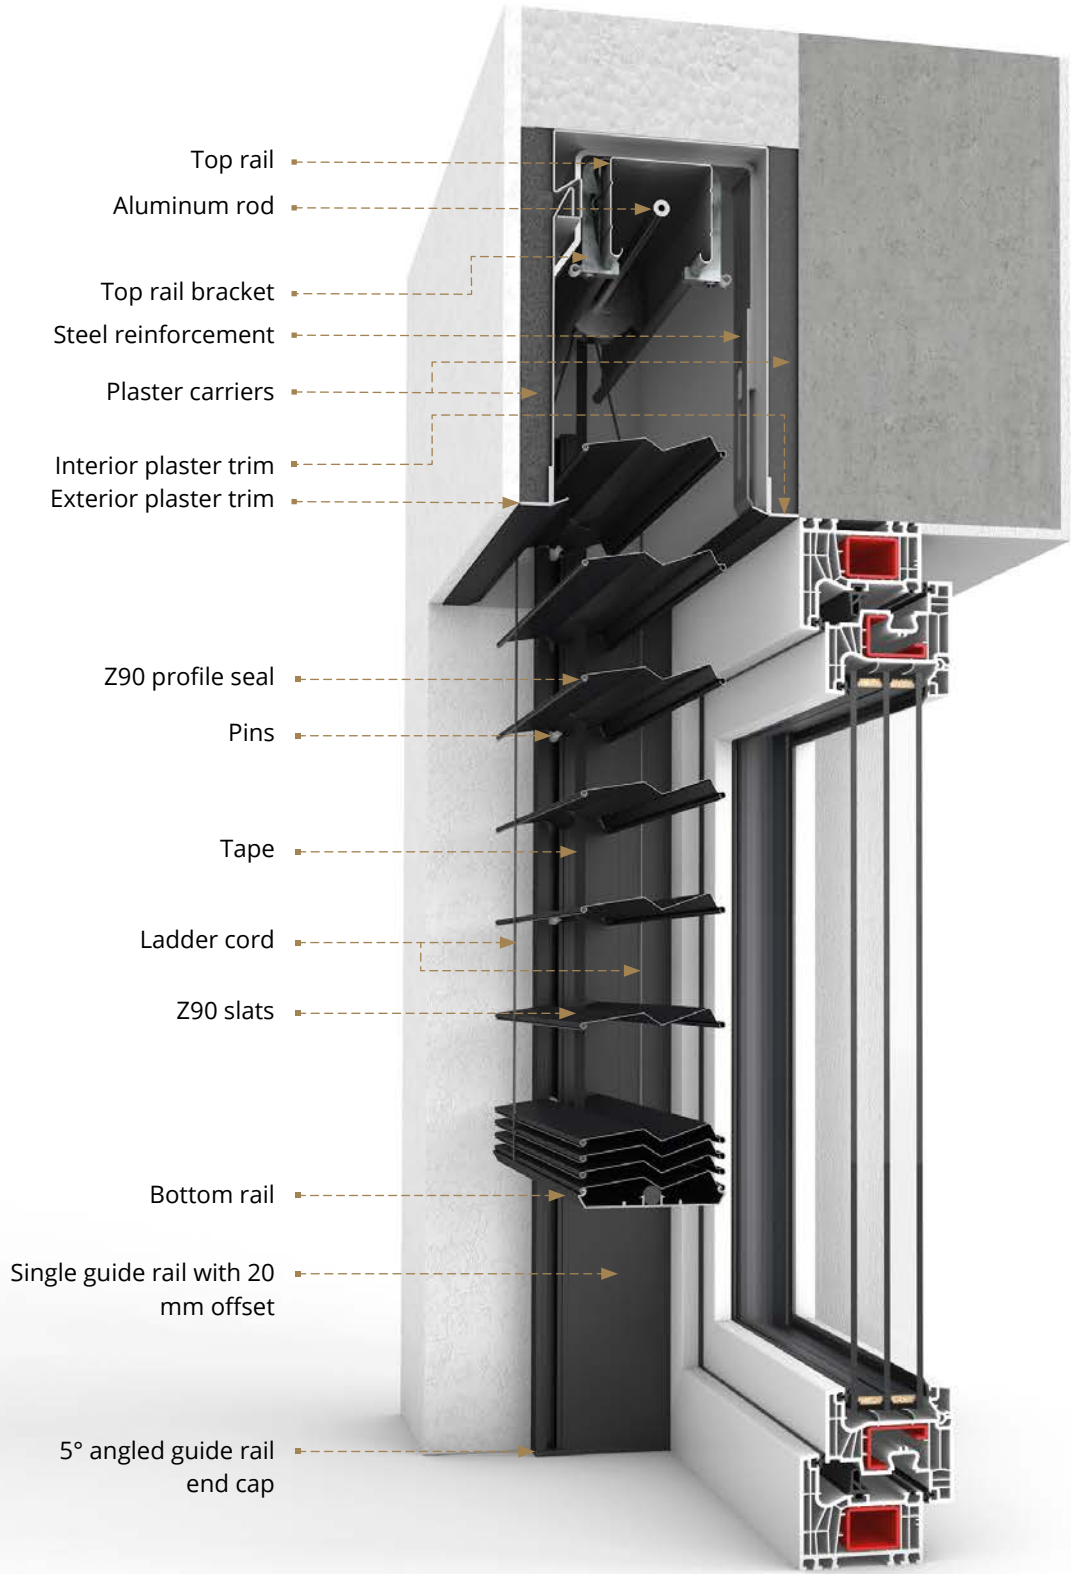

Single guide rail

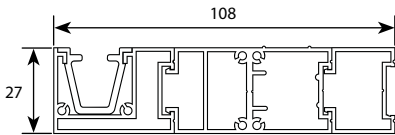

Single guide rail with offset

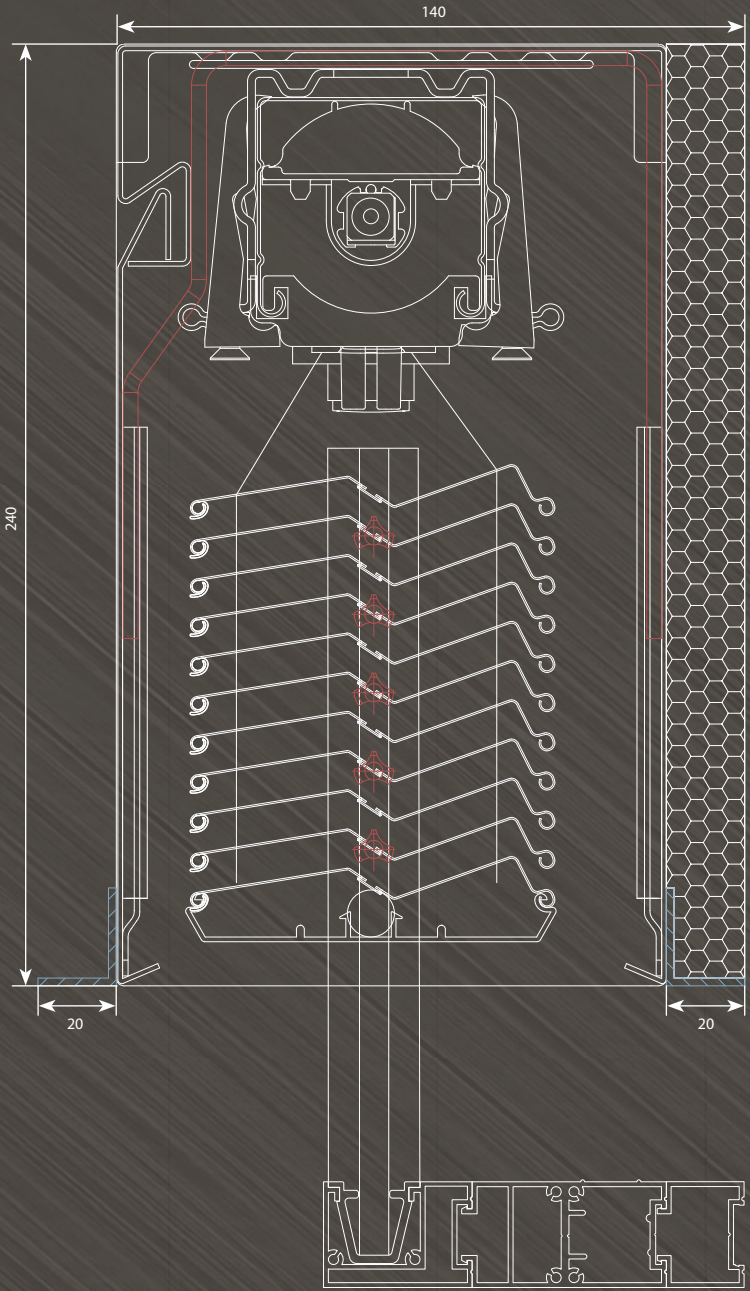

- Box depth 140 mm
- wide range of RAL colors
- available slats C80, Z90, S90
- pleated insect screens when using a spacer
- steel pins in the slats
- system prepared for the use of plaster carriers and plaster trims on the exterior and interior sides, ensuring an aesthetic finish of the box
- two-part guide rail – concealed mounting holes
- control the amount of light in rooms
- option to extend the power cable by 2.5 m, 5 m or 10 m
- Multi-stage slat adjustment, additionally C80 slat with 180° rotation – optional
- external venetian blinds reduce electricity consumption by air conditioning
- max. box width 5 m

ZF-A NEW



140 / 240



140 / 300



140 / 350

Box dimensions
/ depth / height mm /



C80




Z90




S90


Slat type



on the façade



concealed



in the reveal



Installation type

ALUMINUM


Guide rail materials



ZF-S | EPS EXTERNAL VENETIAN BLIND

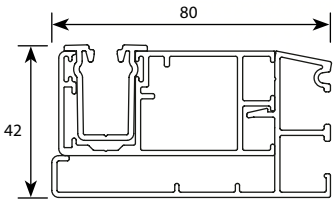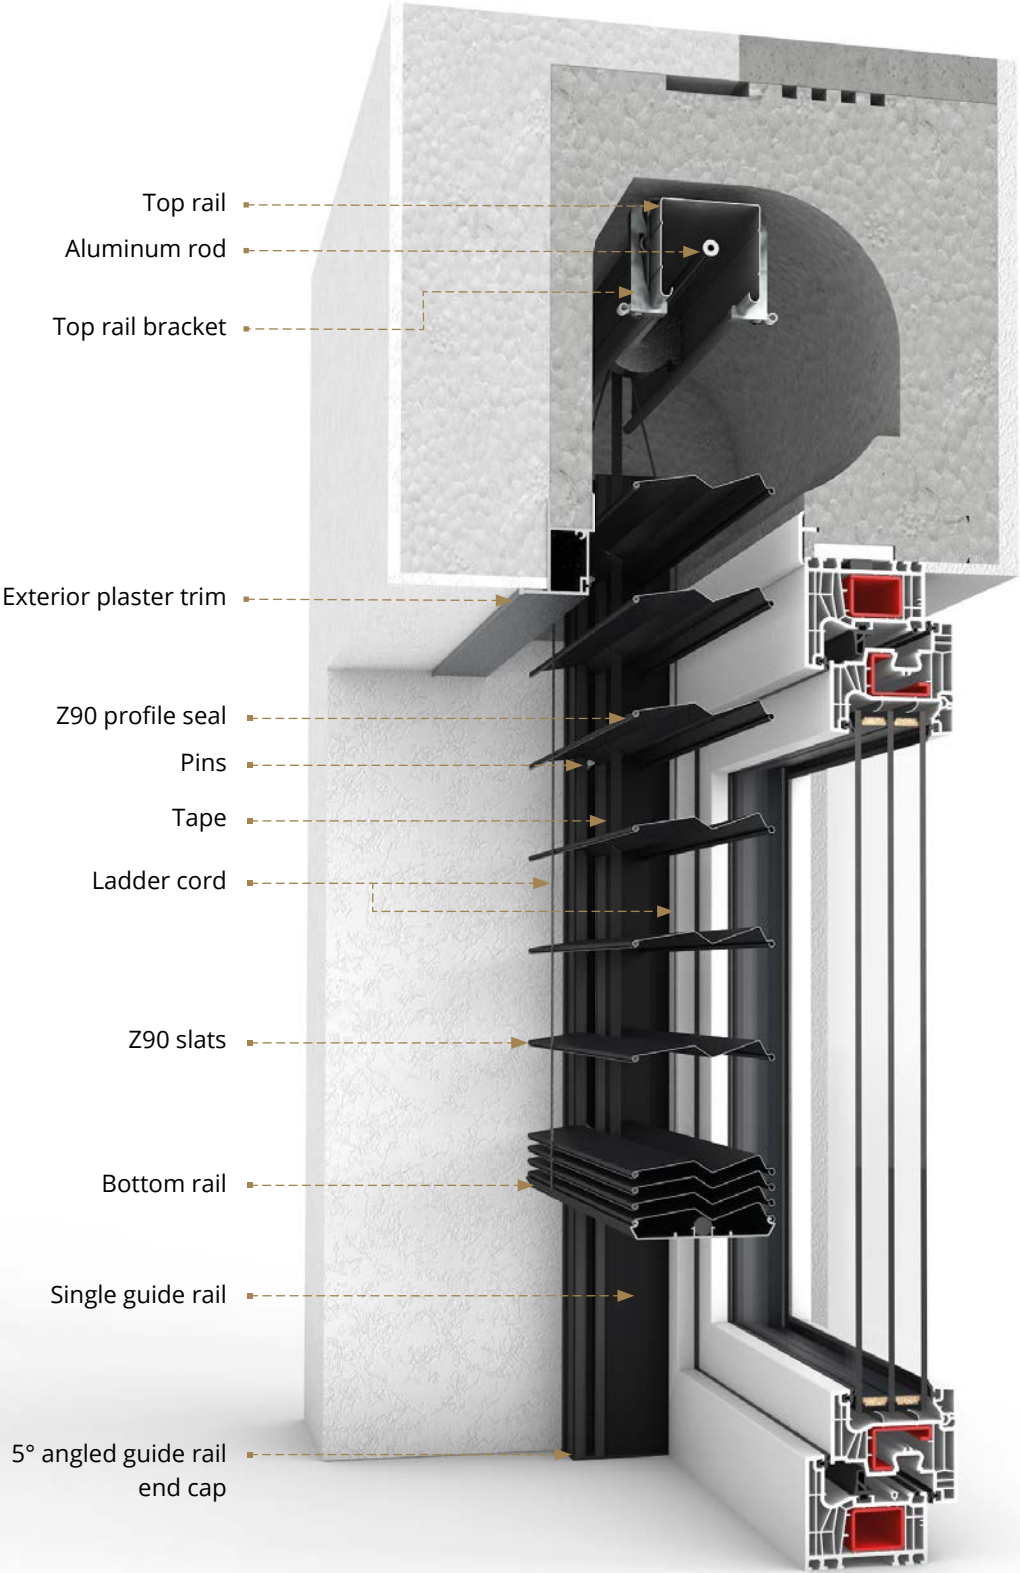

Single guide rail

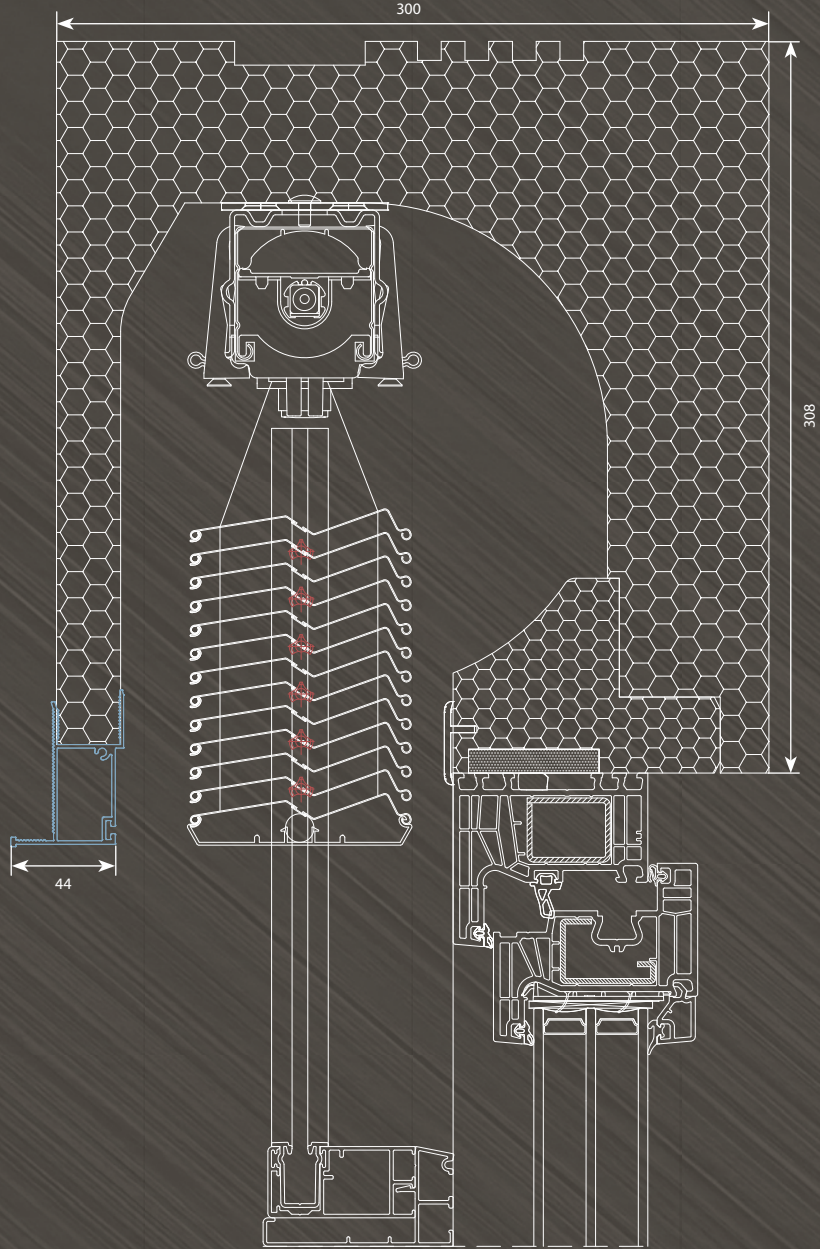

- high thermal and acoustic insulation
- wide range of RAL colors and decorative foils in line with the Drutex palette
- available slats C80, Z90, S90
- steel pins in the slats
- aluminum plastering strip
- control the amount of light in rooms
- option to extend the power cable by 2.5 m, 5 m or 10 m
- Multi-stage slat adjustment, additionally C80 slat with 180° rotation – optional
- external venetian blinds reduce electricity consumption by air conditioning
- aluminum guide rails as standard
- possibility of adding extra insulation inside the box

* for 308/425 mm box with additional box insulation

ZF-S



275 | 308

installation height
/ mm /



260 | 300 | 365 | 425

installation depth
/ mm /

0,20*

U_{sb}



C80




Z90



S90

Slat type



for built-in installation
Installation type

PVC

ALUMINUM

Guide rail materials

PVC, aluminum, wood

compatible systems



Available slat colours

Slats with widths of 80 mm and 90 mm are available in various colour options.



ALUMINIUM EXTERNAL VENETIAN BLIND

Available box sizes (W x H)
140x240 mm, 140x300 mm, 140x350 mm.



EPS EXTERNAL VENETIAN BLIND

Available box sizes (W x H)
260x275 mm, 300x308 mm,
365x308 mm, 425x308 mm.



AVAILABLE SLATS FOR EXTERNAL VENETIAN BLINDS



C80 slats



Z90 slats



S90 slats

Matt paints are used for adaptive roller shutters and external venetian blinds.

Drives and control

Modern solutions for external sun protection

Choose the right drive for your needs – radio, wired or solar

01 Radio-controlled drives

Convenient and modern wireless control – comfortable operation of roller shutters using a remote control.

SOMFY · YOODA · ELERO · MOBILUS



02 Wired drives

A classic and reliable wired solution for everyday roller shutter control.

SIMU · SELVE · SOMFY · YOODA · ELERO · GEIGER · MOBILUS



03 Solar drives

An energy-saving solution using solar power – convenience and independence.

SELVE · SOMFY · ELERO



04 Smart Home

Control your roller shutters from your smartphone and connect them to your smart home system for greater convenience, control and automation every day.

SOMFY · YOODA · ELERO · BLEBOX · MOBILUS

